

MECHANICAL POWERS.

PLATE I

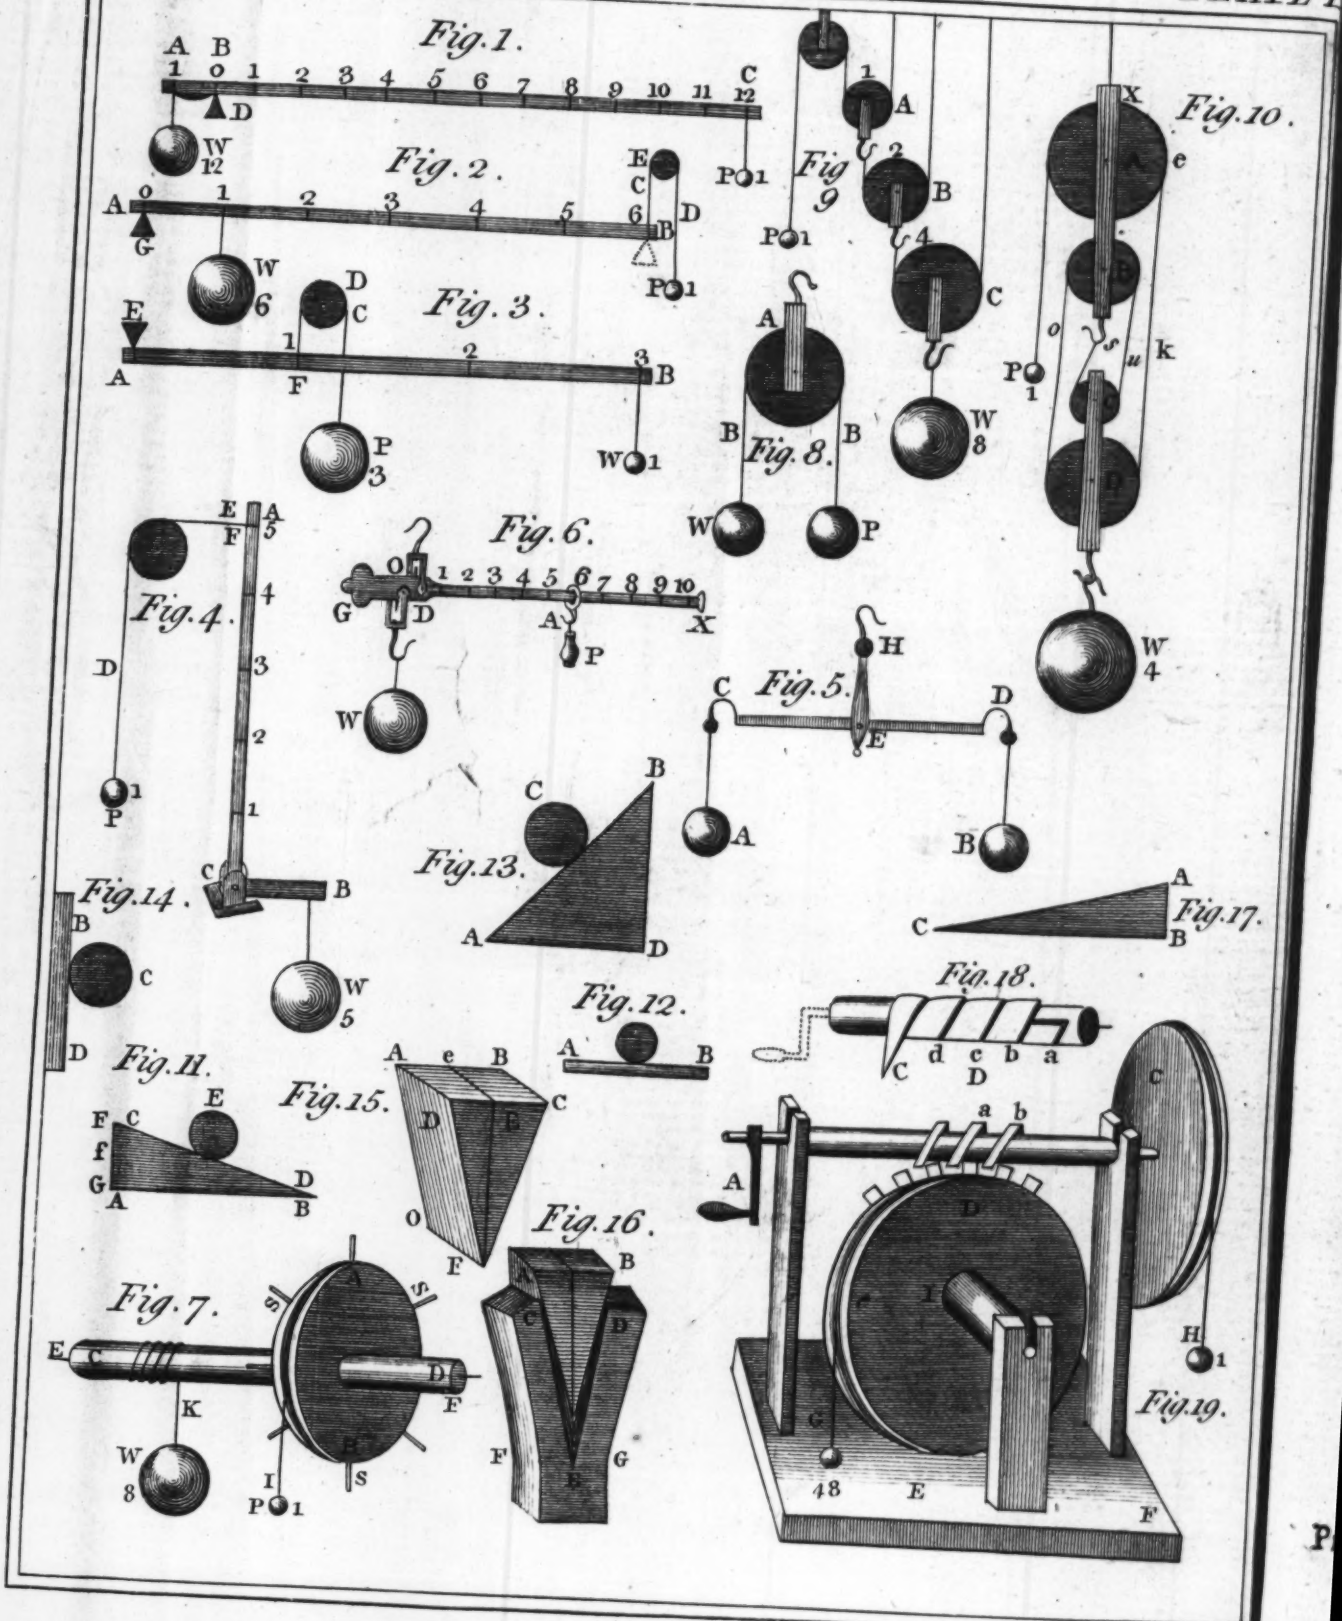

MECHANICAL POWERS.

PLATE I

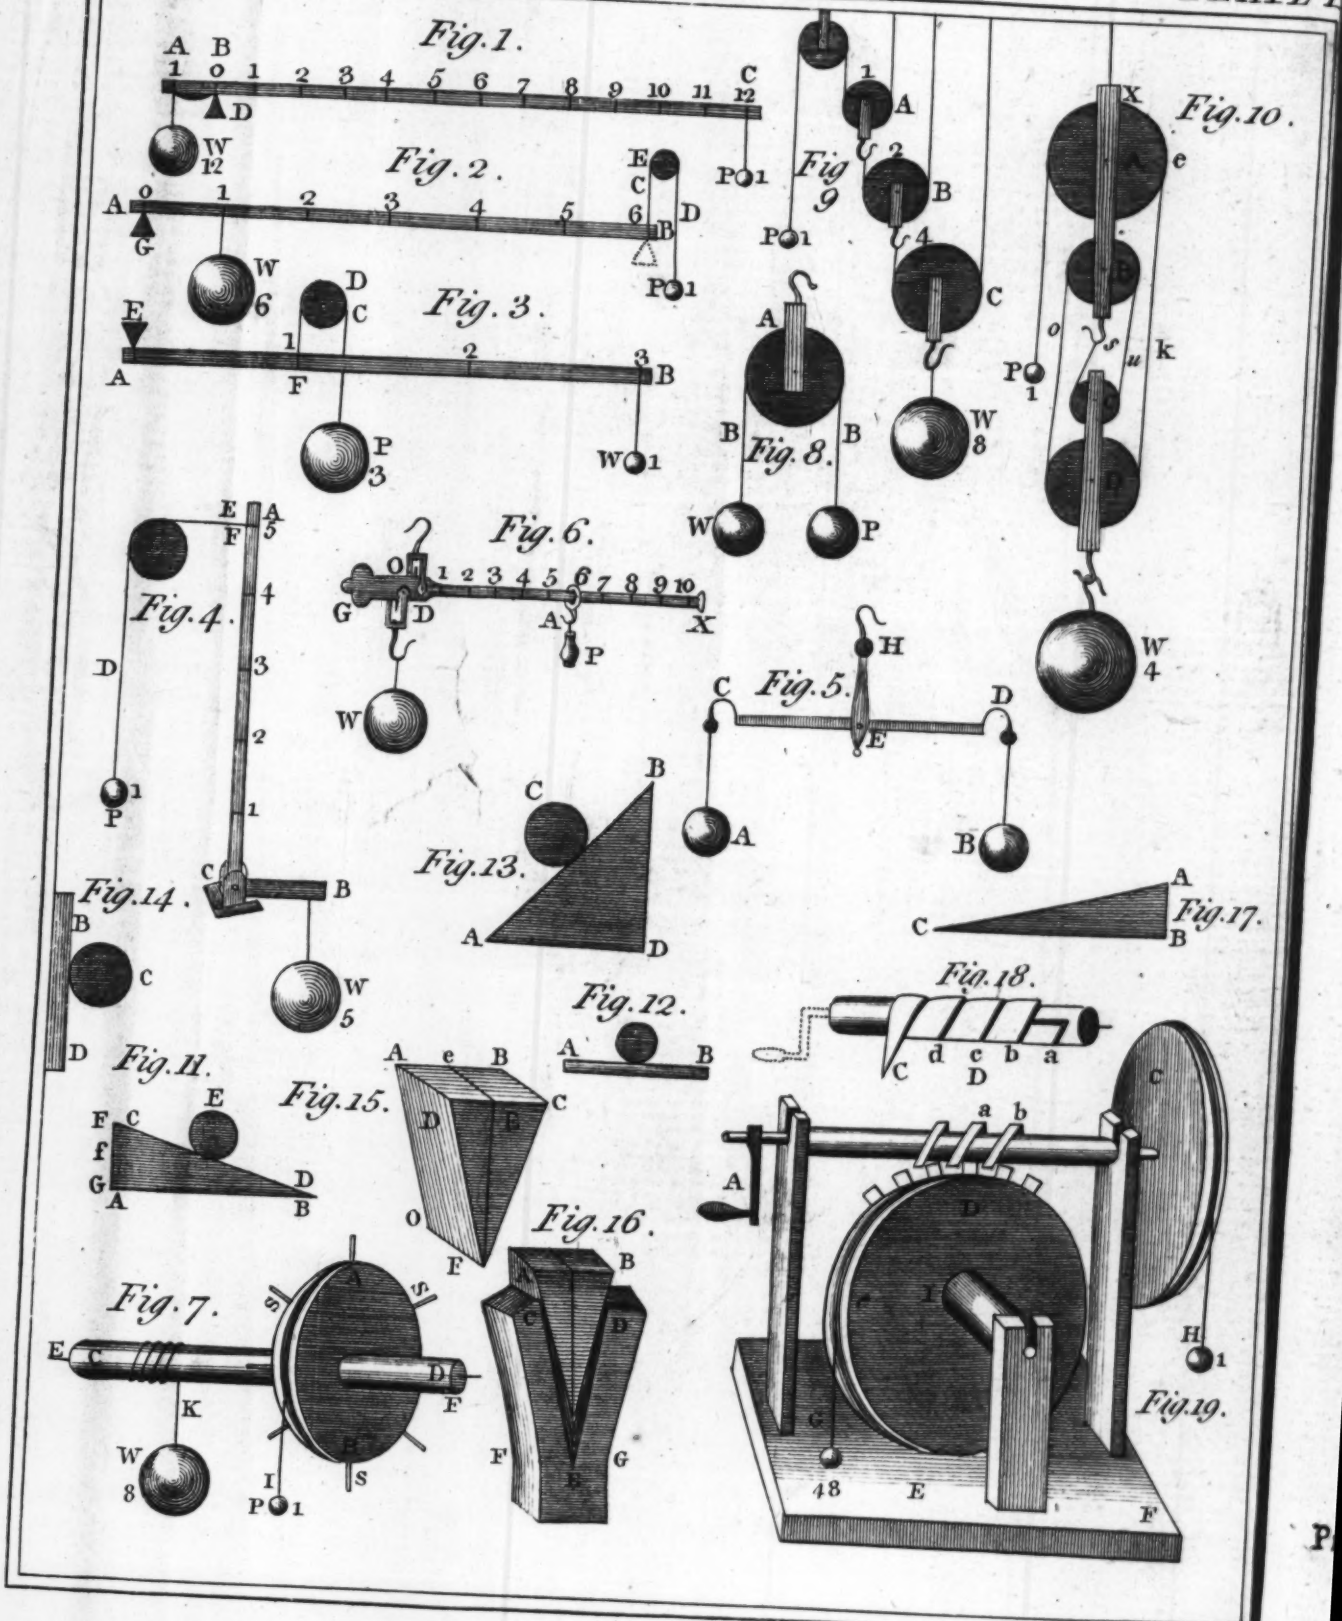

1509/585.

THE SCHOOL OF ARTS;

OR, AN

Introduction to Useful Knowledge:

BEING A COMPILATION OF

REAL EXPERIMENTS AND IMPROVEMENTS,

IN SEVERAL

PLEASING BRANCHES OF SCIENCE,

ON THE FOLLOWING SUBJECTS, VIZ.

Mechanics,
Electricity,
Pneumatics,
Hydrostatics and Hydraulics,
Optics,
Clock and Watch-making,
and
Astronomy.

The Miscellaneous Articles contain the most approved Art of

Drawing,
Etching,
Engraving,
Mezzotinto Scraping,
Aquatinta,
Crayon Painting,
Gilding on Glass, Pots, &c.
Silvering Looking Glasses, &c.
Lackering,
Varnishing,
Soldering,
Casting in Plaster, &c.
Cements,
Glues,
Metals for Speculums, with the whole Process of Grinding, &c. &c.
Staining Wood,
A Composition for Ornaments,
Objects for the Microscope, &c. &c. &c.

THE FOURTH EDITION,
WITH VERY CONSIDERABLE ADDITIONS.

By JOHN IMISON.

London:
Printed for J. MURRAY and S. HIGHLEY, No. 32, Fleet-Street.

1796.

BRITISH MUSEUM
15 NOV 21

TO

SAMUEL MORE, Eſq.

Secretary to the Society inſtituted at London, for the Encouragement of Arts, Manufactures, and Commerce.

SIR,

IT is with propriety that the following pages are inſcribed to you. A Treatiſe upon the Arts ſhould have a Patron who underſtands the ſubject. No perſon will deny that you are competent to judge upon this point. And although I acknowledge my diffidence, when I think that my Work is to be ſubmitted to a perſon of your ſkill and diſcernment, yet I own that I am in

ſome degree flattered, that my performance is not wholly deſtitute of merit, ſince you are kind enough to accept what I now preſent.

It is with pleaſure alſo that I take this opportunity of publicly acknowledging the obligations I lie under to your friendſhip and good offices in many inſtances, and that I am, with gratitude and eſteem,

SIR,

Your obedient

and very humble ſervant,



John Imiſon.

THE PREFACE.

WHEN I first compiled the following sheets, they were not intended for the press, but for my private amusement, because they contained the principal matters of what I had either read, seen, or experienced; or indeed what accorded to my inclination upon these subjects. I laboured daily to increase my little store; and, having an extensive apparatus, I carefully proved every experiment before I gave it a place in my repository. I have also tried a variety of other experiments from Smith, Barrow, Salmon, &c. &c. without the desired success; which was one principal motive for the present publication, as it is my wish that my labours may prove useful to those whose ingenuity may lead them to practise and improve upon my experience. — I have given, without reserve, the best descriptions I could collect of every thing I have treated; and I can affirm, that every page in the book contains matter of real value when applied to practice.

Numerous

ſome degree flattered, that my performance is not wholly deſtitute of merit, ſince you are kind enough to accept what I now preſent.

It is with pleaſure alſo that I take this opportunity of publicly acknowledging the obligations I lie under to your friendſhip and good offices in many inſtances, and that I am, with gratitude and eſteem,

SIR,

Your obedient

and very humble ſervant,



John Imiſon.

THE PREFACE.

WHEN I first compiled the following sheets, they were not intended for the press, but for my private amusement, because they contained the principal matters of what I had either read, seen, or experienced; or indeed what accorded to my inclination upon these subjects. I laboured daily to increase my little store; and, having an extensive apparatus, I carefully proved every experiment before I gave it a place in my repository. I have also tried a variety of other experiments from Smith, Barrow, Salmon, &c. &c. without the desired success; which was one principal motive for the present publication, as it is my wish that my labours may prove useful to those whose ingenuity may lead them to practise and improve upon my experience. — I have given, without reserve, the best descriptions I could collect of every thing I have treated; and I can affirm, that every page in the book contains matter of real value when applied to practice.

Numerous

Numerous are the authors who have written upon the miſcellaneous part of theſe ſubjects; but few of them have proved by actual experiment what they have aſſerted; and indeed this is not to be wondered at, when it is known that experiments are attended with much expence. And although I have uſed my beſt endeavours, yet I will not aſſert but that better methods, in ſeveral things, may be diſcovered: nevertheleſs, the reader may rely that the facts I have advanced will bear the teſt of any enquiry.

The particular branches of ſcience which I have endeavoured to explain, are thoſe of the Mechanical Powers, Electricity, Pneumatics, Hydroſtatics and Hydraulics, Optics, and Aſtronomy; a treatiſe on Clock-making, the nature, uſe, and conſtruction of the Barometer, and the conſtruction of optical and many philoſophical inſtruments; all which, I flatter myſelf, the ſtudents will find to be exact, whether they are conſulted with a view to theory or practice.

A knowledge of the mechanic powers is now become a part of polite education; and their utility is manifeſted by daily experience; therefore ſuch definitions, poſtulates, and axioms, are premiſed as were thought neceſſary to form a right conception of the principles, ſo as to form a juſt idea of their application on any particular occaſion; and as my reaſoning on theſe ſubjects has been general, ſo no regard has been paid to the weight of the beam or lever, it being well known

known that these must be equipoised before such theorems can be applied.

So many books have been written upon the subject of the Arts and Sciences, that any person would imagine that more would be superfluous. Books, however, which have been written by authors of credit, are very expensive and very voluminous; and it would take too much time to read over and attain a thorough knowledge of the doctrine they contain. In the present performance every thing is rendered familiar to the meanest capacity; and with a little practice and perseverance, the most illiterate artizan cannot fail of making a considerable progress in almost every art and science it treats of: besides, every artificer cannot furnish himself easily with the best authors upon all the subjects contained in this Work; the expence of which and waste of time, would be too considerable. I have inserted not only known useful rules upon the subjects I have noticed, but a great many others that are entirely new, and of very great use, both in theory and practice, to the working mechanic.

I pretend not to communicate my ideas with the embellishments of elegant language; my employment as a mechanic pleading an excuse for errors or inaccuracies in this respect; but I have endeavoured to be plain, exact, and intelligible, and my meaning will

not

not be misunderstood by those who pay competent attention to my book.

In the Miscellaneous part of this performance, many secrets are discovered that are worthy of attention; a great number of which were never before published. Some apology may be thought necessary for divulging them; but as I obtained my knowledge chiefly by my own industry and unwearied application, I have a right to communicate it for the benefit of young experimenters, till they can procure better assistance, or be enabled to strike out better methods of improvement by their own experience. At a future period I intend to publish another Volume, as an Appendix to this; wherein I shall lay down every calculation in different mill-works, water-works, steam-engines, &c. together with a variety of useful rules for the working mechanic; to which I shall also add sundry Miscellaneous Articles.

The most valuable improvements in arts and sciences which have appeared of late years, are, 1. Messr. Watts and Bolton's Steam-Engine; *a brief description of which I have given in the following Treatise:* 2. The Rev. Mr. Cooke's Drill-Plough *; *and although I have not admitted an account of it in this Treatise, yet I cannot help observing concerning it,*

* See Description in his Drill Husbandry perfected, price 1s: published by Mr. Murray; also, Young's Memoirs of Agriculture, &c.

that

hat it is an aſſemblage of the mechanic powers ſimply diſpoſed to great advantage, ſo as to aſſiſt that important deſign of the inventor, the improvement of agriculture, in the beſt manner yet attempted: 3. A Teleſcope: *which is the moſt noble inſtrument of the kind ever conſtructed, and which diſplays Dr. Herſchell's optical and aſtronomical abilities beyond all of his cotemporaries.*

Before I conclude, I muſt acknowledge my obligations to Mr. James Wood, *oppoſite the Sunday Toll-Bar, Kent-ſtreet Road, Southwark, late Collector for the London Bridge Water-Works; whoſe extenſive knowledge, both in theory and practice, of every ſcience, is greater than is generally to be met with united in one perſon; and to him I would recommend thoſe gentlemen who are in want of curious models in every branch of experimental philoſophy.*

BRITISH MUSEUM
15 61
NOV

INDEX

TO THE

Introduction to Useful Knowledge.

Page

A

AIR rarefied by the electric spark 66
inflammable to make 73
properties of the 99
the weight of determined 101
the vivifying spirit in 105
pump, the construction of 109
resistance of 112
to shew the weight of 113
the pressure of, in the barometer proved 118
the weight of to shew 119
the pressure of 120
the elasticity of 121
the expansion of 123
pump, by whom invented 127
— miscellaneous experiments on it 125
the sudden release of dangerous 128
gun, a description of 141
to condense in the ball 141
the specific gravity of 157
Amalgam, to make 96
Astronomy 297
characters explained 310
Attraction electrical 44
Aurum mosaicum to make 96

B

Balance, the 8
Barometer, construction of 129
phænomena of 134
tube to fill 138
diagonal 139
the horizontal rectangular 139
the wheel 140
Bevel geer, of 34

C

Calculation in clock-work 284
Camera Obscura 268
Circles, the circumference of, to divide 281
Clay, electrical experiment on 64
Clock-work 273
the names of the parts of a ibid.
Cogs and staves to set out 33

Compositions

Page

Compoſitions for lining globes and cylinders 97
Conduit, of pipes 173
Cycloid to deſcribe 36

D

Damps, cauſe of 106
Dancing balls, electrical 54
Diſcharger, univerſal one 66
Diſtance horizontal, of ſpouting water 165

E

Earth 300
Earthquakes, cauſe of 109
artificial, how made ib.
Eclipſes 310
why ſo few 312
limits of ib.
period of 317
Electricity, brief hiſtory of 37
ſubſtances ſet on fire by 48
the influence of points in 51
medical 88
technical terms of 93
Electric fluid, of the 41
to diſturb the equilibrium of 42
Electrical attraction and repulſion 44
balls 46
ſpark 47
machine deſcribed 49
Electrical machine, conſtruction of 50
horſe race 53
dancing balls 54
battery 58
ſpider 62
orrery 74
—— another 76
piſtol 74
apparatus, rules for uſing 81

Page

Electrics become conductors when hot 55
Electric fluid prefers a ſhort paſſage 64
courſe of rendered viſible 68
Electrometer 65
quadrant 78
Electrophorus 86
Engine for raiſing water, Sieur Vera's 181
for raiſing water by fire 112
Mr. Watt's improvements 185
Epicycloid to deſcribe 36
Eye, a deſcription of the human 192
properties of 196

F

Fermentation, cauſe of 107
Fire damps 108
Fluidity, of 146
Fluids, particles of, what 147
vacuities in ib.
vacuities in them proved ib.
have gravity in their own elements 164
Florentine experiment 149
Force of a moving body, how found 6
Friction, of 24

G

Georgium Sidus, planet of 308
Glaſs, multiplying 267
Gun, the air 141
to fill with air ib.
magazine 142

H

Helioſtata 271
Hydraulics and hydroſtatics 143

Hydraulics

Page

Hydraulics, definitions 143
aphoriſms 144
Hydrometer 153
another 154
how to uſe ib.
the patent 157
Hydroſtatical balance 150
to weigh any thing therein 153
paradox 160
bellows 161

I

Image of an object, altho' inverted, appears upright 195
only ſeen thro' a reflecting teleſcope 263

J

Jar, to ſhew how it charges and diſcharges 73
Jupiter, the planet 304
the belts and ſpots of ib.
has no change of ſeaſons ib.
has four moons 305
their periods found ib.
2 diſcoveries made by their eclipſes 306

L

Lead, how made to ſwim in water 163
Levers in general 7
the firſt kind of 10
properties of 11
ſecond kind of 12
properties of 13
third kind of ib.
properties of 14
fourth kind of ib.
properties of ib.
Leyden vacuum 69
Luminous word 72

M

Magazine, air gun 142
Man, may raiſe himſelf by his breath 161
Mars, the planet 303
Mechanics, definitions of 1
poſtulata of 3
axioms of 4
foundation of 6
Mechanical powers 7
Medical electricity 88
Megalaſcopes for large objects 227
Mercury the planet 298
Micrometer, nature and uſe of 240
Microſcopes 210
form of a convenient one 213
magnifying power, how found 214
ſingle, for opaque objects 216
Wilſon's ſingle pocket 220
pocket, with a reflecting ſpeculum 224
ſingle, on a ſtand 226
compound 228
the deſcription and uſe of 229
compound, magnifying power of computed 200
ſolar, or camera obſcura 234
method of uſing 236
diagram of the 243
Mills, rules for the conſtruction of water 29
model of one turned by electricity 76

	Page
Monſoons	105
Moon	300
nodes of the	312
motion of the	316
north and ſouth latitude of the	315
Movements, the numbers of ſeveral ſorts of	292
Multiplying glaſs	267

N

Nodes, the line of the	312
the aſcending and deſcending of the moon	315

O

Objects, why ſeen coloured thro' a teleſcope	255
glaſſes, how to try the goodneſs of	257
Optics	192
definitions of	196
practical part of	205
Orrery electrical	74
anoth	76

P

Pendulums, the length of to find	279
Plane inclined	20
power of the	ib.
Planets, probably all inhabited	297
Pneumatics	98
Powder houſe	71
Pyramid	72
Power of mechanics to compute	7
Proof ſpirits, the weight of a gallon	156
Pulley	17
moveable ones	18
Pump, by whom invented	168
the common or ſucking	ib.
work, preſſure on the pipes of	171
diſpoſition of	172
the lifting	175
the forcing	176
M. de la Hire's	177
Mr. Noble's	181

Q

Quadrant, electrometer	78

R

Repeating work	295
Repulſion, electrical	44

S

Saturn, the planet	306
his ring	ib.
has five moons	307
place of his nodes	308
Scales, the properties of	9
how proved	10
Screw	22
the force of	23
Spark electric, viſible in water	70
Spectacles	206
Spiral tube	63
Spirits, common method of trying fallacious	156
Statera, or Roman ſteelyard	12
Staves and cogs to ſet out	33
Suction by machines	166
diſproved	116
Syphon	157
electrified	78

T

Table for mill-wrights	37
of the rarety of the air	100
of refracting teleſcopes	258

Table

Page
Table of the apertures, &c. of Newtonian reflecting teleſcopes 264
remarks on them 265
of the dimenſions of Mr. Short's teleſcopes 266
Tantalus' cup 159
Teleſcopes 244
refracting 250
binocular, or double 256
reflecting 259
dimenſions of one of Mr. Short's 261
Mr. Herſchell's 265
ſolar 270
acromatic 271
Terms technical of electricity 93
Thunder-houſe, a deſcription of 56
and lightning 107
Tooth-ach, an inſtrument to cure 80
Torricellian experiment 130
Trade winds accounted for 104
Tube ſpiral 63

U

Univerſe deſcribed poetically 317

V

Varniſh for inſulated apparatus 97
Venus, the planet 298
Velocity of ſpouting water 165
water to compute 30
Viſion how effected 194

W

Water, the velocity of, to compute 30
ſpouting, the velocity of 165
the horizontal diſtance to which it ſpouts ib.
Sieur Vera's engine for raiſing of 181
Weather, rules to judge of the 131
Dr. Halley's rules and obſervations on the 133
Wedge, of the 21
Wheel and axle 15
uſe of the ib.
how the power may be increaſed 16
caution in the uſe of 17
the diameters of to proportion 283
Wind, the cauſe of 103
Wood, light, how made to ſink in water 164
Word luminous 72

Page

Table of the aperture, &c. of Newtonian reflecting telescopes 264
remarks on them 265
of the dimentions of Mr. Short's telescopes 266
Tantalus' cup 150
Telescopes 244
refracting 250
binocular, or double 256
reflecting
dimentions of
of Mr. Short
Mr. Herschel
solar
aromatic
Terms technical of electricity 93
Thunder-house, a description of 16
and lightning 107
Tooth-ach, an infallible cure to cure 80
Torricellian experiment 150
Trade winds accounted for 103
Tube spiral 63

U

Universe delineated poetically 317

V

Varnish for insulated apparatus 97
Venus the planet 208
Velocity of jetting water 165
water to compute 300
When elected 194

W

Water, the velocity of, to compute 30
jetting, the velocity of 165
the horizontal distance to which it jets ib.
Sieur Vam'sengine for raising of 181
Weather, rules to judge of the 131
Dr. Hadley's rules and observations on the 133
Wedge, of the 21
Wheel and axle 15
use of the ib.
how the power may be 16
caution in the use of 17
the diameters of to proportion 283
Wind, the cause of 103
Wood, to bend, how made to 164
Wood in water 72
Wood in ointment

MECHANICS.

DEFINITIONS.

1. MECHANICS is a ſcience which treats of the forces, motions, velocities, and in general, of the actions of bodies upon one another; it teaches how to move any given weight with any given power; how to contrive engines to raiſe great weights, or to perform any kind of motion.

2. Body, is the maſs or quantity of matter: an elaſtic body is that which yields to a ſtroke, and recovers its figure again; otherwiſe, it is called an unelaſtic body.

3. Denſity, is the proportion of the quantity of matter in any body to the quantity of matter in another body of the ſame dimenſions.

4. Force, is a power exerted on a body to move it; if it act inſtantaneouſly, it is called percuſſion, or impulſe; if conſtantly, it is an accelerative force.

5. Velocity, is a property of motion, by which a body paſſes over a certain ſpace in a certain time; and is

greater or leſs, as it paſſes over a greater or leſs ſpace in a certain time: ſuppoſe a ſecond.

6. Motion, is a continual and ſucceſſive change of place. If the body moves equally, it is called equable or uniform motion; if it increaſes or decreaſes, it is called accelerated or retarded motion; when it is compared with a body at reſt, it is called abſolute motion; but when compared with a body in motion, it is called relative motion.

7. Direction of motion, is the courſe or way the body tends, or the line it moves in.

8. Quantity of motion, is the motion a body has, conſidered both in regard to its velocity and quantity of matter. This is called the momentum of a body.

9. Vis inertiæ, is the innate force of matter, by which it reſiſts any change, ſtriving to preſerve its preſent ſtate of reſt or motion.

10. Gravity, is that force wherewith a body endeavours to fall downwards; it is called abſolute gravity in empty ſpace; and relative gravity when immerſed in a fluid.

11. Specific Gravity, is the greater or leſs weight of bodies of the ſame magnitude, or the proportion between their weights. This proceeds from the natural denſity of bodies.

12. Center of gravity, is a certain point of a body upon which the body, when ſuſpended, will reſt in any poſition.

BRITISH MUSEUM 15 61 NOV

13. Center

13. Center of motion, is a fixed point, round about which a body moves; and the axis of motion is a fixed line it moves about.

14. Power and weight, when oppoſed to one another, ſignify the body that moves another, and the other which is moved; the body which begins and communicates motion is the power; and that which receives the motion is the weight.

15. Equilibrium, is the balance of two or more forces, ſo as to remain at reſt.

16. Machine or engine, is any inſtrument to move bodies; made of levers, wheels, pullies, &c.

17. Mechanic powers, are the lever, wheel, pulley, ſcrew, wedge, and the inclined plane.

18. Streſs, is the effect any force has to break a beam, or any other body; and the ſtrength is the reſiſtance it is able to make againſt any ſtraining force.

19. Friction, is the reſiſtance which a machine ſuffers, by the parts rubbing againſt one another.

POSTULATA.

1. That a ſmall part of the ſurface of the earth may be looked upon as a plane; for though the earth be round, yet ſuch a ſmall part of it as we have any occaſion to conſider, does not ſenſibly differ from a plane.

2. That heavy bodies deſcend in lines parallel to one another; for though they all tend to a point, which is the center of the earth, yet that center is at ſuch a diſtance, that theſe lines differ inſenſibly from parallel lines.

3. The ſame body is the ſame weight in all places on or near the earth's ſurface; for the difference is not ſenſible in the ſeveral places we can go to.

4. Though all matter is rough, and all engines imperfect; yet, for the eaſe of calculation, we muſt ſuppoſe all planes perfectly even; all bodies perfectly ſmooth; and all bodies and machines to move without friction or reſiſtance; all lines ſtraight and inflexible, without weight or thickneſs; cords extremely pliable, and ſo on.

AXIOMS.

1. Every body endeavours to remain in its preſent ſtate, whether it be at reſt, or moving uniformly in a right line.

2. The alteration of motion by any external force, is always proportionable to that force, and in direction of the right line in which the force acts.

3. Action and re-action between any two bodies, are equal and contrary.

4. The motion of any body is made up of the ſum of the motions of all the parts.

5. The

5. The weights of all bodies in the ſame place, are proportional to the quantities of matter they contain, without any regard to their figure.

6. The vis inertiæ of any body, is proportional to the quantity of matter.

7. Every body will deſcend to the loweſt place it can get to.

8. Whatever ſuſtains a heavy body, bears all the weight of it.

9. Two equal forces acting againſt one another in contrary directions, deſtroy one another's effect; and unequal forces act only with the difference of them.

10. When a body is kept in equilibrium, the contrary force in any line of direction is equal.

11. If a certain force generate any motion, an equal force acting in a contrary direction, will deſtroy as much motion in the ſame time.

12. If a body be acted on by any power in a given direction, it is all one in what point of that line of direction the power is applied.

13. If a body is drawn by a rope, all the parts of the rope are equally ſtretched; and the force in any part acts in direction of that part; and it is the ſame thing whether the rope is drawn out at length, or goes over ſeveral pullies.

14. If ſeveral forces at one end of a lever act againſt ſeveral forces at the other end, the lever acts, and is acted on, in direction of its length.

Of the Mechanical Powers.

The foundation of all mechanics.

NOW, if we conſider bodies in motion, and compare them together, we may do this either with reſpect to the quantities of matter they contain, or the velocities with which they are moved; for the heavier any body is, the greater is the power required either to move or ſtop its motion: and again, the ſwifter it moves, the greater is its force: ſo that the whole force of a moving body is the reſult of its quantity of matter multiplied by the velocity with which it is moved: and when the product ariſing from the multiplication of the particular quantities of matter in any two bodies, by their reſpective velocities, are equal, the entire forces are ſo too. Thus, ſuppoſe a body, which we call A, to weigh 40 pounds, and to move at the rate of two miles in a minute; and another body, which we call B, to weigh only 4 pounds, and to move 20 miles in a minute; the entire forces with which theſe two bodies would ſtrike againſt any obſtacle would be equal to each other, and therefore it would require equal powers to ſtop them: for 40 multiplied by 2 gives 80, the force of the body A; and 20 multiplied by 4 gives 80, the force of the body B. Upon this eaſy principle depends the whole of mechanics: and it holds univerſally true, that when two bodies are ſuſpended on any machine, ſo as to act contrary to each other; if the machine be put

put into motion, and the perpendicular aſcent of one body multiplied into its weight, be equal to the perpendicular deſcent of the other body multiplied into its weight, thoſe bodies, how unequal ſoever in their weights, will balance one another in all ſituations: for, as the whole aſcent of one is performed in the ſame time with the whole deſcent of the other, their reſpective velocities muſt be directly as the ſpaces they move through; and the exceſs of weight in one body is compenſated by the exceſs of velocity in the other. Upon this principle, it is eaſy to compute the power of any mechanical engine, whether ſimple or compound; for it is but only finding how much ſwifter the power moves than the weight does (*i. e.* how much farther in the ſame time); and juſt ſo much is the power increaſed by the help of the engine.

How to compute the power of any mechanical engine.

In the theory of this ſcience we ſuppoſe all planes perfectly even, all bodies perfectly ſmooth, levers to have no weight, cords to be extremely pliable, machines to have no friction; and, in ſhort, all imperfections muſt be ſet aſide until the theory be eſtabliſhed; and then, proper allowances are to be made.

The ſimple machines, uſually called mechanical powers, are ſix in number, viz. the lever, the wheel and axle, the pulley, the inclined plane, the wedge, and the ſcrew. They are called mechanical powers, becauſe they help us mechanically to raiſe weights, move heavy bodies, and overcome reſiſtances, which we could not effect without them.

The mechanic powers what.

1. A lever is a bar of iron or wood, one part of which being ſupported by a prop, all the other parts turn upon that prop as their center of motion: and the velocity of every

Of the lever

every part or point is directly as its distance from the prop. Therefore, when the weight to be raised at one end is to the power applied to the other to raise it; as the distance of the power from the prop is to the distance of the weight from the prop, the power and weight will exactly balance or counterpoise each other: and as a common lever has nearly no friction on its prop, a very little additional power will be sufficient to raise the weight.

There are four kinds of levers. 1. The common sort, when the prop is placed between the weight and power; but much nearer to the weight than to the power. 2. When the prop is at one end of the lever, the power at the other, and the weight between them. 3. When the prop is at one end, the weight at the other, and the power applied between them. 4. The bended lever, which differs only in form from the first sort, but not in property. Those of the first and second kind are often used in mechanical engines; but there are few instances in which the third sort is used.

The balance.

The balance is a straight inflexible rod or beam, turning round a fixed point or axle in the middle of it, to be loaded at each end with weights suspended there: it is by some reckoned a lever of the first kind; but as both ends are set at equal distances from its center of motion, they move with equal velocities; and therefore, as it gives no mechanical advantage, it cannot properly be reckoned among the mechanical powers.

Plate I. Fig. 5.

Let C D be a beam or lever, E the middle point or center of motion; A B the weights, hanging at the ends C D; then let the beam and the weights, or the whole machine,

machine, be ſuſpended at E; and ſuppoſe the beam and the weights be turned upon the center E, then the points C D being equidiſtant from E, will deſcribe equal arches, and therefore their velocities will be equal; and if the bodies A and B be equal, then the motion of A will be equal to the motion of B, as the quantities of matter and velocities are equal; and conſequently, if the beam and weights are ſet at reſt, neither of them can move the other, but they will remain in equilibrium. If one weight be greater than the other, that weight and ſcale will deſcend and raiſe the other.

Now, the uſe of the balance, or a common pair of ſcales, is to compare the weights of different bodies; for any body, whoſe weight is required, put into one ſcale, and balanced by known weights put into the other ſcale, theſe weights will ſhew the weight of the body.

The Properties of Scales.

To have a pair of ſcales perfect, they muſt have theſe properties: 1. The points of ſuſpenſion of the ſales, and the center of motion of the beam C, E, D, muſt be in a right line. 2. The arms C E, D E, muſt be of equal length from the center. 3. That the center of gravity be in the center of the motion E. 4. That there be as little friction as poſſible. 5. That they be in equilibrium when empty.

If the center of gravity of the beam be above the center of motion, and the ſcales be in equilibrium; if they be put a little out of that poſition, by putting down one end of the beam, that end will continually deſcend until it be ſtopt at the handle H; for by that motion, the center of gravity is continually deſcending, according to the nature of it; but if the center of

gravity of the beam be below the center of motion; if one end of the beam be put down a little, to deſtroy the equilibrium, it will return back and vibrate up and down; for by the motion the center of gravity is endeavouring to deſcend.

To prove Scales whether they are good.

To diſcover a falſe balance, make the weights in the two ſcales to be in equilibrium; then change the weights to the contrary ſcales, and if they be not in equilibrium, the balance is falſe.

Hence alſo to prove a pair of good ſcales, they muſt be in equilibrium when empty, and likewiſe in equilibrium with the two weights. Then, if the two weights be changed to the contrary ſcales, the equilibrium will ſtill remain, if the ſcales are good.

Fig. 1. The firſt kind of lever.

A lever of the firſt kind is repreſented by the bar A B C, ſupported by the prop D. Its principal uſe is to looſen large ſtones in the ground, or to raiſe great weights to ſmall heights, in order to have ropes put under them for raiſing them higher by other machines. The parts A B and B C on different ſides of the prop D, are called the arms of the lever: the end A of the ſhorter arm A B being applied to the weight intended to be raiſed, or to the reſiſtance to be overcome; and the power applied to the end C of the longer arm B C.

In making experiments with this machine, the ſhorter arm A C muſt be as much thicker than the longer arm B B, as will be ſufficient to balance it on the prop D. This ſuppoſed, let P repreſent a power whoſe gravity is equal to 1 ounce, and W a weight, whoſe gravity is equal

equal to 12 ounces. Now if the power be twelve times as far from the prop as the weight is, they will exactly counterpoiſe; and a ſmall addition to the power P will cauſe it to deſcend, and raiſe the weight W; and the velocity with which the power deſcends will be to the velocity with which the weight riſes, as 12 to 1; that is, directly as their diſtances from the prop, and, conſequently, as the ſpaces through which they move. Hence it is plain, that a man who, by his natural ſtrength, without the help of any machine, could ſupport an hundred weight, will by the help of this lever be enabled to ſupport twelve hundred. If the weight be leſs, or the power greater, the prop may be placed ſo much farther from the weight; and then it can be raiſed to a proportionable greater height. For, univerſally, if the intenſity of the weight multiplied into its diſtance from the prop, be equal to the intenſity of the power multiplied into its diſtance from the prop, the power and weight will exactly balance each other; and a little addition to the power will raiſe the weight. Thus, in the preſent inſtance, the weight W is 12 ounces, and its diſtance from the prop is 1 inch; and 12 multiplied by 1 is 12; the power P is equal to 1 ounce, and its diſtance from the prop is 12 inches, which multiplied by 1 is 12 again; and therefore there is an equilibrium between them. So, if a power equal to 2 ounces be applied at the diſtance of 6 inches from the prop, it will juſt balance the weight W; for 6 multiplied by 2 is 12, as before; and a power equal to 3 ounces placed at 4 inches diſtant from the prop would be the ſame; for 3 times 4 is 12; and ſo on, in proportion. To this kind of lever may be reduced ſeveral ſorts of inſtruments, ſuch as ſciſſars, pincers, ſnuffers, &c. which are made of two levers acting contrary to one another: their prop or center of motion being the pin which keeps

Fig. 1.

Properties of the firſt kind of lever.

them together. In common practice, the longer end of this lever greatly exceeds the weight of the ſhorter: which gains great advantage, becauſe it adds ſo much to the power.

Fig. 1. The ſteelyard.

The ſtatera, or Roman ſteelyard, is a lever of this kind, and is uſed for finding the weights of different bodies by one ſingle weight placed at different diſtances from the prop or center of motion D. For, if a weight hangs at A, the extremity of the ſhorter arm D G is of ſuch a weight as will exactly counterpoiſe the longer arm D X; if this arm be divided into as many equal parts as it will contain, each equal to O D, the ſingle weight P (which we may ſuppoſe to be 1 pound) will ſerve for weighing any thing as heavy as itſelf, or as many times heavier as there are diviſions in the arm D X, or any quantity between its own weight and that quantity. As for example: If P be 1 pound, and placed at the firſt diviſion 1 in the arm D X, it will balance 1 pound in the ſcale at W; if it be removed to the ſecond diviſion at 2, it will balance 2 pounds in the ſcale; if to the third, 3 pounds; and ſo on to the end of the arm D X. If each of theſe integral diviſions be ſubdivided into as many equal parts as a pound contains ounces, and the weight P be placed at any of theſe ſubdiviſions, ſo as to counterpoiſe what is in the ſcale, the pounds and odd ounces therein will by that means be aſcertained.

Fig. 2.

A lever of the ſecond kind has the weight between the prop and the power. In this, as well as the former, the advantage gained is as the diſtance of the power from the prop to the diſtance of the weight from the prop: for the reſpective velocities of the power and weights are in that proportion; and they will balance each

each other when the intenſity of the power, multiplied by its diſtance from the prop, is equal to the intenſity of the weight multiplied by its diſtance from the prop. Thus, if A B be a lever on which the weight W of 6 ounces hangs at the diſtance of 1 inch from the prop G, and a power P, equal to the weight of 1 ounce, hangs at the end B, 6 inches from the prop; by the cord C D going over the fixed pulley E, the power will juſt ſupport the weight: and a ſmall addition to the power will raiſe the weight 1 inch for every 6 inches that the power deſcends. This lever ſhews the reaſon why two men carrying a burden upon a ſtick between them, bear unequal ſhares of the burden in the inverſe proportion of their diſtances from it. For it is well known, that the nearer either of them is to the burden, the greater ſhare he bears of it: and if he goes directly under it, he bears the whole. So if one man be at G, and the other at B, having the pole or ſtick A B reſting on their ſhoulders; if the burden or weight W be placed five times as near the man at G as it is to the man at B, the former will bear five times as much weight as the latter.

Properties of the ſecond kind of lever.

This is likewiſe applicable to the caſe of two horſes of unequal ſtrength to be ſo yoked, as that each horſe may draw a part proportionable to his ſtrength; which is done by ſo dividing the beam they pull, that the point of traction may be as much nearer to the ſtronger horſe than to the weaker, as the ſtrength of the former exceeds that of the latter.

To this kind of lever may be reduced oars, rudders of ſhips, doors turning upon hinges, cutting-knives which are fixed at the point, &c.

The third kind of lever.

If in this lever we ſuppoſe the power and weight to change

change places, ſo that the power may be between the weight and the prop, it will become a lever of the third kind; in which, that there may be a balance between the power and the weight, the intenſity of the power muſt exceed the intenſity of the weight juſt as much as the diſtance of the weight from the prop exceeds the diſtance of the power. Thus, let E be the prop of the lever A B, and W a weight of 1 pound, placed 3 times as far from the prop as the power P acts at F, by the cord C going over the fixed pulley D: in this caſe, the power muſt be equal to 3 pounds, in order to ſupport the weight of 1 pound.

Fig. 3.

Properties of the third kind of lever.

To this ſort of lever are generally referred the bones of a man's arm; for when he lifts a weight by the hand, the muſcle that exerts its force to raiſe that weight, is fixed to the bone about one tenth part as far below the elbow as the hand is. And the elbow being the center round which the lower part of the arm turns, the muſcle muſt therefore exert a force ten times as great as the weight that is raiſed.

As this kind of lever is a diſadvantage to the moving power, it is uſed as little as poſſible; but in ſome caſes it cannot be avoided; ſuch as that of a ladder, which, being fixed at one end, is by the ſtrength of a man's arms reared againſt a wall.

And in clock-work, where all the wheels may be reckoned levers of this kind, becauſe the power that moves every wheel, except the firſt, acts upon it near the center of motion by means of a ſmall pinion; and the reſiſtance it has to overcome, acts againſt the teeth round its circumference.

The fourth kind of lever.
Fig. 4.

The fourth kind of lever differs nothing from the firſt but in being bended for the ſake of convenience. A C B

is

is a lever of this ſort, bended at C, which is its prop or center of motion. P is a power acting upon the longer arm A C at F, by the means of the cord D E going over the pulley G; and W is a weight or reſiſtance acting upon the end B of the ſhorter arm C B. If the power is to the weight as C B is to C F, they are in equilibrium. Thus: Suppoſe W to be 5 pounds acting at the diſtance of one foot from the center of motion C, and P to be 1 pound acting at F, five feet from the center C, the power and weight will juſt balance each other. A hammer drawing a nail is a lever of this ſort.

2. The ſecond mechanical power is the wheel and axle, in which the power is applied to the circumference of the wheel, and the weight is raiſed by a rope which coils about the axle as the wheel is turned round. Here it is plain, that the velocity of the power muſt be to the velocity of the weight as the circumference of the wheel is to the circumference of the axle: and conſequently, the power and weight will balance each other, when the intenſity of the power is to the intenſity of the weight as the circumference of the axle is to the circumference of the wheel. Let A B be a wheel, C D its axle, and ſuppoſe the circumference of the wheel to be 8 times as great as the circumference of the axle; then, a power P equal to 1 pound, hanging by the cord I, which goes round the wheel, will balance a weight W of 8 pounds hanging by the rope K, which goes round the axle. And as the friction on the pivots or gudgeons of the axle E F is but ſmall, a ſmall addition to the power will cauſe it to deſcend, and raiſe the weight; but the weight will riſe with only an eighth part of the velocity wherewith the power deſcends, and conſequently, through no more than one eighth part of an equal ſpace in the ſame time. If the wheel be pulled round by the handles S, S, the

The wheel and axle.

Fig. 7.

Fig. 7.

the power will be increaſed in proportion to their length. And by this means, any weight may be raiſed as high as the operator pleaſes.

Its uſes. To this ſort of engine belong all cranes for raiſing great weights; and in this caſe, the wheel may have cogs all round it inſtead of handles, and a ſmall lanthorn or trundle may be made to work in the cogs, and be turned by a winch; which will make the power of the engine to exceed the power of the man who works it, as much as the number of revolutions of the winch exceeds thoſe of the axle C D, when multiplied by the exceſs of the length of the winch above the length of the ſemidiameter of the axle, added to the ſemidiameter or half thickneſs of the rope K, by which the weight is drawn up. Thus: Suppoſe the diameter of the rope and axle taken together, to be 13 inches, and conſequently, half their diameter to be 6 ½ inches; ſo that the weight W will hang at 6 ½ inches perpendicular diſtance from below the center of the axle. Now, let us ſuppoſe the wheel A B, which is fixed on the axle, to have 80 cogs, and to be turned by means of a winch 6 ½ inches long, fixed on the axle of a trundle of eight ſtaves or rounds, working in the cogs of the wheel; here it is plain, that the winch and trundle would make 10 revolutions for one of the wheel A B, and its axis D, on which the rope K winds in raiſing the weight W; and the winch being no longer than the ſum of the ſemidiameters of the great axle and rope, the trundle could have no more power on the wheel than a man could have by pulling it round by the edge, becauſe the winch would have no greater velocity than the edge of the wheel has, which we here ſuppoſe to be ten times as great as the velocity of the riſing weight; ſo that, in this caſe, the power gained would be

How power may be increaſed.

as

is 10 to 1. But if the length of the winch be 13 inches, the power gained will be as 20 to 1: if 19½ inches (which is long enough for any man to work by) the power gained will be as 30 to 1; that is, a man could raiſe 30 times as much by ſuch an engine as he could do by his natural ſtrength without it, becauſe the velocity of the handle of the winch would be 30 times as great as the velocity of the riſing weight; the abſolute force of any engine being in proportion of the velocity of the power, to the velocity of the weight raiſed by it. But then, juſt as much power or advantage as is gained by the engine, ſo much time is loſt in working it; which is common in all mechanical caſes whatever.

Force of any engine.

In this ſort of machines it is requiſite to have a ratchet-wheel on the end of the axle C, with a catch to fall into its teeth; which will at any time ſupport the weight, and keep it from deſcending, if the perſon who turns the handle ſhould, through inadvertency or careleſſneſs, quit his hold while the weight is raiſing. Thus, by this means, the danger is prevented which might otherwiſe happen by the running down of the weight when left at liberty.

Caution.

The third mechanical power or engine conſiſts either of one moveable pulley, or a ſyſtem of pullies; ſome in a block or caſe which is fixed, and others in a block which is moveable, and riſes with the weight. For though a ſingle pulley that only turns on its axis, and moves not out of its place, may ſerve to change the direction of the power, yet it can give no mechanical advantage thereto; but is only as the beam of a balance, whoſe arms are of equal length and weight. Thus, A is a ſingle pul-

The pulley, Fig. 8.

ley, and if it ſupport the equal weights P and W, the cord B B to which they are appended, is equally ſtretched throughout, and the pulley A ſuſtains both the weights, or is drawn with a force equal to twice P. It is properly but another form of the balance.

Fig. 9: Three moveable pullies.

A combination of three moveable pullies A, B, C, connected by three diſtinct cords, each faſtened at one end to an immoveable block above. The power of the whole is diſcovered by ſuppoſing two ſuch weights, P and W, ſuſpended as will keep the machine in equilibrium, and then beginning with the leaſt weight or power P, and conſidering what force each ſeparate pulley ſuſtains. Thus, if P be one pound, the cord which ſuſtains it acts at its other end upon the fixed block above, and is conſequently re-acted upon by a force equal to one pound; and the pulley A, as in Fig. 8, is drawn with a force equal to two pounds.

By tracing the ſecond cord in the ſame manner, it will appear that the pulley B is drawn with twice the force of A, or four pounds; and C is drawn with twice the force of B, or 8 pounds. So that the purchaſe of this machine is ſuch, that the weight W has 8 times the power of P.

Velocity and power as 8 to 1.

The velocity of the weight to that of the power is (in a ſimilar way of arguing) thus: if P deſcend 8 inches, A will aſcend 4; B, 2; and C, or W, 1 inch; ſo that the velocities are reciprocally as the power and weight.

Fig. 10.

Another combination of pullies, whereof two, A and B, run in the fixed block X; and two others, C and D, in a moveable block, which raiſe the weight W, by pulling

ling the cord at P, which goes ſucceſſively over the pullies A, D, B, C, and is faſtened to the fixed blocks. The purchaſe of this machine is known by conſidering that the cord is equally ſtretched throughout, by putting two ſuch weights, P and W, as will counterpoiſe each other: for P is ſuſtained by the ſingle cord, and W by four folds of the ſame, viz. by the parts o, s, u, k; ſo that if P be one pound, W will be four pounds. Four moveable pullies.

The velocity of the power is to that of the weight as four to one: for if P deſcend four inches, the parts of the cord at k will aſcend towards e four inches, and all the other parts of the cord, from the pulley C, will equally follow each other, and C or W will aſcend one inch towards s; or the four parts of the cord o, s, u, k, will each be ſhortened one inch. Velocity as 4 to 1.

In like manner may the purchaſe of any other combination of pullies be determined: and it will always happen, that the *momenta* of the weight and power will be equal, as in the other mechanical powers. That is, if any power will raiſe one pound with a certain velocity, it will raiſe two pounds with half that velocity, or one hundred pounds with one hundredth part of that velocity, &c.

But as a ſyſtem of pullies has no great weight, and lies in a ſmall compaſs, it is eaſily carried about; and can be applied, in a great many caſes, for raiſing weights, where other engines cannot; but they have a great deal of friction, on three accounts—1. Becauſe the diameters of their axis bear a very conſiderable proportion to their own diameters. 2. Becauſe in working, they are apt to rub againſt one another, or againſt the ſides of the blocks.

3. Becauſe of the ſtiffneſs of the ropes that paſs over and under them.

The inclined plane.

The fourth mechanical power is the inclined plane; and the advantage gained by it is as great as its length exceeds its perpendicular height. Let A B be a plane parallel to the horizon, and C D a plane inclined to it; and ſuppoſe the whole length C D to be three times as great as the perpendicular height G f F. In this caſe the cylinder E will be ſupported upon the plane C D, and kept from rolling down upon it, by a power equal to a third part of the weight of the cylinder. Therefore, a weight may be rolled up this inclined plane with a third part of the power which would be ſufficient to draw it up by the ſide of an upright wall. If the plane was four times as long as it is high, a fourth part of the power would be ſufficient; and ſo on in proportion. Suppoſe a man has occaſion to ſet a weight upon an eminence, and the weight is ſo great that he cannot lift it by his natural ſtrength, he will take a long ſtout plank, or ſomething equivalent thereto, and ſetting it ſloping, will puſh the weight before him up the plank, to the place deſigned to ſet it in; and ſuch plank, or other contrivance like it, is an inclined plane. Now it is evident, that the ſhorter this inclined plane is, the ſteeper is the aſcent; and the longer the plane is, the aſcent muſt be the eaſier. Iti s plain alſo, that it is much eaſier to puſh a rolling weight up a hill that riſes gently, than up a hill which is very ſteep; which is univerſally known.

Fig. 11.

The force wherewith a rolling body deſcends upon an inclined plane, is to the force of its abſolute gravity, by which it would deſcend perpendicularly in a free ſpace, as the height of the plane is to its length. For, ſuppoſe the plane A B to be parallel to the horizon, the cylinder will

Fig. 12.

will keep at reſt on any part of a plane where it is laid. Fig. 13. If the plane be ſo elevated, that its perpendicular height from D is equal to half its length A B, the cylinder C will roll down upon the plane with a force equal to half its weight; for it would require a power (acting in the direction of A B) equal to half its weight to keep it from rolling. If the plane D B be elevated, ſo as to be perpendicular to the horizon, the cylinder C would deſcend with its whole force of gravity, becauſe the plane contributes nothing to its ſupport or hindrance; and therefore it would require a power equal to its whole weight to keep it from deſcending. To the inclined plane may be reduced all hatchets, chiſels, and other edge tools, which are chamfered only on one ſide. Fig. 14.

The fifth mechanical power or machine is the wedge; which may be conſidered as two equally inclined planes, D E F and C E F, joined together at their baſes e E F O: — then D C is the whole thickneſs of the wedge at its back A B C D, where the power is applied; E F is the depth or heighth of the wedge; D F, the length of one of its ſides, equal to C F, the length of the other ſide; and O F is its ſharp edge, which is entered into the wood intended to be ſplit, by the force of a hammer or mallet ſtriking perpendicularly on its back. Thus, A B is a wedge driven into the cleft C E D of the wood F G. The wedge, Fig. 15. Fig. 16.

When the wood does not cleave at any diſtance before the wedge, there will be an equilibrium between the power impelling the wedge downward and the reſiſtance of the wood acting againſt the two ſides of the wedge; when the power is to the reſiſtance as half the thickneſs of the wedge at its back is to the length of either of its ſides; becauſe the reſiſtance then acts perpendicular to the

the ſides of the wedge. But, when the reſiſtance on each ſide acts parallel to the back, the power that balances the reſiſtances on both ſides will be as the length of the whole back of the wedge is to double its perpendicular height.

When the wood cleaves at any diſtance before the wedge (as it generally does) the power impelling the wedge will not be to the reſiſtance of the wood as the length on the back of the wedge is to the length of both its ſides; but as half the length of the back is to the length of either ſide of the cleft, eſtimated from the top or acting part of the wedge. For, if we ſuppoſe the wedge to be lengthened down from the top C D, to the bottom of the cleft at E, the ſame proportion will hold; namely, that the power will be to the reſiſtance as half the length of the back of the wedge is to the length of either of its ſides: or, which amounts to the ſame thing, as the whole length of the back is to the length of both the ſides.

The wedge is a very great mechanical power, ſince not only wood but even rocks can be ſplit by it: which would be impoſſible to effect by the lever, wheel and axle, or pulley: for the force of the blow, or ſtroke, ſhakes the cohering parts, and thereby makes them ſeparate more eaſily.

The ſcrew. The ſixth and laſt mechanical power is the ſcrew; which cannot properly be called a ſimple machine, becauſe it is never uſed without the application of a lever or winch to aſſiſt in turning it; and then it becomes a compound engine of a very great force, either in preſſing the parts of bodies cloſer together, or in raiſing great weights. It may be conceived to be made by cutting a Fig. 17. piece of paper, A B C, into the form of an inclined plane

or

or half wedge, and then wrapping it round a cylinder (Fig. 18.) it being evident that the winch muſt turn the cylinder once round, before the weight of reſiſtance can be moved from one ſpiral winding to another, as from d to c: therefore, as much as the circumference of a circle deſcribed by the handle of the winch is greater than the interval or diſtance between the ſpirals, ſo much is the force of the ſcrew. Thus, ſuppoſing the diſtance of the ſpirals to be half an inch, and the length of the winch twelve inches, the circle deſcribed by the handle of the winch where the power acts, will be 76 inches nearly, or about 152 half inches; and conſequently 152 times as great as the diſtance between the ſpirals: and therefore a power at the handle, whoſe intenſity is equal to no more than a ſingle pound, will balance 152 pounds acting againſt the ſcrew; and as much additional force as is ſufficient to overcome the friction, will raiſe the 152 pounds; and the velocity of the power will be to the velocity of the weight as 152 to 1. Hence it appears, that the longer the winch is, and the nearer the ſpirals are to one another, ſo much the greater is the force of the ſcrew. Fig. 18.

A machine for ſhewing the force or power of the ſcrew may be contrived in the following manner:—Let the wheel C have a ſcrew a b on its axis, working in the teeth of the wheel D, which ſuppoſe to be 48 in number. It is plain, that for every time the wheel C and ſcrew a b are turned round by the winch A, the wheel D will be moved one tooth by the ſcrew; and therefore, in 48 revolutions of the winch, the wheel D will be turned once round. Then, if the circumference of a circle, deſcribed by the handle of the winch A, be equal to the circumference of a groove c round the wheel D, the velocity of the handle will be 48 times as great Fig. 19.

as

as the velocity of any given point in the groove. Conſequently, if a line G goes round the grove e, and has a weight of 48 pounds hung to it below the pedeſtal E F, a power equal to 1 pound at the handle will balance and ſupport the weight. To prove this by experiment, let the circumferences of the grooves of the wheels C and D be equal to one another; and then if a weight H, of one pound, be ſuſpended by a line going round the groove of the wheel C, it will balance a weight of 48 pounds hanging by the line G; and a ſmall addition to the weight H will cauſe it to deſcend, and ſo raiſe up the other weight.

Experiment

If a line G, inſtead of going round the groove e of the wheel D, goes round its axle I, the power of the machine will be as much increaſed as the circumference of the groove e exceeds the circumference of the axle: which ſuppoſing it to be ſix times, then 1 pound at H will balance 6 times 48, or 288 pounds, hung to the line on the axle: and hence the power or advantage of this machine will be as 288 to 1. That is to ſay, a man, who by his natural ſtrength could lift an hundred weight, will be able to raiſe 288 by this engine. If a ſyſtem of pullies were applied to the cord H, the power would be increaſed to an amazing exceſs; but it would be here as in all other mechanical caſes; for the time loſt is always as much as the power gained, becauſe the velocity with which the power moves, will ever exceed the velocity with which the weight riſes, as much as the intenſity of the weight exceeds the intenſity of the power.

Friction.

The friction of the ſcrew is very conſiderable; and there are few compound engines but what, on account of the friction of the parts againſt one another, will require a third part more of the power to work them when loaded, than

than what is ſufficient to conſtitute a balance between the weight and the power.

In the lever, the friction is nothing. In the wheel and axle, it is as ſmall as the diameter of the gudgeons (added to the power required to bend the rope) is leſs than the diameter of the wheel; but it increaſes according to the weight with which the axle is charged. The like might be ſaid of the pullies, if they did not rub againſt one another, or againſt the ſides of the mortiſes in the block where they are placed. A new rope of 1 inch diameter going over a pulley 3 inches diameter, and pulled with a force equal to 5 pounds, requires a force of 1 pound or upwards to bend it; and a rope 2 inches diameter requires 4 times as much force.

Wood greaſed, or metal oiled, have nearly the ſame friction; and the ſmoother they are, their friction is the leſs. Yet metals may be ſo highly poliſhed, as to have their friction increaſed by the coheſion of their parts.

Wood ſlides eaſier upon the ground in wet weather than in dry; and eaſier than an equal weight of iron in dry weather: but iron ſlides eaſier than wood in wet weather. Iron or ſteel running in braſs, has the leaſt friction of any. Lead makes a great deal of reſiſtance. In wood, acting upon wood, greaſe makes the motion at leaſt twice as eaſy. Wheel-naves, greaſed or tarred, go four times as eaſy as when wet. Smooth ſoft wood, moving upon ſmooth ſoft wood, has a friction equal to about a third part of the weight. In rough wood, the friction is almoſt equal to half the weight. In ſoft

wood upon hard, or hard upon ſoft, the friction is equal to about a fifth part of the weight.

In poliſhed ſteel, moving upon poliſhed ſteel or pewter, the friction is about a fourth part of the weight; on copper, a fifth part; and on braſs, a ſixth part of the weight. Metals of the ſame ſort have more friction than different ſorts.

In general, the friction increaſes in the ſame proportion with the weight. The friction is alſo greater with a greater velocity; but not ſo great in proportion as the increaſe of velocity.

To have the friction of machines as little as poſſible, they ought to be made of the feweſt and ſimpleſt parts. The diameters of the wheels and pullies ought to be large, and the gudgeons of the axles as ſmall as can be conſiſtent with the required ſtrength. The ſides of the pullies ought not to be all over flat, but to have a ſmall riſing in the middle, to keep them from rubbing againſt each other's ſides, and againſt the ſides of their mortiſes at a diſtance from their axle. All the cords and ropes ought to be as pliant as poſſible; and, for that end, rubbed with greaſe. The teeth of the wheels ſhould juſt fit and fill the openings, ſo as not to be ſqueezed nor ſhaken therein. All the parts which work into, or upon one another, ought to be ſmooth; the gudgeons ought juſt to fit their holes, and the working parts muſt be greaſed. The rounds or ſtaves of the trundles may be made to turn about upon iron ſpindles, fixed in the round end-boards; which will take off a great deal of friction.

Let

Let the ſtrength of all parts be in proportion to the ſtreſs they are to bear, ſo as they may laſt equally well. He is by no means a perfect mechanic who only adjuſts the ſtrength to the ſtreſs, if he does not contrive all the parts to laſt ſo, as that one ſhall not fail before another.


When any motion is to be long continued, contrive the machine ſo, as that the working power may always move to act one way, if it can be done: for this is better and eaſier performed than when the motion is interrupted by the power's being forced to move firſt one way and then another; becauſe every new change of motion requires a new additional force to effect it; and a body in motion cannot ſuddenly receive a contrary motion without great violence, and danger of tearing the machine to pieces. But when the nature of the thing requires that a motion ſhould ſuddenly be communicated to a body, or ſuddenly ſtopt, let the force act againſt ſome ſpring, to prevent the machine's being damaged by a ſudden jolt.

When a machine is moved by two handles, or winches on the ends of an axle, the handles are ſo placed as that when the one is up, the other is down; which is the worſt way poſſible of placing them, ſave that of their being both up or down together. For, when a man raiſes a weight by means of turning a winch, he loſes half his force when the winch is upward; becauſe he puſhes himſelf as much backward as he puſhes the winch forward; and when the handle of the winch is down, directly below the axle, he loſes half his force; becauſe the winch pulls him as much toward it as he pulls it toward him: and, therefore, the greateſt effect of his force on the machine is when he either pulls the winch upward, on the ſide of the axle next to him, or puſhes it

downward, on the ſide fartheſt from him. Yet, even in theſe caſes, the pulling force is ſtronger than the puſhing.

In order to remedy this defect as much as poſſible, the handles ſhould be ſo placed as to ſtand at right angles to one another; and then, where there is a man at each handle, the effect of the one man's force will be greateſt when the effect of the other man's is leaſt upon the machine. Whereas, in the common way of placing theſe handles, when the effect of one man's force is the greateſt, the other man's is ſo too; and when the effect of that man's force is the leaſt, ſo alſo is the other's; which is working at the greateſt diſadvantage poſſible.


15
62
NOV

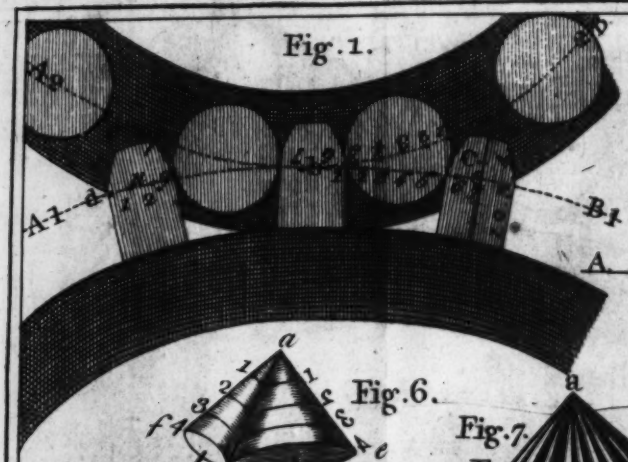
Fig. 1.

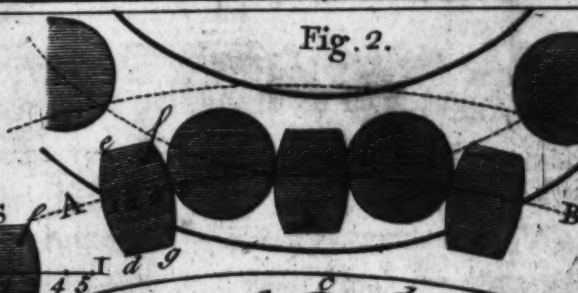

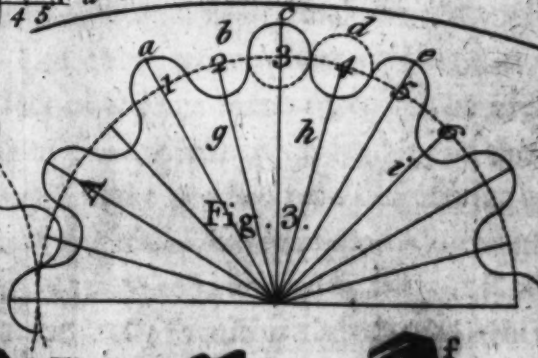

Fig. 2.


Fig. 6.


Fig. 7.


Fig. 3.


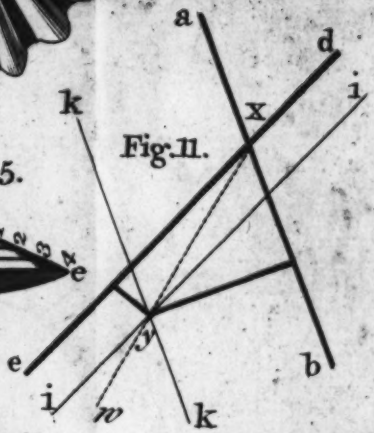

Fig. 8.


Fig. 10.


Fig. 11.

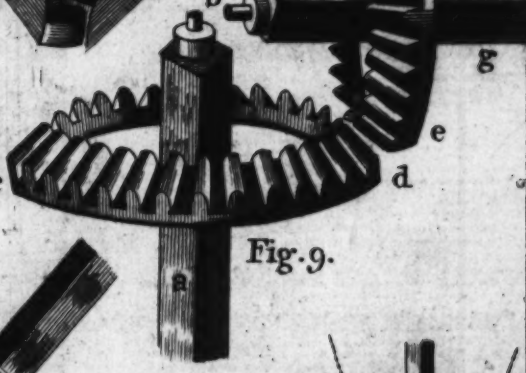

Fig. 9.


Fig. 5.



Fig. 4.


Fig. 13.



Fig. 12.


Fig. 14.


Fig. 15.



MILL-WORK.

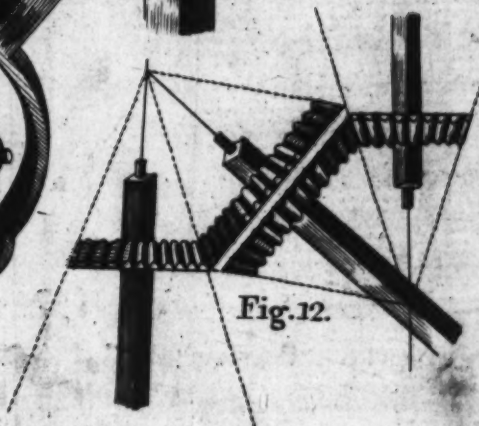In the Conſtruction of Water Mills, it will be neceſſary to obſerve the following Rules.

MEASURE the perpendicular height of the fall of water, in feet, above that part of the wheel on which the water begins to act, and call that the height of the fall.

II. Multiply this conſtant number 64,2882 by the height of the fall in feet, and the ſquare root of the product ſhall be the velocity of the water at the bottom of the fall, or the number of feet that the water there moves per ſecond.

III. Divide the velocity of the water by three, and the quotient ſhall be the velocity of the float-boards of the wheel, or the number of feet they muſt each go thro' in a ſecond, when the water acts upon them ſo as to have the greateſt power to turn the mill.

IV. Divide the circumference of the wheel in feet by the velocity of its floats in feet per ſecond, and the quotient ſhall be the number of ſeconds in which the wheel turns round.

V. By

V. By this laſt number of ſeconds divide 60, and the quotient ſhall be the number of turns of the wheel in a minute.

VI. Divide 120 (the number of revolutions a millſtone 4½ feet diameter ought to have in a minute) by the number of turns of the wheel in a minute, and the quotient ſhall be the number of turns the millſtone ought to have for one turn of the wheel.

VII. Then, as the number of turns of the wheel in a minute is to the number of turns of the millſtone in a minute, ſo muſt the number of ſtaves in the trundle be to the number of cogs in the wheel, in the neareſt whole numbers that can be found.

By theſe rules the following table is calculated to a water wheel 18 feet diameter; which, I apprehend, may be a good ſize in general.

To aſcertain the force or power of any moderate ſtream of water, let the ſame be obſtructed by a dam acroſs the ſtream, ſo as to force all the water through a trough or open ſpout into a large veſſel or reſervoir, by meaſuring ſo much water as ſhall be received as above, in any given time, viz. a ſecond, minute, &c.; and multiplying the ſame by the number of ſeconds or minutes in an hour, the whole force or impulſe of ſuch ſtream of water per hour at any given height, may be readily aſcertained in rivers too large to be meaſured as above, the force or impulſe may be calculated from the ſpace that a ſtraw floating upon the ſurface of the water, in any given time, and at a medium depth and width of the river, will deſcribe.

The

The Mill-Wright's Table.

Height of the fall of water.	Velocity of the fall of water per second.		Velocity of the wheel per second.		Revolutions of the wheel per minute.		Revolution of the millstone for one of the wheel.		Cogs in the wheel, and staves in the trundle.		Revolutions of the millstone per minute by these staves and cogs.	
Feet.	Feet.	100 parts of a foot.	Feet.	100 parts of a foot.	Revolutions.	100 parts of a rev.	Revolutions.	100 parts of a rev.	Cogs.	Staves.	Revolutions.	100 parts of a rev.
1	8	02	2	67	2	83	42	40	254	6	119	84
2	11	34	3	78	4	80	30	00	210	7	120	00
3	13	89	4	63	4	91	24	44	196	8	120	28
4	16	04	5	35	5	67	21	16	190	9	119	74
5	17	93	5	98	6	34	18	92	170	9	119	68
6	19	64	6	55	6	94	17	28	156	9	120	20
7	21	21	7	07	7	50	16	00	144	9	120	00
8	22	68	7	56	8	02	14	96	134	9	119	34
9	24	05	8	02	8	51	14	10	140	10	119	14
10	25	35	8	45	8	97	13	38	134	10	120	18
11	26	59	8	86	9	40	12	76	128	10	120	32
12	27	77	9	26	9	82	12	22	122	10	119	80
13	28	91	9	64	10	22	11	74	118	10	120	36
14	30	00	10	00	10	60	11	32	112	10	118	72
15	31	05	10	35	10	99	10	92	110	10	120	96
16	32	07	10	09	11	34	10	58	106	10	120	20
17	33	06	11	02	11	70	10	26	102	10	119	34
18	34	02	11	34	12	02	9	98	100	10	120	20
19	34	95	11	65	12	37	9	70	98	10	121	22
20	35	86	11	95	12	68	9	46	94	10	119	18
1	2		3		4		5		6		7	

To conſtruct a mill by this table, find the height of the fall of water in the firſt column, and againſt that height in the ſixth column, you have the number of cogs in the wheel, and ſtaves in the trundle, for cauſing the mill-ſtone 4 feet 6 inches diameter, to make about 120 revolutions in a minute, as near as poſſible, when the wheel goes with one third part of the velocity of the water. And it appears by the 7th column, that the number of cogs in the wheel, and ſtaves in the trundle, are ſo near the truth for the required purpoſe, that the leaſt number of revolutions of the millſtone in a minute is 118, and the greateſt number never exceeds 121; which is according to the ſpeed of ſome of the beſt mills I have yet ſeen.

A leſs quantity of water will turn an overſhot than what will turn an underſhot or breaſt wheel; as an overſhot is actuated by the ſtatical weight, or gravity, and the underſhot or breaſt by impulſe only; ſo that where there is but a ſmall quantity of water, and a fall great enough for the wheel to lie under it, the overſhot wheel is always uſed. But where there is a large body of water, and little fall, the underſhot wheel muſt take place. Where the water runs only upon a little declivity, it can act but ſlowly upon the under part of the wheel; in which caſe, the motion of the wheel will be very ſlow: and therefore, the float-boards ought to be very long, though not high, that a large body of water may act upon them; ſo that what is wanting in velocity, may be made up in power; and then the cog-wheel may have a greater number of cogs, in proportion to the rounds in the trundle, in order to give the millſtone a ſufficient degree of velocity.

The

The Method for ſetting out a Spur Wheel and Wallower.

DRAW the pitch lines A 1, B 1, A 2, 2 B; then divide them into the number of teeth or cogs required, as a b c. Plate II. Fig. 1.

Divide one of thoſe diſtances, as b c, into ſeven equal parts, as 1, 2, 3, 4, 5, 6, 7; three parts allow for the thickneſs of the cogs, as 1, 2, 3 in the cog a, and four for the thickneſs of the ſtave, of the wallower (one reaſon for allowing three parts for the cog, and four for the ſtave is, the wallower is in general of leſs diameter than the wheel, therefore ſubject to more wear in proportion of the number of cogs, to the number of ſtaves; but if there is the ſame number of ſtaves as of cogs, they may be of equal thickneſs) as 1, 2, 3, 4, in the ſtave m, Fig. 2; the height of the cog is equal to four parts; then divide its height into five equal parts, as 1, 2, 3, 4, 5, in the cog C; allow three for the bottom to the pitch line of the cog; the other two parts for epicycloid, ſo as to fit and bear on the ſtave equally. The millwrights in general put the point of a pair of compaſſes in the dot 3, of the cog a, and ſtrike the line d, e; then remove the point of the compaſſes to the point d, and ſtrike the curve line 3 f, which they account near enough the figure of the epicycloid.

The method for a face wheel is thus; divide the pitch line A B into the number of cogs intended, as a b c; divide the diſtance b c, into ſeven equal parts; three of thoſe parts allow for the thickneſs of the cogs, as 1, 2, 3 in the cog a, four for the height, and four for the width, as d e, and four for the thickneſs of the ſtave m; draw a line through the Fig. 2.

center of the cog, as the line A I, at S; and on the point 5, deſcribe the line d e; remove the compaſſes to the point A, and draw the line f g, which forms the ſhape of the cog; then ſhape the cog on the ſides to a cycloid, as d e f g, Fig. 1. But this method of ſetting out the ſhape of a cog is variable, according to the cycloid in different diameters of wheels.

Spur Nuts. Fig. 3. In common ſpur nuts, divide the pitch line A, into twice as many equal parts as you intend teeth, as a, b, c, d, e; with a pair of compaſſes opened to half the diſtance of any of theſe diviſions, from the points a 1, c 3, e 5, draw the ſemicircles a, c, and e, which will form the ends of the teeth. From the points 2, 4, and 6 draw the ſemicircles g h i, which will form the hollow curves for the ſpaces; but if the ends of the teeth were epicycloids, inſtead of ſemicircles, they would act much better.

The Principle of Bevel Geer,

Bevel Geer. Fig. 4. CONSISTS in two cones, rolling on the ſurface of each other, as the cone A and B revolving on their centers a b, a c; if their baſes are equal, they will perform their revolutions in one and the ſame time, or any other two points equally diſtant from the center a, as d 1, d 2, d 3, &c. will revolve in the ſame time as f 1, f 2, f 3, &c. In the like manner, if the cones, a d e, be twice the diameters at the baſe d e, as the cones a f e are, then if they turn about their centers, when the cone a f d has made one revolution, the cone a d e will have made but half a revolution; or when a f d has made two revolutions, a d e will have made but one, and every part equally diſtant from the center a, as f 1,

Fig. 5. and 6.

f 1, f 2, f 3, &c. will have made two revolutions to e 1, e 2, e 3, &c. and if the cones were fluted, or had teeth cut in them, diverging from the center a, to the baſes d c, e f, they would then become bevel geer. The teeth at the point of the cone being ſmall and of little uſe, may be cut off at E and F, Fig. 8, as ſeen by Fig. 9, where the upright ſhaft, a b, with the bevel wheel, c d, turns the bevel wheel, e f, with its ſhaft b g, and the teeth work freely into each other, as a b, Fig. 10. The teeth may be made of any dimenſion, according to the ſtrength required; and this method will enable them to overcome a much greater reſiſtance, and work ſmoother than a face wheel and wallower of the common form can poſſibly do; beſides, it is of great uſe to convey a motion in any direction, or to any part of a building, with the leaſt trouble and friction. Fig. 7 and 8. Fig. 8 & 9. Fig. 10.

The method of conveying motion in any direction, and proportioning or ſhaping the wheels thereto, is as follows: let the line a b, repreſent a ſhaft coming from a wheel; draw the line c d to interſect the line a b, in the direction that the motion to be conveyed is intended, which will now repreſent a ſhaft to the intended motion. Fig. 11.

Again, ſuppoſe the ſhaft c d is to revolve three times, whilſt the ſhaft a b revolves once, draw the parallel line i i, at any diſtance not too great, ſuppoſe 1 foot by a ſcale, then draw the parallel line k k at 3 feet diſtance, after which, draw the dotted line w x, through the interſection of the ſhafts a b, and c d, and likewiſe through the interſection of the parallel lines i i and k k, in the points x and y; which will be the pitch line of the two bevel wheels, or the line where the teeth of the two wheels act on each other, as may

Fig. 12. be ſeen Fig. 12, where the motion may be conveyed in any direction.

Fig. 13. The univerſal joint, as repreſented Fig. 13, may be applied to communicate motion inſtead of bevel geer, where the ſpeed is to be continued the ſame, and where the angle does not exceed 30 or 40 degrees, and the equality of motion is not regarded, for as it recedes from a right line, its motion becomes more irregular. This joint may be conſtructed by a croſs, as repreſented in the figure; or with four pins faſtened at right angles upon the circumference of a hoop, or ſolid ball. It is of great uſe in cotton mills, where the tumbling ſhafts are continued to a great diſtance from the moving power. But by applying this joint, the ſhafts may be cut into convenient lengths, by which it will be enabled to overcome greater reſiſtance.

To deſcribe the Cycloid and Epicycloid, of Uſe in Shaping the Teeth of Wheels, &c.

Fig. 14. IF a point or pencil a, on the circumference of the circle, B, proceeds along the plane a C, in a right line, and at the ſame time revolves round its center, it will deſcribe a cycloid.

Fig. 15. And, if the generating circle D, moves along the circumference of another circle E, and at the ſame time turns round its center, the point o will deſcribe an epicycloid.

A Brief

A

Brief Hiſtory of Electricity.

THOUGH it is certain, ever ſince the creation of the world, the electric fluid had all the operations it has at preſent; yet, the diſcovery of its action, and even of its exiſtence, is (comparatively ſpeaking) of a very late date. *Thales* the *Mileſian*, who lived 600 years before Chriſt, was the firſt who obſerved the electrical properties of amber. Of theſe indeed, he knew no more than that this ſubſtance would attract light bodies when it was rubbed. For 300 years after his time, we hear nothing further concerning this ſubject. Theophraſtus then tells us, that the *Lyncurium* (now called the *Tourmalin*), has the property of attracting light bodies, as well as amber. From this time there is a chaſm in the hiſtory of electricity for 1900 years. It was in the beginning of the 17th century that the ſubject of electricity became a diſtinct ſcience, and the foundation was laid of thoſe diſcoveries (which have ſince taken place) by Dr. William Gilbert, an Engliſh phyſician, who may juſtly be called the father of electricians; in the year 1600 he wrote a book *De Magnette*, which contains a variety of electrical experiments. All theſe however, conſidered only the attractive property of certain ſubſtances, which, from their agreement in this reſpect with amber, were called electric. Dr. Gilbert's merit conſiſts in his having been at great pains to find out a number of ſuch ſubſtances,

Electricity when firſt mentioned.

Diſcoveries of Dr. Gilbert.

ſubſtances, and thus conſiderably enlarge the number of electrics.

Mr. Boyle's improvements.

Till the year 1670, it does not appear that any farther diſcoveries were made; except ſome trifling additions to the catalogue of electrics. About this time Mr. Boyle applied himſelf to the ſtudy of electricity; he enlarged the catalogue of electrics, and found that their electric properties were increaſed by warming and wiping them before they were rubbed.

Diſcoveries of Otto Guericke.

Otto Guericke, however, who was cotemporary with Mr. Boyle, improved the ſcience much farther. He made uſe of a ſulphur globe, whirled on an axis, much like our preſent glaſs globes; by which means he excited a greater power of electricity than any of his predeceſſors, and tried all their experiments to much more advantage. He diſcovered the electric repulſion; and not only ſaw the electric light more clearly than Mr. Boyle, but heard the hiſſing ſound with which it is emitted. He alſo made another remarkable diſcovery, but which has ſince been very generally overlooked; viz. that a feather, when repelled by an excited electric, always keeps the ſame face towards the body which repells it, as the moon does to the earth.

Diſcovery by Sir Iſaac Newton.

The next diſcovery of any moment was made by Sir Iſaac Newton; who obſerved, that the electric attraction and repulſion penetrated through glaſs. In the year

Mr. Hawkſbee's improvements

1709 a treatiſe was written on electricity by Mr. Hawkſbee; who not only far excelled all his predeceſſors and cotemporaries, but alſo made ſome diſcoveries which well deſerve the attention of the moſt expert electricians at this day;

he

he was the firſt that applied a glaſs globe to the machine, and he remarked various appearances of the electric light and the noiſe that accompanied it, together with a variety of phænomena relating to electric attraction and repulſion.

After his death, not only the uſe of glaſs globes, but even the ſtudy of electricity itſelf, ſeems to have been pretty generally laid aſide for ſome time. The reaſon of this was, that the recent diſcoveries of Sir Iſaac Newton, engroſſed the attention of philoſophers to ſuch a degree, that they had no leiſure for any other purſuits. However, after the death of that great man, electricity began to revive, and in 1729 a capital diſcovery was made by Mr. Stephen Grey, who (by his curious obſervations) found out the difference between electrics and conductors; who, with the aſſiſtance of Mr. Wheeler, contributed much to the advancement of electricity. Soon after, Mr. Du Fay accidentally diſcovered the difference between poſitive and negative electricity, by obſerving that a piece of leaf gold repelled by an excited glaſs tube, was again eagerly attracted to it, after it had touched ſome body which was not an electric; the ſame was alſo the caſe with roſin, ſealing-wax, ſulphur, and a number of other ſubſtances.

Mr. Grey's diſcovery.

Mr. Du Fay's diſcovery.

It may be obſerved, that although the ſcience had, through the indefatigable attention of ſo many ingenious perſons, and by the diſcoveries that were daily produced, excited the curioſity of philoſophers, and engaged their attention; yet, as the cauſes of every thing, whether ſmall or great, are ſeldom much attended to, if their effects are not particularly ſtriking and ſingular; ſo electricity had till the year 1746 been ſtudied by none but philoſophers, until that

that capital diſcovery of the vaſt accumulation of its power, in what is called the Leyden Phial, was accidentally made by Mr. Muſchenbroek in the year 1746, at which time the ſtudy of electricity became general, and gave more ſurprize even to philoſophers, than any other ſcience whatever; from the time of this diſcovery, electricity became the general ſubject of converſation, and great numbers of people got their livelihood by going about and ſhewing its curious phænomena. It was alſo applied medically, and ſeveral perſons found great benefit by it, particularly a paralytic perſon cured at Geneva, another of a violent pain in his head, alſo a woman of a diſorder in her eyes at Bologna; ſo that from this time we may date the introduction of electricity into the medical art. It is impoſſible to enumerate all the happy effects which have been performed in curing various diſorders incident to the human body by electrical applications.

Mr. Muſchenbroek's experimental diſcovery.

Medical electricity firſt applied.

The ſcience of electricity has ſince the above period been greatly improved by the indefatigable induſtry of the celebrated philoſophers, Dr. Franklin and Dr. Prieſtley; but it would be endleſs to enumerate all the improvements that have been made by a great number of other gentlemen, who have each added ſomething towards its advancement; but whoever would make himſelf acquainted with the particulars concerning thoſe advances, ſhould read over the elaborate hiſtory of electricity compiled by the learned Dr. Prieſtley, a work that will inform him of whatever had been done relative to the ſubject till its publication.

Of

Of the Electric Fluid.


THE earth and all the bodies we are acquainted with, are ſuppoſed to contain a certain quantity of an exceedingly elaſtic and ſubtle fluid, which philoſophers have agreed to term electric. This certain quality belonging to all bodies, may be called their natural ſhare; and ſo long as each body contains neither more nor leſs than this quantity, it ſeems to be wholly dormant, and produces no ſenſible effect; but the moment that the equilibrium is diſturbed, and any body becomes poſſeſſed of more or leſs than its natural quantity, very remarkable effects ariſe from it. The body is ſaid to be electrified, and is capable of exhibiting appearances which are aſcribed to the power of electricity.

This equilibrium could never be diſturbed, or, if it was diſturbed, would be immediately reſtored, and therefore be inſenſible, but that ſome bodies do not admit the paſſage of this electric fluid through their pores, or along their ſurfaces, though others do. By this means, whenever any body has acquired an additional quantity of electric matter, and is everywhere ſurrounded with bodies through which it cannot paſs, it muſt remain overloaded; or, if it has loſt part of what naturally belonged to it, it muſt remain exhauſted; becauſe the ſurrounding bodies prevent any of the fluid from going to it, or coming out of it; and the body is then ſaid to be inſulated. Thoſe bodies through which the electric fluid can paſs are called conductors, and thoſe through which it cannot paſs are called non-conductors of electricity; and into theſe two kinds all bodies whatever are claſſed by electricians.

The beſt conductors of electricity, or thoſe which admit the electric fluid to paſs through them with the greateſt eaſe, are metals of all kinds. And the moſt perfect of the non-conducting claſs of bodies are, glaſs, roſin, ſealing-wax, ſulphur, bees-wax, and baked wood, among ſolids; and oils and air among fluids. But all ſubſtances become conductors when they are made very hot. They are alſo called electrics, and the conducting ſubſtances are called non-electrics.

The method of diſturbing the equilibrium of the electric fluid in bodies, or of making it paſs from one to another, is chiefly friction, or a ſlight rubbing of them, one againſt another. In this caſe the electric fluid will in general leave that ſubſtance which has the rougher ſurface, and paſs upon the other, which is ſmoother; or it will leave that ſubſtance which is the leſs perfect electric, and paſs upon the other which is the more perfect electric of the two. Thus, if I take a ſmooth glaſs tube (ſuch as is repreſented) and draw it through my hand, the effect of that friction is that the electric matter leaves my hand and paſſes upon the glaſs, where it will remain as an addition to its natural quantity. For as neither the glaſs nor the air which ſurrounds it are conductors of electricity, this redundancy of the electric matter cannot poſſibly get away; but if my finger, a piece of metal, or any conducting ſubſtance, be preſented to any part of the glaſs thus overloaded with the electric fluid, it will paſs immediately from that part into them; and if they be preſented to every part of the tube ſucceſſively, the whole of this redundant electricity will be diſcharged, and every thing will become juſt as it was before the operation. The glaſs, in this caſe, is ſaid to be excited, becauſe the friction ſeems to excite

Plate III. Fig. 1.

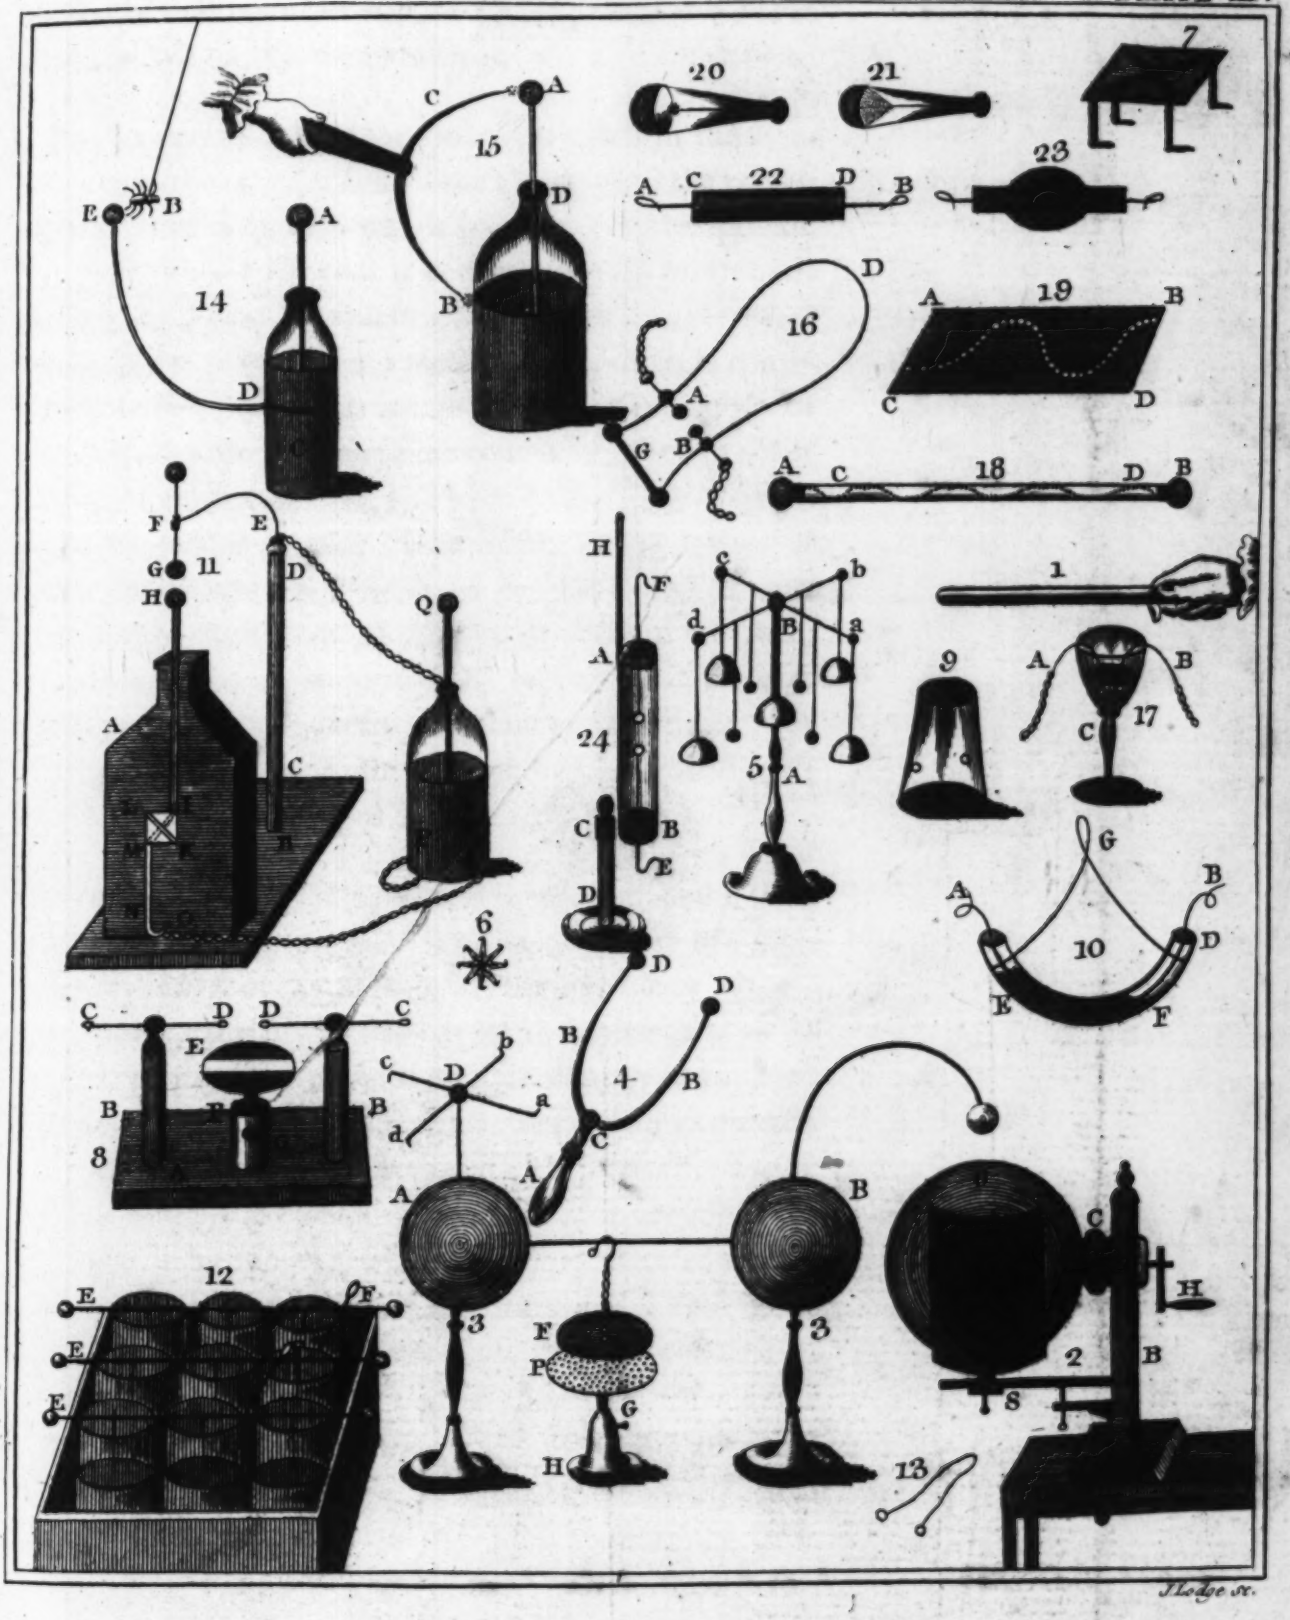

J.Ledge sc.


BRITISH MUSEUM
15
61
NOV

excite, or call upon the electric power which it had before, but which lay dormant in it.

In like manner, when the globe is whirled in the electrical machine, the friction of the glaſs againſt the rubber makes the electric fluid which was in the rubber paſs on the glaſs, from whence it is conveyed to the prime conductor, the points of which are preſented to every part of the globe in ſucceſſion: and as the friction is continued, there will, by this means, be a conſtant ſupply of the electric matter to the prime conductor, though other bodies be preſented to it, and keep diſcharging it all the while in viſible ſparks. The hand, in the former of theſe caſes, and the rubber in the latter, which had parted with their ſhare of the electric fluid to the glaſs, againſt which they were rubbed, receive an immediate ſupply from the conducting ſubſtances in contact with them; and theſe are again ſupplied by the general maſs of the fluid that is lodged in the earth.

On the contrary, if I draw through my hand a ſtick of ſealing-wax, a piece of ſulphur, or a tube of rough glaſs, the effect of the friction is, that a quantity of electric matter naturally belonging to the ſulphur, &c. paſſes from it to my hand; and the ſulphur being ſurrounded by the air, which is a non-conductor, remains exhauſted, and is ready to take ſparks of electric fire from any bodies that are preſented to it. But it is impoſſible to diſtinguiſh by the eye which way the electric matter paſſes, its velocity is ſo extremely great. The ſulphur in this caſe, though deprived of its ſhare of electricity, is ſaid to be excited as well as the glaſs which was overloaded with it, becauſe, though the ſtate they are in be the reverſe of one another, the effects produced by them

are in many reſpects ſimilar. The appearances which lead us to diſtinguiſh them, will be mentioned hereafter.

Of Electrical Attraction and Repulſion.

THE great laws of the electric fluid, and thoſe on which all the phenomena of electricity depend, are, that it is, in a much higher degree than air, elaſtic, and repulſive of itſelf; that two bodies having both of them either more or leſs than their natural ſhare of it, repel one another; but that, if one of them have more and the other leſs than its ſhare, they will attract one another.

Thus, if I hang a bundle of hairs or feathers upon the prime conductor, the moment I electrify them, by turning the wheel of the machine, they begin to fly from one another; ſo that ſome of them will ſtand quite erect, in a beautiful manner, and they cannot be made to collapſe and be brought in contact with one another till I diſcharge the conductor, by taking a ſpark from it with a piece of metal, or ſome other conducting ſubſtance. A large plumy feather alſo grows beautifully turgid when it is electrified, expanding its fibres in all directions; and they collapſe when the electricity is taken off.

If I hold in my hand a bundle of threads, hairs, or feathers, and preſent them to the electrified conductor, the electric fluid with which the conductor is overloaded, repels the electric fluid from thoſe parts of the threads, &c. which are next to it, into the more diſtant parts of thoſe bodies, or into my hand, and ſo into the ground;

ground; the conſequence of which is, that the threads having leſs than their natural ſhare, do ſtrongly repel and avoid one another, and at the ſame time are ſtrongly attracted by the conductor, which is in an oppoſite ſtate. If the conductor had been deprived of its natural ſhare of electricity, the bodies preſented to it would have had more than their natural ſhare; ſo that ſtill the ſame appearance of mutual repulſion, and of attraction by the conductor, would have taken place; and univerſally all bodies that are brought within the influence of electrified bodies, whether they are ſo by having more or leſs than their natural ſhare of the electric fluid, become poſſeſſed of a contrary electricity. For the ſame reaſon, excited electrics of every kind attract all light bodies which are brought within the ſphere of their influence.

Electrical attraction and repulſion are exhibited in a very pleaſing manner, by means of a glaſs tube and a feather. When the tube is excited, by being drawn through the hand, or a rubber, the feather when brought near it, will be attracted and jump to the tube; then, after taking ſome time to get fully ſaturated with electric matter (becauſe, being a bad conductor, it can receive it but very ſlowly) it will ſuddenly jump from it, and fly towards the next conductor, upon which it may diſcharge the redundant electricity it has acquired. If no other body happen to be in the way, it will tend towards the ground; but if the electrified tube be held under it, it will ſtill be repelled, and driven into the middle of the room, where it may be kept ſuſpended, or be driven about in all directions, almoſt as long as a perſon pleaſes, if the air be dry. Experiment

Other beautiful effects of electrical attraction and repulſion are ſhewn at the prime conductor belonging to the

Fig. 3. the machine. Suſpend a plate of metal from the conductor, which is ſupported by two pillars of glaſs, and muſt be ſuppoſed to be ſupplied wth electricity from the globe; and underneath it, at the diſtance of about three or four inches, put another plate of the ſame ſize; upon the lower of theſe plates lay a feather, or a ſmall ſlip of light paper; and, as ſoon as the wheel begins to turn, the feather or the paper will be attracted, and jump to the upper plate F; from which it will be immediately repelled, and fly to diſcharge itſelf upon the lower plate P, which is ſupported on the pedeſtal H G; after which it will be ready to be attracted and repelled again. Thus will the feather or paper fly from the one plate to the other alternately, and with inconceivable rapidity, if the electrification be pretty vigorous. When the pieces of paper are cut into the figures of men and women, they exhibit a kind of dance, which is extremely amuſing.

Electrical bells. Fig. 5. This experiment will be the more diverting if it be accompanied with that of the electrical bells, which depends upon the ſame principle. Four bells, a, b, c, d, hang from braſs rods, communicated with the prime conductor, and another bell, e, fixed on a braſs pedeſtal A, reaching to the ground; and four ſmall braſs balls, ſuſpended by ſilken threads, hang between a, b, c, d, and the bell e in the middle. The conſequence of this diſpoſition is, that the outermoſt bells, which hang from the prime conductor by braſs chains, are electrified, and attract the braſs balls which hang by ſilk; and the attraction being vigorous, they are made to ſtrike the bells with ſome force, and make them ring. Being then loaded with electricity, they are immediately repelled from theſe outermoſt bells, and fly to unload themſelves by

by ſtriking upon the middle bell, which is inſulated by the glaſs pillar B, upon the pedeſtal A; and from which the electric matter paſſes to the floor by means of the braſs pedeſtal A. The braſs balls, which now may be called clappers to the bells, are then ready to be attracted by the outermoſt bells, as at firſt; and thus the ringing may be continued as long as it is agreeable. The amuſement will be heightened, if the electrician now and then touch the prime conductor with a braſs rod, or with his finger; for then the dancing and ringing will ceaſe, and will not be renewed till his finger or the rod be removed. If he conceals this application of his finger, or the rod, with a little art, the figures will ſeem to dance, and the bells to ring, at the word of command.

Of the Electric Spark.

WHEN I preſent a piece of metal, or any other good conducting ſubſtance, to the overloaded prime conductor, the electric matter will paſs with violence from the one to the other; an electric ſpark, with the appearance of fire, will be ſeen darting between them, and a report which is uſually compared to a ſnapping noiſe, will be heard. If the piece of metal that is preſented to the prime conductor be inſulated, ſo that it cannot immediately loſe what it receives, it will only take part of the charge from the prime conductor (the whole of the redundant electricity being divided between them in proportion to their ſurfaces) and either of them will give a ſmaller ſpark to another body that is preſented to them.

When any perſon ſtands upon the ſtool with feet made of glaſs, or baked wood (ſuch as is repreſented) and takes Fig. 7. in

in his hand a chain faſtened to the prime conductor; being then inſulated, he may be conſidered as part of the prime conductor; and any part of his body will exhibit all the ſame appearances which the prime conductor itſelf will do. Thus, if the finger of any perſon ſtanding upon the floor be preſented to him, a ſpark of fire will ſeem to iſſue from him, and both he and the perſon that receives it will feel a painful ſenſation, like a pricking; and the ſame ſnapping noiſe above-mentioned will be heard. Every part of his body will then attract light ſubſtances; and the bits of feathers, or the human figures above-mentioned, cut in paper, and laid on a plate, will perform the ſame dances that were mentioned before, if the palm of his hand be expanded over them. Alſo the hairs of his head, or of his wig, if they happen to be looſe, will repel one another; and many of them will ſtand upright. As theſe electric ſparks, which are attended with a ſenſation moderately painful, will be excited wherever he is touched, or wherever he touches any other perſon, this experiment will thereby furniſh very great diverſion.

Subſtances ſet on fire by electricity.

The electric ſpark has not only the appearance of fire, but is capable of actually ſetting fire to various ſubſtances that are eaſily inflamed; but the inflammation is probably produced by the rapid motion into which the parts of the ſubſtances are thrown, by the action of the electric matter upon them. Thus, if ſpirits of wine be held in a ſpoon, and an electric ſpark be drawn from the ſpoon, ſo as to paſs through any part of the ſpirits, they will catch fire, and burn as if they had been lighted by a candle. The ſpoon in which the ſpirits are contained may either be connected by the prime conductor, and the

ſpark

ſpark drawn through them by a perſon ſtanding on the floor; or the ſpoon may be held by a perſon ſtanding on the floor, and the ſpark be drawn through them by a braſs rod, either connected immediately with the prime conductor, or held in the hand of a perſon ſtanding on the ſtool, in the manner mentioned above. If a candle be blown out, and an electric ſpark be immediately drawn through the ſmoke, it will often be lighted again; but it requires a pretty ſtrong ſpark, and ſome degree of dexterity and experience in the operator, to produce this effect with certainty. It will be more amuſing, and the effect will be as certain, if the ſpark be drawn thro' the ſpirits by the end of a perſon's finger.

Not only are the ſenſes of feeling, ſeeing, and hearing affected by electricity, in the manner deſcribed above, but it is even ſenſible to the ſmell and the taſte. If a pointed braſs rod be electrified, either by being faſtened to the prime conductor, or held in the hand of a perſon electrified, and another perſon ſtanding upon the floor preſent his noſtrils within an inch or two of the point, he will feel a ſtrong and diſagreeable ſmell, like that of burning ſulphur; and if he receive the electric effluvia iſſuing from the point upon his tongue, he will perceive a taſte which is manifeſtly acid.

The machine, as repreſented Fig. 2, was ſuch as my ingenious friend the Rev. Mr. Timothy Prieſtley uſed, on account of its ſimple conſtruction, as not being liable to be out of order ſoon, having no wheel or ſtring either to make any noiſe or need alteration; it may be fixed firm on a table, and taken off in a moment; and the globe may be taken out with the greateſt eaſe, in

order to be packed up. When the inſide of the globe is lined with his compoſition, hereafter mentioned, it will produce more fire than with any other compoſition which I know of.

The ſpring S that is repreſented in the plate, is for thoſe that care not for having the rubber inſulated; but thoſe that are more curious may have them made with the rubber well inſulated by a glaſs pillar, that will hold the rubber to the back part of the globe, as repreſented Plate IV. Fig. 1.

The conſtruction of the electrical machine.

Fig. 2. A is a piece of mahogany, 9 inches ſquare, and 1 inch 1 quarter thick, in which a pedeſtal B is fixed; C is an iron axle, to which is fixed a braſs cap, and to which the globe G is firmly cemented, and runs in a braſs ſocket E, through the middle of the pedeſtal B, and turned by the handle H.

R is the rubber, which is made of a piece of wood cut to the curve of the globe, to which is fixed a leather covering, which being at a little diſtance from the wood in the middle, it will yield to the preſſure of the globe the better.

On this leather is another leather, which will take off by taking out a pin: on this the amalgam is rubbed, and being ſo eaſily taken off, is more readily brought into order than thoſe which have only one leather, and that fixed to the rubber. To this outermoſt leather is fixed a piece of black ſilk, which reaches half round the globe, and greatly increaſes the fire, ſo that it will give fire well, if the rubber ſcarce touch the globe. This machine

will

will ſuit any kind of a conductor; but I prefer paper-globes covered with tin-foil, they being, in my opinion, the moſt compact, and retain the electrical effluvia better than any other ſhape.

Of the Influence of Points in Electricity.

THE more acutely pointed any bodies are, the more eaſily do they take or part with the electric matter. Thus, if a needle, or ſharp-pointed wire, be faſtened to the prime conductor, it will retain but a ſmall degree of electricity, and conſequently will give but a ſmall ſpark when the finger or a piece of metal is preſented to it. Alſo, if the needle, or ſharp pointed wire, be held in the hand of a perſon ſtanding upon the floor, and preſented to the conductor, it will likewiſe be found to retain but a ſmall degree of electricity. In the former of theſe caſes, while the needle was in contact with the prime conductor, the electric matter went off at the point, and was diſperſed in the air, or among the conducting particles, which are always floating in the common atmoſphere. In the latter caſe the needle being preſented towards the conductor, received the electric matter from it at a conſiderable diſtance.

If theſe experiments be made in the dark, a flame will be ſeen at the point of the needle or wire; but the appearance of the fire will not be the ſame in both caſes, but conſiderably different; ſo that it may always be perceived by the eye, whether, according to the common theory, the point be receiving or giving out the electric matter.

If the ſharp pointed wire be giving out the electric matter, the flame will be large; the parts of which it

conſiſts will be fewer; and if the point be not very acute, a kind of ſnapping noiſe will be heard as the electric matter is iſſuing out of it into the air; whereas, if the pointed wire be receiving the electric matter, the flame will be much ſmaller and more globular; the parts of which it conſiſts will be more in number, and the noiſe that is made will be a kind of hiſſing. The flame iſſuing from a body, on account of its oblong form, is called a pencil; and when the rays come to a point they project more equally from the centre, and it is then called a ſtar.

The reaſon why pointed bodies tranſmit the electric fluid with ſo much eaſe, has not yet been thoroughly explained; but the effects of it are exceedingly remarkable. The capital uſe that has been made of this obſervation, has been to draw the electric matter from the clouds, and thereby to prove that lightning and electricity are the ſame thing: for if a long rod or pole with a ſharp pointed wire at one end of it, be ſupported by electric ſubſtances, the point projecting towards the clouds will draw the electric matter from them, and become ſenſibly charged with electricity; juſt as it would have been from being connected with the prime conductor of an electrical machine. It will attract light bodies, ſparks of electric matter may be drawn from it, and it will exhibit every other appearance of common electricity; as, on the other hand, by common electricity, we can produce in miniature all the known effects of lightning.

Fig. 6. Several amuſing experiments depend on this property of pointed bodies, to tranſmit the electric fluid. If a plate of tin be cut into the form of a ſtar, and be ſupported

ported on its center D by a wire projecting from the prime conductor A B; as ſoon as the wheel of the machine is turned, and this apparatus electrified, a flame will appear at the extremity of every angle of the ſtar, which will be very beautiful; and if the ſtar be made to turn ſwiftly on its center, an entire circle of fire will be ſeen in the dark. This experiment will be very ſurprizing to perſons unacquainted with electricity, if the operator now and then privately touch the prime conductor, which may eaſily be managed, as it is performed in the dark; for by this means he may command the appearing or diſappearing of the ſtar, or circle of fire, at pleaſure.

If two ſharp pointed wires be bent, with the four ends at right angles, in the ſame plane, but pointing different ways, and be made to turn upon a center D; the moment it is electrified a flame will be ſeen at the points a b c d; but what is moſt ſurprizing in the experiment is, that the wire will, at the ſame time, begin to turn round in the direction oppoſite to that to which the points are turned, as if ſome viſible power acted upon the points, and puſhed againſt them; and if the electrification be continued, the motion will preſently become very rapid.

Electrical horſe race.

If the figures of horſes, cut in paper, be faſtened upon theſe wires, and they be ſo contrived that the points ſhall be in their tails, the experiment will be very beautiful; the horſes will ſeem to purſue one another, though without a poſſibility of any of them overtaking the reſt; and this is called the electrical horſe-race. It is poſſible to make ſeveral of theſe wires, each having a conſiderable number of points bent backwards, with horſes, &c. faſtened to each of them, and turning one above another; and

and then ſome of them may be contrived to move faſter than the others. They may alſo be made to move different ways.

Promiſcuous Experiments.

THE reader in the courſe of this work muſt obſerve in ſeveral of the experiments already deſcribed, the remarkable property that points have, both of throwing off and receiving ſilently the electric fluid; but hereafter I ſhall deſcribe ſome more curious experiments of this kind, by which the influence of points, in reſpect of electricity, may be better underſtood, and which may in a more particular manner demonſtrate the utility of metallic conductors to houſes or piles of building, in order to preſerve them from the damage often occaſioned by a ſtroke of lightning; which is one of the greateſt benefits that mankind has received from the ſcience of electricity.

The Dancing Balls.

Experiment I. FIX a pointed wire on the prime conductor, with the point outward; then take a glaſs tumbler, graſp it with your hands, and preſent its inſide ſurface to the point of the wire on the prime conductor while the machine is in motion; the glaſs in this manner will ſoon become charged; for its inſide ſurface acquires the electricity from the point, and its outſide loſes its natural quantity of electric fluid through the hands, which ſerves as a coating. This done, put a few pith-balls on the table, and cover them with this charged glaſs tumbler. The Fig. 9. balls will immediately begin to leap up along the ſides of the glaſs, as repreſented, and will continue their motion for a conſiderable time.

In this experiment the pith-balls are attracted and repelled

pelled by the electric fluid ſuperinduced upon the inſide ſurface of the glaſs, which they gradually conduct to the table, or other conducting body upon which the glaſs is ſet; at the ſame time that the outward ſurface of the glaſs acquires the electric fluid from the contiguous air. This experiment may be made more diverting by having a glaſs cylinder three inches long, and the ſame in width, open at both ends, with a braſs plate fixed on its top; put any number of balls you pleaſe, and electrify the braſs cover, and the balls will dance with a very rapid motion, which will continue as long as the operator turns the machine.

To prove that Glaſs and other Electrics become Conductors, when they are made very hot.

IN order to aſcertain the conducting quality of hot reſinous ſubſtances, oils, &c. bend a glaſs tube in the form of an arch CEFD, and tie a ſilk ſtring GCD to it, which ſerves to hold it by, when it is to be ſet near the fire: fill the middle part of this tube with roſin, ſealing-wax, &c. then introduce two wires, AE, BF, through its ends, ſo that they may touch the roſin, or penetrate a little way in it. This done, let a perſon hold the tube over a clear fire, ſo as to melt the roſin within it; at the ſame time, by connecting one of the wires A or B with the outſide of a charged jar, and touching the other with the knob of the jar, endeavour to make the diſcharge through the roſin, and you will obſerve that, while the roſin is cold, no ſhocks can be tranſmitted through it; but it becomes a conductor, according as it melts; and when totally melted, then the ſhocks will paſs through it very freely.

Experiment II. Fig. 10.

The

The Thunder-Houſe

Exper. III. Fig. 11. IS an inſtrument repreſenting the ſide of a houſe, either furniſhed with a metallic conductor, or not; by which both the bad effects of lightning ſtriking upon a houſe not properly ſecured, and the uſefulneſs of metallic conductors may be clearly repreſented. A is a board about three quarters of an inch thick, and ſhaped like the gable end of a houſe. This board is fixed perpendicularly upon the bottom board B, upon which the perpendicular glaſs pillar C D is alſo fixed in a hole about eight inches diſtant from the baſis of the board A. A ſmall hole ILMK about a quarter of an inch deep, and nearly one inch wide, is made in the board A, and is filled with a ſquare piece of wood, nearly of the ſame dimenſions. I mention nearly of the ſame dimenſions, becauſe it muſt go ſo eaſily into the hole, that it may drop off by the leaſt ſhaking of the inſtrument. A wire L K is faſtened diagonally to this ſquare piece of wood. Another wire I H of the ſame thickneſs, having a braſs ball H ſcrewed on its pointed extremity, is faſtened on the board A; ſo alſo the wire M N, which is ſhaped in a ring at O. From the upper extremity of the glaſs pillar C D, a crooked wire proceeds, having a ſpring ſocket F, through which a double knobbed wire ſlips perpendicularly, the lower knob G of which falls juſt above the knob H. The glaſs pillar D C muſt not be made very faſt into the bottom board; but it muſt be fixed ſo as it may be pretty eaſily moved round its own axis, by which means the braſs ball G may be brought either nearer or farther from the ball H, without touching the part E F G. Now, when the ſquare piece of wood L M I K (which may repreſent the ſhutter

of

of a window or the like) is fixed into the hole, ſo that the wire L K ſtands in the dotted repreſentation I M, then the metallic communication from H to O is complete, and the inſtrument repreſents a houſe furniſhed with a proper metallic conductor; but if the ſquare piece of wood L M I K is fixed ſo that the wire L K ſtands in the direction L K, as repreſented in the Figure, then the metallic conductor H O, from the top of the houſe to its bottom, is interrupted at I M; in which caſe the houſe is not properly ſecured.

Fix the piece of wood L M I K, ſo that its wire may be as repreſented in the Figure, in which caſe the metallic conductor H O is diſcontinued. Let the ball G be fixed at about half an inch perpendicular diſtance from the ball H, then, by turning the glaſs pillar D C, remove the former ball from the latter: by a wire or chain, connect the wire E F with the wire Q of the jar P, and let another wire or chain, faſtened to the hook O, touch the outſide coating of the jar. Connect the wire Q with the prime conductor, and charge the jar: then, by turning the glaſs pillar D C, let the ball G come gradually near the ball H, and when they are arrived ſufficiently near one another, you will obſerve that the jar explodes, and the piece of wood L M I K is puſhed out of the hole to a conſiderable diſtance from the thunder-houſe. Now the ball G, in this experiment, repreſents an electrified cloud, which when it is arrived ſufficiently near the top of the houſe A, the electricity ſtrikes it; and as this houſe is not ſecured with a proper conductor, the exploſion breaks part of it, *i. e.* knocks off the piece of wood I M.

Repeat the experiment with only this variation, viz. that this piece of wood I M is ſituated ſo that the wire L K may ſtand in the ſituation I M, in which caſe the conductor H O is not diſcontinued; and you will obſerve, that the exploſion will have no effect upon the piece of wood L M, this remaining in the hole unmoved; which ſhews the uſefulneſs of the metallic conductor.

Further, unſcrew the braſs ball H from the wire H I, ſo that this may remain pointed, and with only this difference in the apparatus, repeat both the above experiments; and you will find the piece of wood I M is in neither caſe moved from its place, nor any exploſion will be heard.

Of the Electrical Battery.

Fig. 12. A number of coated jars connected together in ſuch manner that their whole force may be united, and act like one jar, conſtitutes what is called an electrical battery. This battery is the moſt formidable and entertaining part of an electrical apparatus; and by its uſe many wonderful effects are produced.

If a battery is required of no very great power, as containing about eight or nine ſquare feet of coated glaſs, I ſhould recommend to make uſe of common pint or half pint phials, ſuch as apothecaries uſe. They may be eaſily coated with tin-foil on the outſide, and braſs filings on the inſide; they occupy a ſmall ſpace, and on account of their thinneſs hold a very good charge. But when a large battery is required, then theſe phials

cannot

cannot be uſed, for they break very eaſily; and for that purpoſe cylindrical glaſs jars, of about fifteen inches high and four or five inches in diameter, are the moſt convenient.

When glaſs plates or jars, having a ſufficiently large opening, are to be coated, the beſt method is to coat them with tin-foil on both ſides, which may be fixed upon the glaſs with paſte made of wheat-flour; but in caſe the jars have not an aperture large enough to admit the tin-foil, and an inſtrument to adapt it to the ſurface of the glaſs, then braſs-filings, ſuch as are ſold by the pin-makers, may be advantageouſly uſed; and they may be ſtuck with gum-water, bees wax, &c. Care muſt be taken that the coatings do not come very near the mouth of the jar, for that will cauſe the jar to diſcharge itſelf. If the coating is about two inches below the top, it will in general do very well; but there are ſome kinds of glaſs eſpecially tinged glaſs, that when coated and charged, have the property of diſcharging themſelves more eaſily than others, even when the coating is five or ſix inches below the edge. There is another ſort of glaſs like that of which Florence flaſks are made, which, on account of ſome unvitrified particles in its ſubſtance, is not capable of holding the leaſt charge; on theſe accounts therefore whenever a great number of jars are to be choſen for a large battery, it is adviſeable to try ſome of them firſt, ſo that their quality and power may be aſcertained.

A battery compoſed of twelve jars coated in the inſide and outſide with tin-foil, which altogether contain about welve feet of coated glaſs. About the middle of each of theſe jars is a cork that ſuſtains a wire, which at the top

is faſtened round, or ſoldered to the wire E, knobbed at each end; which connects the inſide coatings of three jars; and by four wires ſuch as F F, the inſide coatings of all the twelve jars may be connected together. Each of the wires F, has a ring at one end, through which one of the wires E paſſes, and the other end has a braſs knob. If the whole force of the battery is not required, one, two, or three rows of jars may be uſed at pleaſure; for as each of the wires F F is moveable round the wire E, which paſſes through its ring, and reſts upon the next wire E, it may be eaſily removed from that, and turned upon the contrary wire E; and thus the communication between one row of jars and another may be diſcontinued at pleaſure. *See the Figure.*

The ſquare box that contains theſe jars is of wood, lined at the bottom with tin-foil, and has two handles on two oppoſite ſides, by which it may be eaſily removed. In one ſide of the box is a hole, through which an iron hook paſſes, which communicates with the metallic lining of the box, and conſequently with the outſide coating of all the jars. To this hook is faſtened a wire, the other end of which is connected with the diſcharging rod.

Fig. 4. The diſcharging rod conſiſts of a glaſs handle A, and two curved wires B B, which move by a joint C, fixed to the braſs cap of the glaſs handle A. The wires B B are pointed, and the points enter the knobs D D, to which they are ſcrewed, and may be unſcrewed from them at pleaſure. By this conſtruction we have the opportunity of uſing the balls or the points as occaſion requires; and as the wires are moveable by the joint C, they may be adapted to ſmaller or larger at pleaſure.

The

The battery repreſented in the plate, is a ſmall one in compariſon to thoſe now frequently uſed, and much too weak for the purpoſe of ſome experiments. But I thought it ſufficient to give an idea of its conſtruction; and when a large battery is to be conſtructed, I would recommend rather to make two, three, or more ſmall ones as repreſented in the plate, than a ſingle large battery, which is heavy, and, on ſeveral accounts, inconvenient. The force of ſeveral ſmall batteries may be eaſily united by a wire or chain; and thus they may be made to act in every reſpect like a large one. The beſt conſtruction of a battery is to have a wire from every jar, connected with a ball at the top, in form of a wire-cage.

The force of accumulated electricity, great as it appears by the experiments performed with a ſingle coated jar, is very ſmall when compared with that which is produced by a number of jars connected together; and if the effects of a ſingle jar are ſurpriſing, the prodigious force of a large battery is certainly aſtoniſhing. To obſerve that the metals, even the moſt putrified platina, which reſiſts the greateſt efforts of chemic fire, are actually, and almoſt inſtantaneouſly rendered red hot, and fuſed; to ſee animals deſtroyed, and to hear the loud report of a large electric battery, are things that always produce a kind of terror in the mind of an attentive obſerver. Experiments of this kind ſhould be conducted with great caution; and the operator ought to be attentive not only to the buſineſs in hand, but alſo to the perſons who may happen to be near him, prohibiting their touching, or even coming too near any part of the apparatus: for if a miſtake in performing other experiments may be diſagreeable, thoſe in the diſcharge of a large battery may be attended with worſe conſequences.

When

When a battery is to be charged, inſtead of a large prime conductor, a ſmall one is much more convenient: for in this caſe, the diſſipation of the electricity is not ſo conſiderable. The quadrant electrometer, which ſhews the height of the charge in the battery, may be fixed either upon the prime conductor, or upon the battery; in which caſe, it ſhould be fixed upon a rod proceeding from the wires of the jars; and if the battery be very large, it ſhould be elevated two or three feet above them.

The index of the electrometer in charging a large battery will ſeldom riſe ſo high as 90°, becauſe the machine cannot charge a battery ſo high in proportion as a ſingle jar. Its limit is often about 60° or 70°, more or leſs, in proportion to the ſize of the battery and the force of the machine.

The Spider ſeemingly animated by Electricity.

Experiment IV. Fig. 14.

AN electric jar, having a wire C D E, faſtened on its outſide, which is bended ſo as to have its knob E as high as the knob A. B is a ſpider made of cork with a few ſhort threads run through it to repreſent its legs. This ſpider is faſtened at the end of a ſilk thread, proceeding from the cieling of the room, or from any other ſupport, ſo that the ſpider may hang mid-way between the two knobs A E, when the jar is not charged. Let the place of the jar upon the table be marked; then charge the jar by bringing its knob A, in contact with the prime conductor, and replace it in its marked place. The ſpider will now begin to move from knob to knob, and continue this motion for a conſiderable time, ſometimes for ſeveral hours.

The

The inſide of the jar being charged poſitively, the ſpider is attracted by the knob A, which communicates to it a ſmall quantity of electricity: the ſpider then becoming poſſeſſed of the ſame electricity with the knob A, is repelled by it, and runs to the knob E, where it diſcharges its electricity, and is then again attracted by the knob A, and ſo on. In this manner the jar is gradually diſcharged; and when the diſcharge is nearly completed, the ſpider finiſhes its motion.

The Spiral Tube.

An inſtrument compoſed of two glaſs tubes C D, one within another, and cloſed with two knobbed braſs caps A and B. The innermoſt of theſe tubes has a ſpiral row of ſmall round pieces of tin-foil, ſtuck upon its outſide ſurface, and lying at about one thirteenth of an inch from each other. If this inſtrument be held by one of its extremities, and its other extremity be preſented to the prime conductor, every ſpark that it receives from the prime conductor, will cauſe ſmall ſparks to appear between all the round pieces of tin-foil ſtuck upon the innermoſt tube, which in the dark affords a pleaſing ſpectacle, the inſtrument appearing encompaſſed by a ſpiral line of fire. Experiment V. Fig. 18.

The ſmall round pieces of tin-foil are ſometimes ſtuck upon a flat piece of glaſs A B C D, ſo as to repreſent curve lines, flowers, letters, &c. and they are illuminated after the ſame manner as the ſpiral tube; *i. e.* by holding the extremity C or B in the hand, and preſenting the other extremity to the prime conductor when the machine is in motion. They may alſo be fixed in any other poſition by having connecting wires. Fig. 19.

To

To ſhew that the Electric Fluid prefers a ſhort Paſſage through the Air to a long one through good Conductors.

Experiment VI. Fig. 16.

BEND a wire about ten feet long, at the ends of which fix a piece of glaſs G, to keep the parts A B at a proper diſtance, ſo that they may ſlide within half an inch of one another if required; then connect the chains belonging to the ſliding wires with the hook of the battery and the diſcharging rod, and ſend the charge of a battery through it. On making the exploſion, a ſpark will be ſeen between A and B, which ſhews that the electric fluid chuſes rather a ſhort paſſage through the air than a long one through the wire. The charge, however, does not paſs entirely through A and B, but part of it alſo goes through the wire, which may be proved by putting a ſlender wire between A and B; for on making the diſcharge, with only this addition in the apparatus, the ſmall wire will hardly be made red-hot, whereas if the large wire A D B be cut in D, ſo as to diſcontinue the circuit A D B, the ſmall wire will be melted, and even exploded by the ſame ſhock that before made it ſcarcely red-hot. In this manner the conducting power of different metals may be tried, uſing metallic circuits of the ſame length and thickneſs, and obſerving the difference of the paſſage through the air in each.

To ſwell Clay, and break ſmall Tubes with Electric Exploſion.

Experiment VII. Fig. 22.

ROLL up a piece of ſoft tobacco-pipe clay in a ſmall cylinder C D, and inſert in it two wires A B, ſo that their ends within the clay may be about a fifth part of an inch from

from one another. If a ſhock be ſent through this clay, by connecting one of the wires A or B with the outſide of a charged jar, and the other with the inſide, it will be inflated by the ſhock; *i. e.* by the ſpark that paſſes between the two wires, and after the exploſion, will appear as repreſented, Fig. 23. If the ſhock ſent thro' it is too ſtrong, and the clay not very moiſt, it will be broken by the exploſion, and its fragment ſcattered in every direction Fig. 23.

To make this experiment with a little variation, take a piece of the tube of a tobacco-pipe, about one inch long, and fill its bore with moiſt clay, then inſert in it two wires, as in the above rolled clay, and ſend a ſhock through it. This tube will not fail to burſt by the force of the exploſion, and its fragments will be ſcattered about to a great diſtance.

If, inſtead of clay, the above-mentioned tube of the tobacco-pipe, or a glaſs tube (which will anſwer as well) be filled with any other ſubſtance, either electric or non-electric, inferior to metal, on making the diſcharge, it will be broken in pieces with nearly the ſame force.

An Electrometer:

WHICH conſiſts of a lined thread, having at each end a ſmall cork or pith-ball. This electrometer is ſuſpended by the middle of the thread on any conductor proper for the purpoſe, and ſerves to ſhew the kind and quantity of its electricity, by applying a ſtick of ſealing wax excited, or an excited ſmooth glaſs tube to the balls, which will recede or collapſe when the above wax or tube are applied alternately. By this means it will ſhew Fig. 13.

whether the conductor be charged positively or negatively; for if it be charged positively by applying the excited glass, the balls will recede still further asunder, and on applying the excited wax, they collapse together.

The Universal Discharger:

Fig. 8. WHICH is of extensive use, and is composed of the following parts: A is a flat board fifteen inches long, four inches broad, and one thick, or thereabouts, which forms the basis of the instrument. B B are two glass pillars cemented in two holes upon the board A, and furnished at the top with brass caps, each of which has a turning joint, and supports a spring tube, through which the wire D C slides. Each of these caps is composed of three pieces of brass, connected so, that the wire D C, besides its sliding through the socket, has two other motions, viz. an horizontal and vertical one. Each of the wires D C, D C, is furnished with an open ring at one end, and at the other end has a brass ball, D, which, by a short spring socket, is slipt upon its pointed extremity, and it may be removed from it at pleasure. E is a strong circular piece of wood five inches in diameter, having, on its surface, a slip of ivory inlaid, and furnished with a strong cylindrical foot, which fits the cavity of the socket F, which is fastened in the middle of the bottom board, and has a screw G, which serves to fasten the foot of the circular board E at any required height.

To prove that the Electric Spark displaces and rarefies the Air.

Experiment VIII. Fig. 24. THE electrical thermometer being very useful to observe the effects of the electric explosion upon air, the

the body of this thermometer conſiſts of a glaſs tube, A B, about ten inches long, and nearly two inches diameter; and cloſed air-tight at both ends by two braſs caps. Through a hole in the upper cap, a ſmall tube, H A, opens at both ends, is introduced in ſome water, at the bottom B of the large tube. Thro' the middle of each of the braſs caps, a wire FGEI is introduced, having a braſs knob within the glaſs tube, and by ſliding through the caps, they may be ſet any diſtance from each other. This inſtrument is, by a braſs ring C, faſtened to the pillar of the wooden ſtand C D, that ſupports it. When the air within the tube A B is rarefied, it will preſs upon the water at the bottom of the tube, which will conſequently riſe in the cavity of the ſmall tube; and as this water riſes higher or lower, ſo it ſhews the greater or leſs rarefaction of the air within the tube A B, which has no communication with the external air.

If the water when this inſtrument is to be uſed, is all at the bottom of the large tube, *i. e.* none of it is in the cavity of the ſmall tube; it will be proper to blow with the mouth into the ſmall tube, and thus cauſe the water to riſe a little in it; where, for better regulation, a mark may be fixed.

Bring the knobs G I of the wires I E, F G, into contact with one another, then connect the ring E or F with one ſide of the charged jar, and the other ring with the other ſide, by which operation a ſhock will be made to paſs through the wires I G, I E, *i. e.* between the knobs G I. In this caſe you will obſerve that the water in the ſmall tube is not at all moved from the mark; which ſhows that the paſſage of the electric fluid, through conductors ſufficiently large, occaſions no rarefaction, nor diſplaces the air about them.

Put the knobs G I a little diſtant from one another, and ſend a ſhock through them as before, and you will ſee that the ſpark between the two knobs not only diſplaces, but rarefies conſiderably the air; for the water will be ſuddenly puſhed almoſt at the top of the ſmall tube, and immediately it will ſubſide a little; as for inſtance, as far as H; which is occaſioned by the ſudden diſplacing and replacing of the air about the place where the ſpark appeared within the tube A B. After that the water has ſubſided ſuddenly from the firſt riſing, it will then gradually and ſlowly come down to the mark at which it ſtood before the exploſion; which is the effect of the air that was rarefied, and which gradually returns to its former temperature.

If this experiment be made in a room where the degree of heat is variable, then proper allowance muſt be made for this circumſtance, in eſtimating the event of the experiment; for the electrical air-thermometer is affected by heat or cold in general, as well as by that cauſed by an electric ſpark.

The Courſe of the Electric Fluid in the Diſcharge, rendered viſible by the Star and Pencil.

Fig. 15. WHEN a jar is charged, take a diſcharging rod having its ends pointed; *i. e.* the diſcharging rod repreſented in Fig. 4, without its knobs, and keep it as repreſented Fig. 15; *i. e.* in ſuch a ſituation, that one of its points C may be at about one inch diſtance from the knob A, and the other point B, at an equal diſtance from the outſide coating of the jar: by theſe means the jar will be diſcharged ſilently; and if its inſide be electrified poſitively, you will ſee that the point of the diſcharging rod

is illuminated with a ſtar, and the point B with a pencil; becauſe, in this caſe, the electric fluid, going from the inſide to the outſide of the jar, enters the point C, and iſſues from the point B. But if the jar is electrified negatively on the inſide, and conſequently poſitive on the outſide, then the pencil of rays will appear upon the point C, and the ſtar upon the point B: for in this caſe the electric fluid paſſes from the outſide to the inſide of the jar. This experiment, as well as any other in which the electric light is to be obſerved, requires to be made in the dark.

The Leyden Vacuum.

A SMALL phial coated on the outſide about three inches up the ſide with tin-foil; at the top of the neck of this phial a braſs cap is cemented, having a hole with a valve; and from the cap a wire proceeds a few inches within the phial, terminating in a blunt point. When this phial is exhauſted of air, a braſs ball is ſcrewed upon the braſs cap, which is cemented into its neck, ſo as to defend the valve, and prevent any air from getting into the exhauſted glaſs. The inſide of this phial requires no coating, becauſe, as the electric fluid pervades vacuum, it can paſs freely from the wire to the ſurface of the exhauſted glaſs, without the help of a non-electric coating. This phial exhibits clearly the direction of the electric fluid both in charging and diſcharging; for if it be held by its bottom, and its braſs knob be preſented to the prime conductor poſitively electrified, you will ſee that the electric fluid cauſeth the pencil of rays to proceed from the wire within the phial, as repreſented Fig. 21, and if it is diſcharged, a ſtar will appear in the place of

Fig. 20.

Experiment IX.

Fig. 21.

of the pencil, as repreſented in Fig. 20. But if the phial is held by the braſs cap, and its bottom be touched by the prime conductor, then the point of the wire on its ſide will appear illuminated with a ſtar when charging, and with a pencil when diſcharging. If it be preſented to a prime conductor electrified negatively, all theſe appearances both in charging and diſcharging, will be reverſed.

This experiment of the Leyden vacuum, exhibits an ocular demonſtration of the hypotheſis of a ſingle electric fluid.

To make the Electric Spark viſible in Water.


Experiment X

FILL a glaſs tube of about half an inch diameter, and ſix inches long, with water, and to each extremities of the tube adapt a cork, which may confine the water; through each cork inſert a blunt wire, ſo that the extremities of the wires, within the tube, may be very near one another: laſtly, connect one of theſe wires with the coating of a ſmall charged phial, and touch the other wire with the knob of it; by which means the ſhock will paſs through the wires, and cauſe a vivid ſpark to appear between their extremities within the tube. In performing this experiment, care muſt be taken that the charge be exceeding weak, otherwiſe the tube will burſt.

Fig. 17.

In a common drinking glaſs almoſt full of water, immerge A B, which are two knobbed wires ſo bent, that their knobs may be within a little diſtance of one another in the water. If one of theſe wires be connected with the outſide coating of a pretty large jar, and the other

BRITISH MUSEUM
15 61
NOV

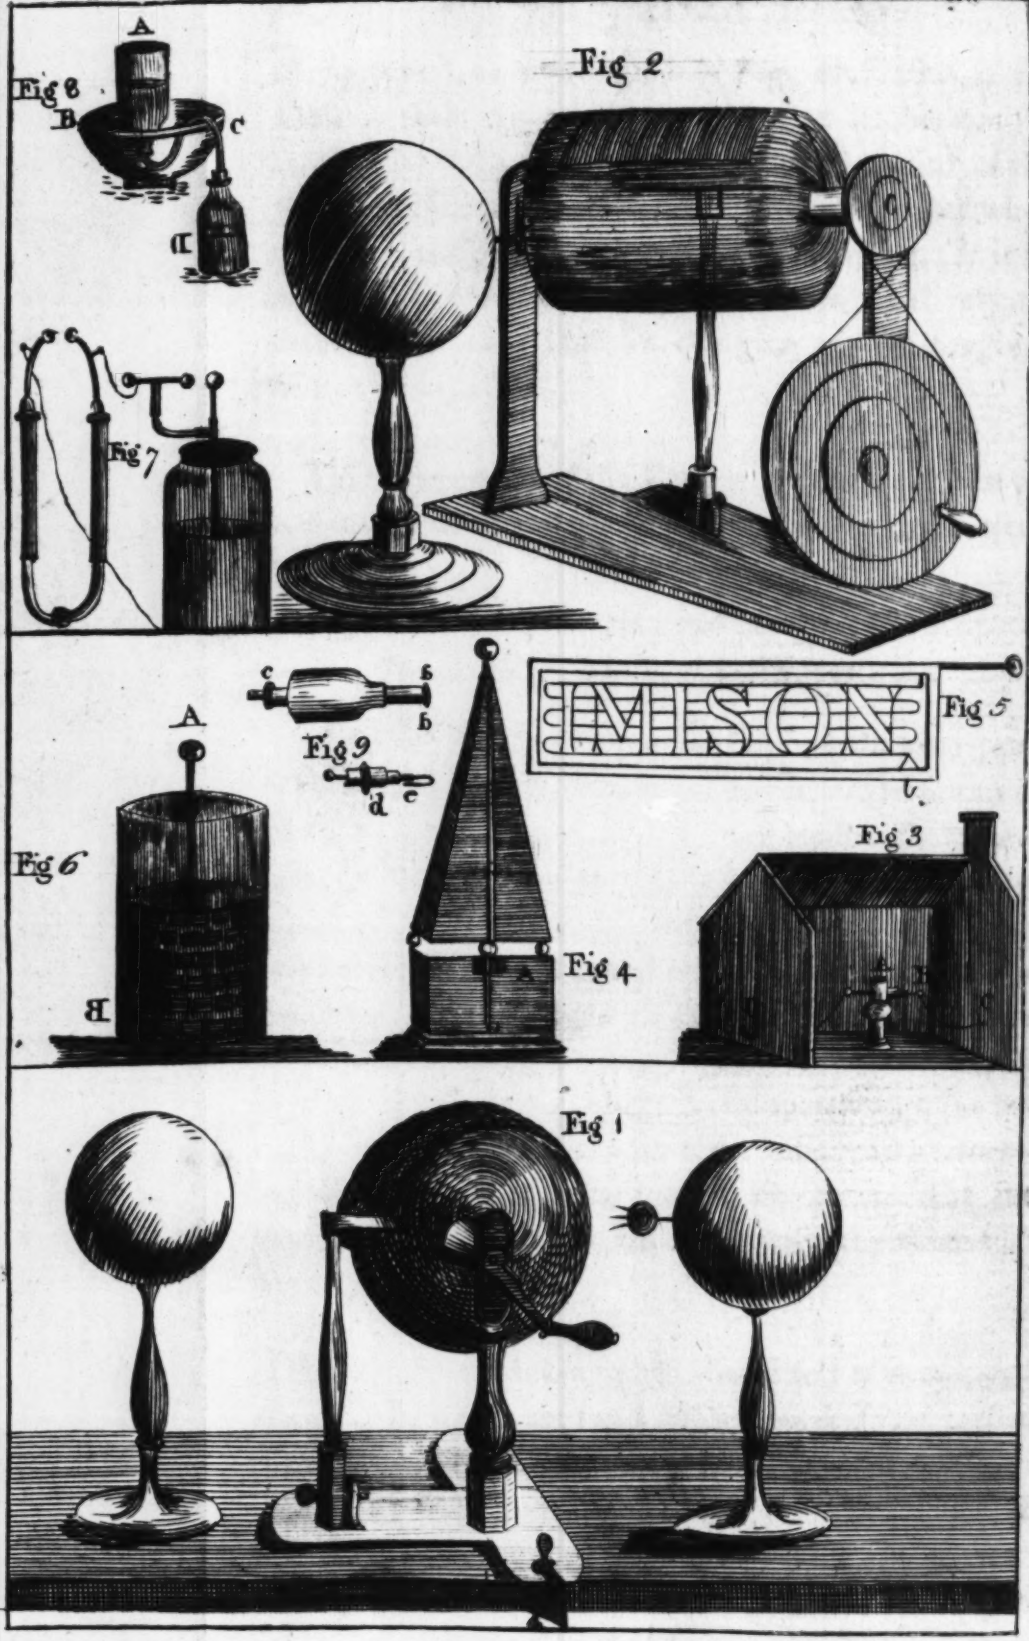
Fig 8
A
B
C
D
Fig 2
Fig 7
Fig 9
c
f
b
d
e
Fig 6
A
B
MISON
Fig 5
b
Fig 3
Fig 4
Fig 1

other wire be touched with the knob of it, the exploſion which muſt paſs through the water from the knob of one of the wires to that of the other, will diſperſe the water, and break the glaſs with a ſurpriſing violence. This experiment is very dangerous, if not conducted with great caution.

The Powder-Houſe

IS an ingenious contrivance, and well adapted to the purpoſe: the front is fitted up like the thunder-houſe; it is generally made 7 or 8 inches long, and nearly the ſame height to the top of the roof; the ſide and that half of the roof next the eye, is omitted in the figure, that the inſide may be more conveniently ſeen. The ſides, back, and front of the houſe are joined to the bottom by hinges; the roof is divided into two parts, which are alſo faſtened by hinges to the ſides; the building is kept together by a ridge fixed half-way on one ſide of the roof, ſo that when the building is put together, the other half of the ridge laps over the other half of the roof, and holds it together. Within the houſe there is a braſs tube 1½ inch long, and 5-8ths of an inch in diameter ſcrewed on a pedeſtal of wood; into the ſide of this braſs tube is ſcrewed a wire, which goes thro' 1-8th of an inch or better; the other end, by means of a chain, has a communication to the hook D; at the other ſide of the tube a piece of ivory, one inch long, is ſcrewed, with a ſmall hole for the wire to ſlide into. Plate IV. Fig. 3.

To uſe this apparatus, fill the glaſs tube A with gunpowder, and ram the wire B a ſmall way into the ivory tube; then connect the hook C with the bottom of a large jar or battery; and when the jar, &c. is charged, form

form a communication from the book D to the top of the jar, &c. the diſcharge will then take place, and the exploſion of the gun-powder will throw aſunder the roof; and the ſides, the fore-front, and back-front will then fall down.

The Pyramid,

Fig. 4. As repreſented, Fig. 4, is deſigned to ſhew the ſame experiments as the thunder-houſe, and is uſed in the ſame manner. When the piece A is thrown out by the diſcharge, the upper part of the pyramid falls down; it is uſually made to repreſent a ſtone ſteeple, and is compoſed of ſeveral pieces; by which means, when the diſcharge is made, there appears greater devaſtation.

The Luminous Word.

Fig. 5. This experiment is exactly on the ſame principle as Fig. 18 and 19, Plate III. and the word is formed by the ſmall ſeparations made in the tin-foil; if they were cut a little round at every diviſion, the ſpark by that means would appear more vivid as it paſſed along the windings.

It may be obſerved in making theſe experiments, that the longer any word is, and the oftener the tin-foil is cut, the more powerful the machine muſt be, in order to convey the ſpark from one end to the other; becauſe every time the paſſage is interrupted by cutting, the ſpace is increaſed; and in long conveyances the ſpace will amount to more than the machine will be able to overcome.

There-

Therefore the ſhorter the illuminations are, the more pleaſing they will appear.

To ſhew how a Jar charges and diſcharges.

Coat a jar, as repreſented Fig. 6, by paſting ſmall pieces of tin-foil, at a little diſtance from each other, round its exterior ſurface. As this jar is charging, ſmall ſparks will paſs from one piece of tin-foil to another, in a variety of directions; the ſeparation of the tin-foil is the means of making the paſſage of the fluid, from the outſide of the jar to the table, viſible. Diſcharge this jar, by bringing a pointed wire gradually near the braſs ball, and the uncoated part of the glaſs, between the pieces of tin-foil, will be pleaſantly illuminated, and make a crackling noiſe; but if the jar is diſcharged ſuddenly, the whole outſide ſurface will appear illuminated. The glaſs muſt be very dry to produce theſe appearances to the greateſt advantage. Fig. 6.

How to make Inflammable Air that will take Fire by the Electric Spark.

Procure two bottles, as repreſented A D, Fig. 8; in the bottle D put about 2 or 3 ounces of iron filings, to which put ſome oil of vitriol, mixed with four times its quantity of water, fill the bottle A with water, and fix the bended glaſs-pipe C air-tight into the bottle D, and the other end a little way up the neck of the bottle A, and in a ſhort time the mixture will boil, and emit a fluid, which will paſs through the bended tube C into

the bottle A, and will at laſt fill it; expelling the water into the baſon B. The bottle A is then expeditiouſly corked up for uſe.

The Electrical Piſtol

Fig. 9. Is repreſented by a, b, c, d, e, Fig. 9; c, a, is made of thin braſs; to the mouth a, b, a cork is fitted; and a perforated piece of braſs e, ſcrews on the bottom of the piſtol at c, having a glaſs tube with a wire cemented into it, bended over the glaſs tube, ſo as to reach within one-eighth of an inch of the braſs; when the piſtol is to be charged uncork the inflammable air-bottle, likewiſe the piſtol, and place the mouth of the piſtol upon the top of the bottle, and the common air which is within the piſtol will deſcend while the other aſcends; keep the piſtol in this ſituation a few ſeconds, according to the ſtrength of the inflammable air, then expeditiouſly cork both the bottle and piſtol, and it is charged. To diſcharge it fill a ſmall jar or a hollow handle, and apply it to the little knob of the wire e, it will then explode, and drive out the cork to a conſiderable diſtance, making a report as loud as a piſtol filled with gunpowder.

The Conſtruction of a ſimple Orrery put into Motion by Electricity.

Fig. 1. Plate V. THIS orrery is for ſhewing the earth's motion round its axis in twenty-four hours, the age of the moon from change to change, and all her various phaſes during that time. A is the horizontal board or ſtand of this machine, and B is the great wheel, with eighteen floats or wings for the electric ſtream to act upon, and turn the

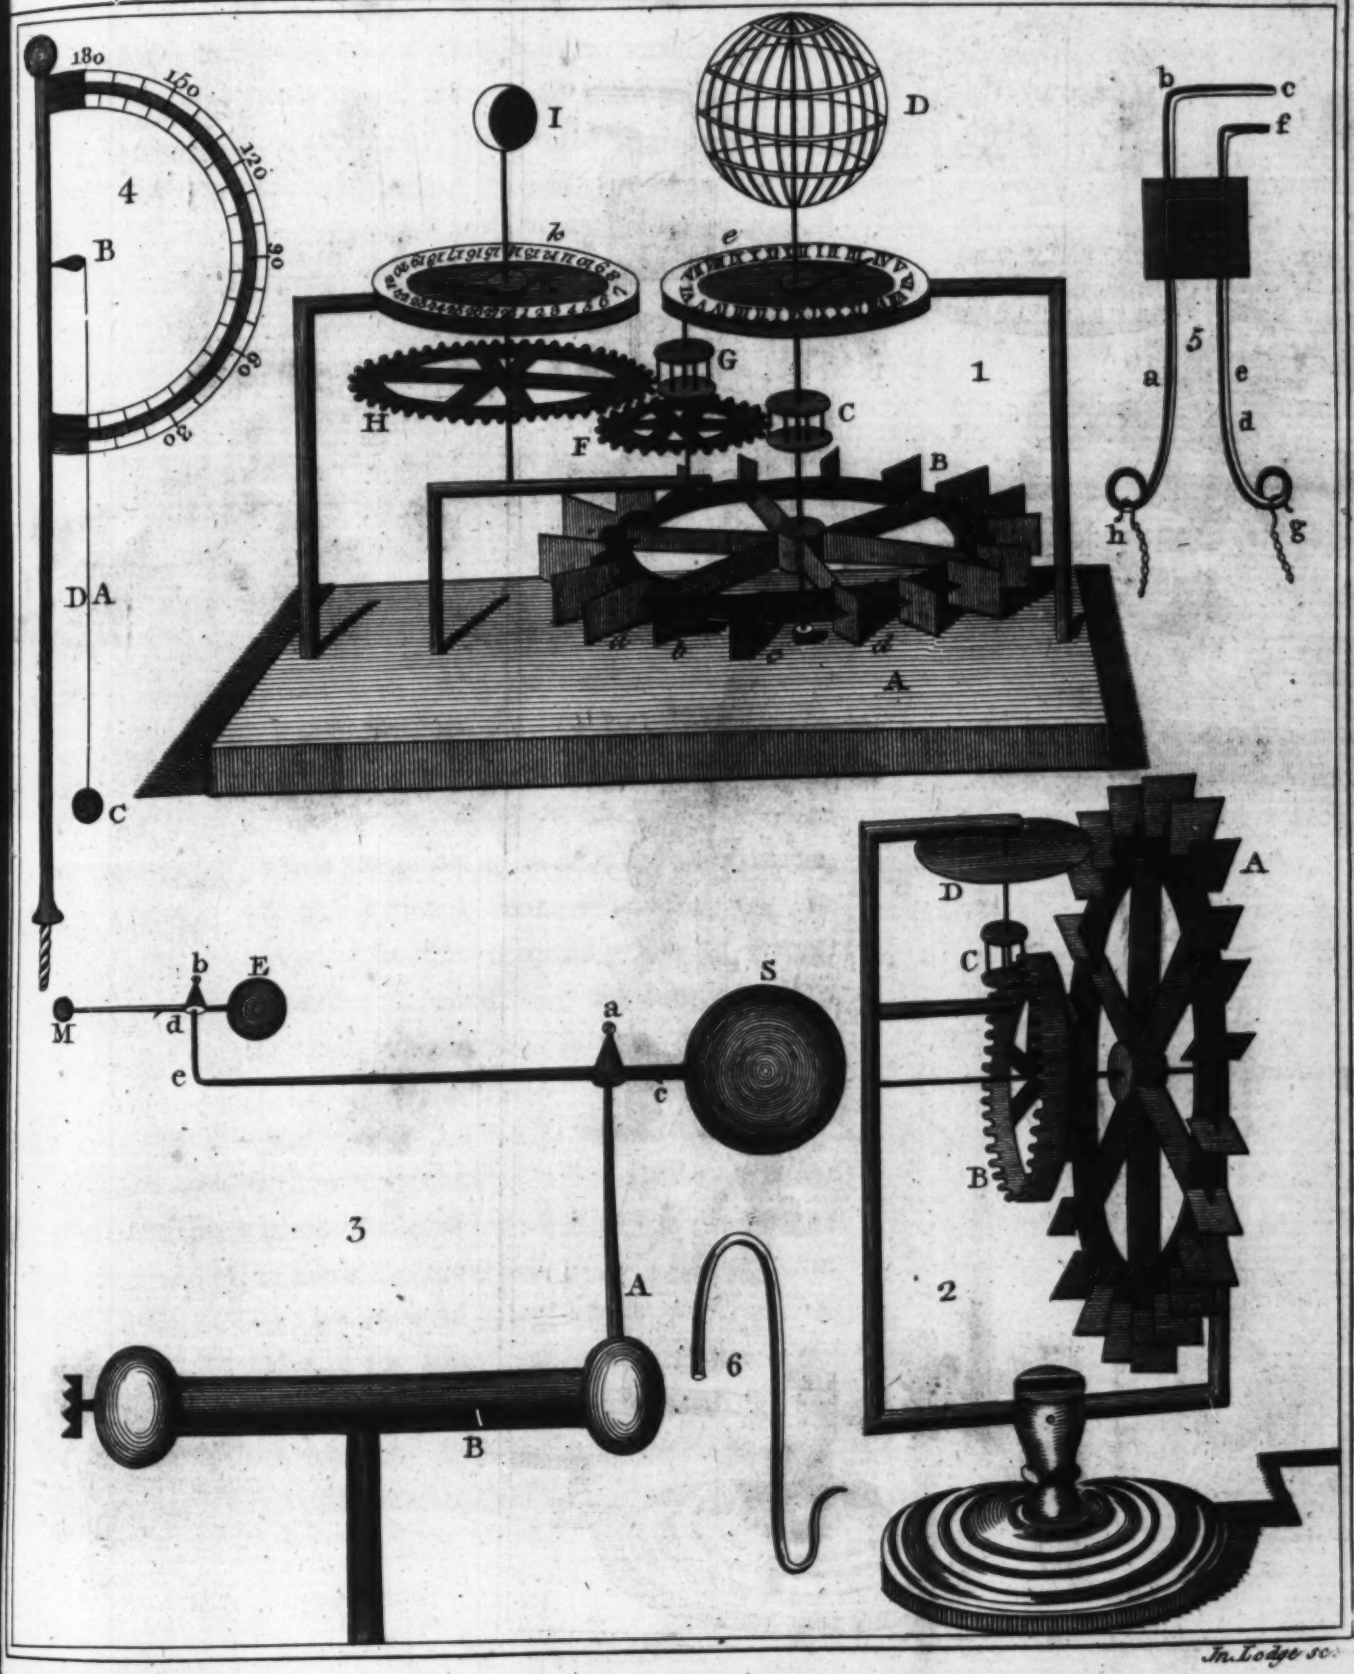

180
150
120
90
60
30
4
B
C
DA
I
D
k
e
G
H
F
C
B
A
1
b
c
f
5
a
e
d
h
g
M
b
E
d
e
a
S
c
3
A
B
6
D
C
A
B
2
Jn. Lodge sc.

Fig. 9.



Fig.
Plate

the wheel according to the order of the letters a b c d. On the axis of this wheel is a trundle C, of eight ſtaves, for turning the wheel F, of thirty-two teeth, on whoſe axis is a trundle G, of eight ſtaves, for turning the wheel H, of fifty-nine teeth, which will go once round in the time the great wheel A goes twenty-nine and a half. A little hollow globe D, repreſenting the earth, with its meridians, equator, tropics, polar circles, and poles, is put upon the top of the axis of the great wheel A, and on the ſame axis is an index E, which goes round a ſmall dial-plate e of twenty-four hours, in the time that the earth D turns round. And an ivory ball I is placed on the top of the axis of the wheel H, half black, half white, to repreſent the moon; below which, on the ſame axis, is an index K, which goes round a ſmall plate k divided into twenty-nine and a half equal parts, for the days of the moon's age from change to change. So that, in the time the great wheel A, the earth D, and hour-index E, make twenty-nine and a half revolutions, the moon I and her index K make only one; and in that time, by ſhewing herſelf all round to the obſervers, they ſee all her different phaſes or appearances, like thoſe of the real moon in the heavens.

Having ſet the orrery near the prime conductor, place a crooked wire from the conductor, ſo as its point may be even with the great wheel B, and tend to turn it in the direction a b c d; turn the glaſs globe of the electrical machine by the winch, and a ſtream of fire will iſſue from the wire to the wheel, and turn the whole of the moveable work; by which means, the earth D will be turned round its axis, from weſt-by-ſouth to eaſt: and, in ſuch turn of the earth, the index E will go round Experiment XI.

all the twenty-four hours on the dial plate e. In the time the earth and index turn 29½ times round, the moon I, will turn once round her axis, ſhewing all her various phaſes; and the index K will go over all the 29½ days of the moon's age on the plate K.

A Model of a Water-Mill turned by a Stream of Electric Fire.

Fig. 2. A MODEL of a common mill for grinding corn. A is a water-wheel, B the cog-wheel on its axis, C the trundle turned by that wheel, and D the running mill-ſtone on the top of the axis of the trundle. It may eaſily be contrived and turned alſo by electricity, if inſtead of the round plate D for the mill-ſtone, there be a horizontal wheel on the axis of the trundle C with ſpur-cogs, which will turn two trundles placed on its oppoſite ſides; and on the top of each of theſe trundles axis, may be a round plate repreſenting a mill-ſtone; ſo that this model has all the working parts of a double water-mill, turning two mill-ſtones.

Experiment XII. Set the mill near the prime conductor, and place the crooked wire ſo as its point may be directed toward the uppermoſt ſide of the great wheel A. Then turn the glaſs globe by the winch, and the ſtream of fire that iſſues from the point of the wire will turn the wheel; and conſequently all the other working parts of the mill.

Another Electrical Orrery, ſhewing the Motion of the Sun, Earth, and Moon.

Fig. 3. THE ſun and earth go round the common center of gravity between them in a ſolar year; and the earth and moon go round the common center of gravity between them

them in a lunar month. Theſe motions are repreſented by an electrical experiment as follows:

The ball S repreſents the ſun, E the earth, and M the moon, connected by wires a c and b d: a is the center of gravity between the ſun and earth, and b is the center of gravity between the earth and moon. Theſe three balls and their connecting wires, are hung and ſupported on the ſharp point of a wire A, which is ſtuck upright in the prime conductor B of the electrical machine; the earth and moon hanging upon the ſharp point of the wire c a e, in which wire is a pointed ſhort pin, ſticking out horizontally at c; and there is juſt ſuch another pin at d, ſticking out in the ſame manner, in the wire that connects the earth and the moon.

Experiment XIII.

When the globe of the electrical machine is turned, the above-mentioned balls and wires are electrified: and the electrical fire, flying off horizontally from the point c and d, cauſe S and E to move round their common center of gravity a; and A and M to move round their common center of gravity b. And as E and M are light when compared with S and E, there is much leſs friction on the point b than upon the point a; ſo that E and M will make many more revolutions about the point b, than S and E make about the point a. The weights of the balls may be adjuſted ſo, that E and M may go twelve times round b in the time that S and E go once round a. It makes a good amuſing experiment in electricity; but it is ſo far from proving that the motions of the planets in the heavens are owing to a like cauſe, that it plainly proves they are not:—for the real ſun and planets are not connected by wires or bars of metal; and conſequently there can be no ſuch metallic points as c and d between

between them. And without ſuch points, the electric fluid would never cauſe them to move: for, take away theſe points in the above mentioned experiment, and the balls will continue at reſt, let them be ever ſo ſtrongly electrified.

The Electrified Capillary Syphon.

Fig. 6. LET a ſmall bucket of metal, full of water, be ſuſpended from the prime conductor, and put in it a glaſs ſyphon, of ſo narrow extremity as the water will juſt drop from it. If in this diſpoſition of the apparatus the winch of the machine be turned, the water which, when not electrified, only dropt from the extremity of the ſyphon, will now run in a full ſtream, which will even be ſubdivided into other ſmaller ſtreams; and if the experiment be made in the dark, it will be beautifully illuminated, and like a fountain with ſtreams of fire; which may be made to ſtop apparently by the word of command, by touching the prime conductor.

The Quadrant Electrometer.

Fig. 4. The only inſtrument that can with propriety be called an electrometer; that is, ſuch as meaſures the preciſe degree to which any body is electrified, is as follows: A is a very light rod, that turns on the center of a ſemicircle B, ſo as always to keep pretty near its graduated limb: at the extremity of the rod is a cork ball C. D is the pillar that ſupports the rod, and may be either fixed to the prime conductor, or let into the braſs knob of a

jar

jar or battery, or be ſet on a ſtand to ſupport itſelf. The whole inſtrument may be made of wood or ivory; but is found moſt perfect when the pillar and rod, or index, are of box, made very ſmooth with emery paper: the ball of cork, and the ſemicircle ivory, as the diviſions on that are more legible than on wood.

The moment this inſtrument begins to be electrified, the rod is repelled by the pillar, and conſequently begins to move over the edge of the ſemicircle, and ſhews, to the greateſt preciſion, the degree to which the prime conductor is electrified; or how high any jar or battery is charged. As the materials of which this inſtrument is made are very imperfect conductors, it will very rarely diſſipate any of the electricity of the prime conductor, &c. with which it is connected: but if it be found, by a trial in the dark, that any part of it collects the electric matter, it muſt be placed before the fire to dry off the damp, particularly from the index; it ſhould not however be much heated, for then it will not receive the electricity ready enough, and the motion of the index will not anſwer with ſufficient accuracy to the degree of electricity in the body with which it is in contact: but this inconvenience may be eaſily remedied by moiſtening the pillar and the index; for the ſemicircle can never be too dry.

It is evident, from the conſtruction of this inſtrument, that the force of different exploſions may be aſcertained by it, before the diſcharge, with the greateſt accuracy. If a jar be charged with poſitive electricity, and you want to know the preciſe time, while you are attempting to charge it negatively, that it becomes diſcharged, watch the moment the index comes to the perpendicular ſtation, which may be obſerved without the leaſt danger

of

of a miſtake, and you will then find there is not the leaſt ſpark left in the jar. If you continue the operation, the index will begin to advance again; and thereby ſhew the exact quantity of the oppoſite electricity the jar has acquired.

A very uſeful Inſtrument to cure the Tooth-Ach.

Fig 5. THE inſtrument A is a flat ſquare piece of box-wood, about an inch broad, and a quarter of an inch thick: two longitudinal holes are made quite through it, near its oppoſite edges, through which the braſs wires a b c and d e f are put while they are ſtraight; then fixed with ſealing-wax, and bent as in the figure, ſo as to receive the tooth and gum between their points c and f, which muſt not be made too ſharp for fear of hurting the gum. When it is uſed, two chains g and h muſt be hooked to the other ends of the wires, and holding it on the gum, with the tooth between the ends of c and f of the wires a b c and d e f, hook the chains g and h on the other ends of theſe wires; put the other end of a chain g round the bottom of a jar, and cauſe an aſſiſtant to hold the chain h, hanging down from his hand; the chains not touching one another, and both of them clear of the table. Then having charged the jar, deſire the aſſiſtant to ſtrike the prime conductor with the looſe end of the chain h; this will diſcharge the jar, and give the perſon a ſhock, which will be felt only in the tooth and gum that is taken in between the wires at c and f.

Practical

Practical Rules concerning the Use of the Electrical Apparatus, and the performing of Experiments.

IT often happens that young electricians are at a loss to assign the reason why some experiments do not succeed with them, as described in the Treatises on Electricity. Sometimes they are in possession of very good instruments; but by reason of some circumstance or other, unattended to, they are quite useless in their hands. This indeed can be remedied by nothing but practice; and it is by long use that the electrician, as well as the practitioner in any art or science, becomes so good an operator, as to use his instruments to the best advantage. A few rules are however very necessary to guide him in his operations; and although these alone are insufficient to make a person a complete practical electrician, yet, when accompanied with the actual management of the apparatus, they facilitate the use of it, and render the performance of the experiments more accurate and expeditious.

The first thing that the young electrician should observe, is, the preservation and care of his instruments. The electrical machine, the coated jars, and in short, every part of the electrical apparatus, should be kept clean, and as free as possible from dust and moisture.

When the weather is clear, and the air dry, especially in clear and frosty weather, the electrical machine will always work well: But when the weather is very hot, the machine is not so powerful; nor in damp weather,

except it be brought into a warm room, and the cylinder, the ſtands, the jars, &c. be made thoroughly dry.

Before the machine is uſed, the cylinder ſhould be firſt wiped very clean with a ſoft linen cloth that is dry, clean, and warm; and afterwards with a clean hot flannel, or an old ſilk handkerchief; this done, apply a little amalgam, and turn the winch, and it will ſoon be perceived that the electric fluid will come like a wind from the cylinder to the knuckle; and, if the motion be a little continued, ſparks and crackling will ſoon follow. This indicates that the machine is in good order; and the electrician may proceed to perform his experiments. But if, when the winch is turned for ſome time, no wind is felt upon the knuckle, then the fault is, very likely, in the rubber; and to remedy that, uſe the following directions: By unſcrewing the ſcrews on the back of the rubber, remove it from its glaſs pillar, and keep it a little near the fire, ſo that its ſilk part may be dried: take now a piece of dry mutton ſuet, or a little tallow from the candle, and juſt paſs it over the leather of the rubber, and then the machine cannot fail but be fit for uſe.

Sometimes the machine will not work well, becauſe the rubber is not ſufficiently ſupplied with electric fluid; which happens when the table upon which the machine ſtands, and to which the chain of the rubber is connected, is very dry, and conſequently in a bad conducting ſtate. Even the floor and the walls of the room are, in very dry weather, bad conductors, and they cannot ſupply the rubber ſufficiently. In this caſe the beſt expedient is, to connect the chain of the rubber by means of a long wire, with ſome moiſt ground, or with the iron-work of a water-pump; by which means the rubber

ber will be ſupplied with as much electric fluid as is required.

When a ſufficient quantity of amalgam has been accumulated upon the leather of the rubber, and the machine does not work very well, then, inſtead of putting more amalgam, it will be ſufficient to take the rubber off, and to ſcrape a little off that which is already upon the leather.

It will be often obſerved, that the globe or cylinder, after being uſed ſome time, contracts ſome black ſpots, occaſioned by the amalgam, or ſome foulneſs of the rubber, which grow continually larger, and greatly obſtruct its electric power. Theſe ſpots muſt be carefully taken off, and the cylinder muſt be frequently wiped, in order to prevent its contracting them.

In charging electric jars in general, it muſt be obſerved, that every machine will not charge them equally high. That machine whoſe electric power is the ſtrongeſt, will always charge the jars higheſt. If the coated jars, before they are uſed, be made a little warm, they will receive, and hold the charge the better.

If ſeveral jars are connected together, among which there is one that is apt to diſcharge itſelf very ſoon, then the other jars will alſo be ſoon diſcharged with that; although they may be capable of holding a very great charge by themſelves. When electric jars are to be diſcharged, the electrician muſt be cautious leſt, by ſome circumſtance not adverted to, the ſhock ſhould paſs through any part of his body; for an unexpected ſhock, though not very ſtrong, may occaſion ſeveral diſagreeable accidents. In making the diſcharge, care

except it be brought into a warm room, and the cylinder, the ſtands, the jars, &c. be made thoroughly dry.

Before the machine is uſed, the cylinder ſhould be firſt wiped very clean with a ſoft linen cloth that is dry, clean, and warm; and afterwards with a clean hot flannel, or an old ſilk handkerchief; this done, apply a little amalgam, and turn the winch, and it will ſoon be perceived that the electric fluid will come like a wind from the cylinder to the knuckle; and, if the motion be a little continued, ſparks and crackling will ſoon follow. This indicates that the machine is in good order; and the electrician may proceed to perform his experiments. But if, when the winch is turned for ſome time, no wind is felt upon the knuckle, then the fault is, very likely, in the rubber; and to remedy that, uſe the following directions: By unſcrewing the ſcrews on the back of the rubber, remove it from its glaſs pillar, and keep it a little near the fire, ſo that its ſilk part may be dried: take now a piece of dry mutton ſuet, or a little tallow from the candle, and juſt paſs it over the leather of the rubber, and then the machine cannot fail but be fit for uſe.

Sometimes the machine will not work well, becauſe the rubber is not ſufficiently ſupplied with electric fluid; which happens when the table upon which the machine ſtands, and to which the chain of the rubber is connected, is very dry, and conſequently in a bad conducting ſtate. Even the floor and the walls of the room are, in very dry weather, bad conductors, and they cannot ſupply the rubber ſufficiently. In this caſe the beſt expedient is, to connect the chain of the rubber by means of a long wire, with ſome moiſt ground, or with the iron-work of a water-pump; by which means the rubber

ber will be ſupplied with as much electric fluid as is required.

When a ſufficient quantity of amalgam has been accumulated upon the leather of the rubber, and the machine does not work very well, then, inſtead of putting more amalgam, it will be ſufficient to take the rubber off, and to ſcrape a little off that which is already upon the leather.

It will be often obſerved, that the globe or cylinder, after being uſed ſome time, contracts ſome black ſpots, occaſioned by the amalgam, or ſome foulneſs of the rubber, which grow continually larger, and greatly obſtruct its electric power. Theſe ſpots muſt be carefully taken off, and the cylinder muſt be frequently wiped, in order to prevent its contracting them.

In charging electric jars in general, it muſt be obſerved, that every machine will not charge them equally high. That machine whoſe electric power is the ſtrongeſt, will always charge the jars higheſt. If the coated jars, before they are uſed, be made a little warm, they will receive, and hold the charge the better.


If ſeveral jars are connected together, among which there is one that is apt to diſcharge itſelf very ſoon, then the other jars will alſo be ſoon diſcharged with that; although they may be capable of holding a very great charge by themſelves. When electric jars are to be diſcharged, the electrician muſt be cautious leſt, by ſome circumſtance not adverted to, the ſhock ſhould paſs through any part of his body; for an unexpected ſhock, though not very ſtrong, may occaſion ſeveral diſagreeable accidents. In making the diſcharge, care

muſt be taken that the diſcharging rod be not placed on the thinneſt part of the glaſs; for that may cauſe the burſting of the jar.

When a large battery is diſcharged, jars will be often found broken in it, which burſt at the time of the diſcharge. To remedy this inconvenience take this method; which is, Never to diſcharge the battery through a good conductor, except the circuit be at leaſt five feet long. Mr. Nairne ſays, that ever ſince he made uſe of this precaution, he has diſcharged a very large battery near a hundred times, without ever breaking a ſingle jar; whereas before, he was continually breaking them. But here it muſt be conſidered, that the length of the circuit weakens the force of the ſhock proportionably; the higheſt degree of which is in many experiments required.

It is adviſeable when a jar, and eſpecially a battery, has been diſcharged, not to touch its wires with the hand before the diſcharging rod be applied to its ſides a ſecond, and even a third time; as there generally remains a reſiduum of the charge: this reſiduum is occaſioned by the electricity, that, when the jar is charging, ſpreads itſelf over the uncoated part of the glaſs near the coating, which will not be diſcharged at firſt, but gradually returns to the coating after the firſt diſcharge, which is ſometimes very conſiderable.

When any experiment is to be performed, which requires but a ſmall part of the apparatus, the remaining part of it ſhould be placed at a diſtance from the machine, the prime conductor, and even from the table, if that is not very large. Candles, particularly, ſhould be placed

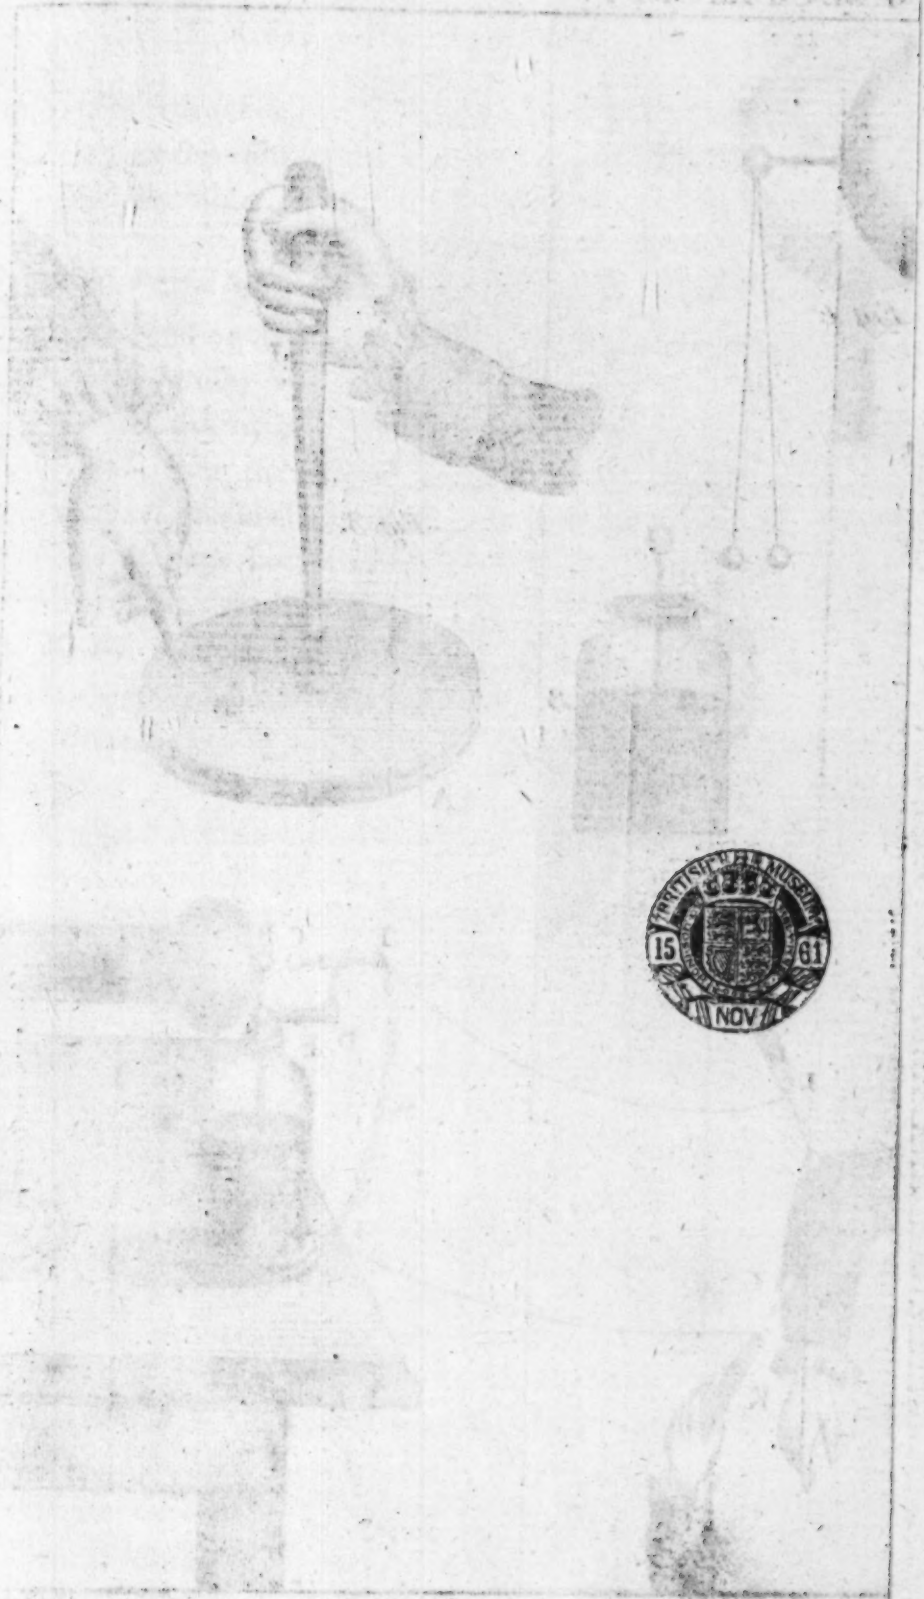

BRITISH MUSEUM
15 61
NOV

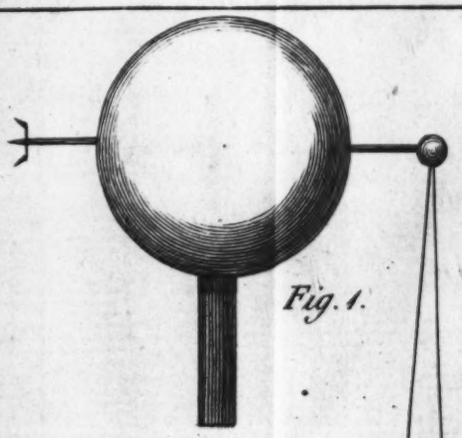


Fig. 1.



Fig. 3.



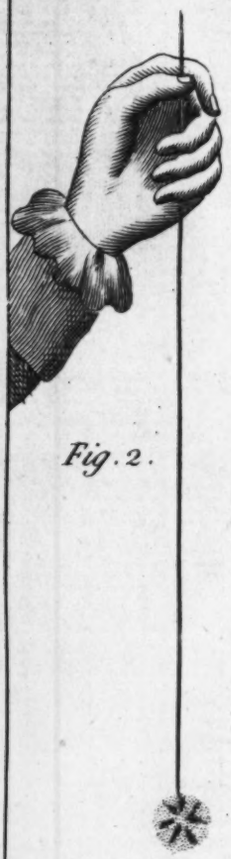


Fig. 2.

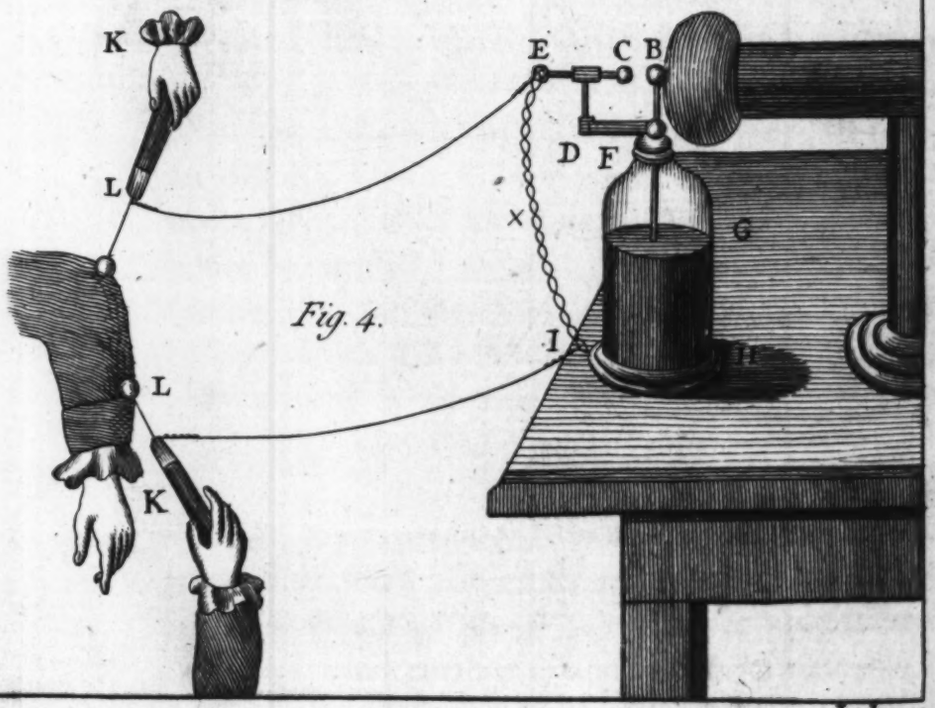


Fig. 4.

Lodge sc

placed at a conſiderable diſtance from the prime conductor; for the effluvia of their flames carry off much of the electric fluid.

Laſtly, The young electrician ſhould be cautioned not to depend on firſt appearances in electricity. A new phenomenon may juſtly excite his curioſity: it is laudable to remark it, and to purſue the hint; but at the ſame time even the doubtful aſſertion of a new fact ſhould never be made, till after a number of ſimilar and concurring experiments. Electricity is a ſcience that often deceives the ſenſes; and the moſt experienced electrician frequently finds himſelf miſtaken in things, which perhaps he may have before conſidered as the moſt certain.

In many electrical experiments, it is very convenient to have a method of determining, whether a ſmall degree of electricity be poſitive or negative; and in uſing large batteries, it is a matter of conſequence to know how the charge advances, and of what ſtrength it is. Mr. Canton's balls are extremely uſeful for both theſe purpoſes. They are made of the pith of elder, turned perfectly globular, and ſuſpended from the conductor by fine threads. Plate VI. Fig. 1.

To underſtand the uſe of them, ſuppoſe a jar or battery ſtands upon the table, and I want to know whether the inſide be charged poſitively or negatively. In order to this, I preſent the balls, and they are immediately attracted by the wire, and diverge from one another. This is common to both electricities; and the greater the diſtance to which the balls ſeparate, and the farther they repel one another, the higher is the charge. To determine

mine of what kind it is, I rub a ſmall piece of glaſs (which I carry about me for the purpoſe) againſt my hand or coat, which I know will excite it poſitively, and then preſent it to the balls in their diverging ſtate. If it makes the balls converge, and conſequently avoid the glaſs, it ſhews that they are electrified poſitively, as well as the glaſs. On the contrary, if it increaſe their divergency, and attract them, it ſhews their electricity to be of a kind oppoſite to that of the glaſs; that is, negative. And it muſt be remembered, that the electricity of the balls (which do not touch, or receive any electricity from the wires of the jar or battery) is always contrary to that with which they are charged; for all bodies placed within the influence of electrified bodies, are affected with the contrary electricity.

In order to aſcertain the kind of an exceeding ſmall degree of electricity, it will be convenient to have a very light body; as a piece of downy feather hanging by a ſilken thread. This light body, when it is once electrified, either poſitively or negatively, will retain its virtue a long time, with very little loſs. If then any body (the electricity of which is unknown) be brought to it, the feather will be repelled by it, if it be of the ſame kind with its own, and attracted if it be the contrary to it. The ſilk, by which it is ſuſpended, ſhould be a ſingle thread, as it comes from the worm; or at leaſt a very few of thoſe threads; and the whole ſhould be as light as poſſible.

The Electrophorus.

IT conſiſts of two plates, A and B, made of a circular form, from ſix to eighteen inches diameter, or upwards. The upper plate is generally made of braſs; but a tin plate, with a wire turned in upon its edge, will anſwer

exceeding

exceeding well. At the center of this plate there is a ſocket o, in which a glaſs handle I (nine or ten inches long) is fixed. A thin board, covered with tin-foil and ſuſpended by ſilken ſtrings, will anſwer well, when the electrophorus is wanted of a large diameter.

The under plate may be made of glaſs, ſealing-wax, or of the following compoſition, viz. Four parts roſin, three parts pitch, three parts ſhel-lac, two parts Venice-turpentine, melted together over a gentle fire. It may be poured and ſpread upon a thin linen cloth about one-fourth of an inch thick. The linen cloth muſt be ſtretched upon a hoop, and made as tight as poſſible. If the ſurface be a little rough, it will be no worſe.

The manner of uſing this machine is as follows: — Rub the coated ſide of the under plate A with new fine flannel, or a hare or cat's ſkin; and when it is excited as much as poſſible, ſet it on a table, and place the upper plate upon it, and put your finger on the upper plate: then take your finger off and take hold of the top of the glaſs handle I, and apply it to the knob of a coated jar. Repeat this operation for 30 or 40 times, and the jar will become charged.

Mr. Cavallo mentions one of the above kind which he made, with which he charged a coated phial ſeveral times (by once exciting) ſo ſtrong as to pierce a hole through a card at every diſcharge.

When a glaſs is coated with ſealing-wax, after it is excited and laid with the waxed ſide downward, and the glaſs uppermoſt, then on making the uſual experiment of putting the metal plate on it, and taking the ſpark, &c.

&c. it will be attended with contrary electricity to what it had before.

Medical Electricity.

BEFORE we conclude the ſubject, it will be neceſſary to give ſome rules, in order to explain a few practical experiments of applying medical electricity: and firſt, It ſhould be attentively obſerved, to apply the ſmalleſt force of electricity, which may be ſufficient to remove or alleviate any diſorder. The chief difficulty conſiſts in diſtinguiſhing the proper ſtrength of the electric power that is required for a given diſorder. The ſex and condition of the patient muſt be duly conſidered; and, in regard to this point, it is impoſſible to give any exact and invariable rules; the circumſtances being of ſuch a nature, and ſo various, that long experience, and a ſtrict attention to every particular phenomenon, are the only means by which proper inſtructions may be received. The ſureſt rule that can be given relating to this particular, is to begin with the moſt gentle treatment; at leaſt ſuch that, conſidering the conſtitution of the patient, may be thought rather weak than ſtrong. When this gentle treatment has been found ineffectual for a few days, which is denoted by the diſeaſe not abating, and the application of electricity not cauſing any material alteration, then the operator may gradually increaſe the force of electricity until he finds the proper degree of it.

In judging of caſes proper to be electrified, experience ſhews, that in general, all kinds of obſtructions, whether of motion, of circulation, or of ſecretion, are very often removed or alleviated by electricity. The ſame may alſo

alſo be ſaid of nervous diſorders; both which include a great variety of diſeaſes. The application of electricity has alſo been found very beneficial in diſeaſes of a long ſtanding. It has likewiſe been found a powerful remedy in muſcular contractions. But when any limb of the body is deprived of motion, it muſt be obſerved, that the deprivation of motion is not always originated by a contraction of the muſcles; but that it is often occaſioned by a relaxation: thus, for inſtance, If the hand is bent inwardly, and the patient has no power of ſtraightening it, the cauſe of it may be a weakneſs of the outward muſcles, as well as a contraction of the inward ones. In ſuch caſes it is often difficult, even for good anatomiſts to diſcover the real cauſe; but the ſureſt method is to electrify, not only thoſe muſcles which are ſuppoſed to be contracted, but alſo their antagoniſts; for to electrify a ſound muſcle is by no means hurtful.

Rheumatic diſorders, even of long ſtanding, are relieved, and generally quite cured, by only drawing the electric fluid with a point from the part, or by drawing ſparks from the conductor: the operation ſhould be continued for about four or five minutes, repeating it once or twice every day. When ſtrong ſhocks are adminiſtered, their greateſt number ſhould not exceed a dozen or fourteen, except when they are to be given to the whole body in different directions.

The inſtruments which, beſides the electrical machine and its prime conductor, are neceſſary for the adminiſtration of medical electricity, may be reduced to three, viz. an electric jar, with Mr. Lane's electrometer;

an inſulated chair, or an inſulated ſtool, upon which a common chair may be occaſionally ſet, and the directors.

Fig. 4. Repreſents the electric jar, with Mr. Lane's electrometer, and the manner in which the ſhocks are ſent thro' any part of the body. The ſurface of the jar, which is coated with tinfoil, ſhould be about four inches in diameter, and ſix inches high, which is equal to about ſeventy-three ſquare inches. The braſs wire, which paſſes thro' the covering of the jar, and touches the inſide coating, has a braſs ball F, to which the electrometer FDE is faſtened: and proceeding a little farther up, terminates in another braſs ball B, which ſhould be ſo high as to touch the prime conductor A, which is ſuppoſed to ſtand before the electrical machine. The electrometer conſiſts in a glaſs ſtick, F D, cemented to two braſs caps, F and D; from the latter of which a ſtrong perpendicular braſs wire proceeds, the extremity of which comes as high as the center of the ball B, and is furniſhed with an horizontal ſpring ſocket, through which the wire C E, having the braſs ball C at one end, and the open ring E at the other, may be ſlided backwards and forwards, ſo as to ſet the braſs ball C at any required diſtance from the ball B. This diſtance, at moſt, need not be greater than half an inch; hence the electrometer may be made very ſmall. Sometimes ſmall diviſions are marked upon the wire C E, which ſerve to ſet the balls B and C at a given diſtance from one another with more readineſs and preciſion. Now, ſuppoſe that the jar is ſet contiguous to the prime conductor; that is, with the ball B touching the conductor; that the ball C be ſet at 1-10th of an inch diſtant from the ball B; and that, by means of a chain, a conducting communication be formed from E to the outſide coating of the jar, by a

chain

chain x. In this caſe, if the electrical machine be put in motion, the jar will be charged; and when the charge is ſo high as that the electric fluid accumulated within the jar can leap from the ball B to C, which we have ſuppoſed to be 1-10th of an inch aſunder, the diſcharge will happen, and a ſpark appear between the ſaid balls, and the ſhock paſſes through the chain x: for the part F D of the electrometer being of glaſs, generally covered with ſealing-wax, is impervious to electricity, conſequently the electric fluid has no other way through which it can paſs from the inſide to the outſide of the glaſs jar. When the ſhocks are to be given with this apparatus to any particular part of the body (for inſtance, to the arm) then, inſtead of the chain x, which muſt now be taken away, two ſlender and pliable wires, EL, IL, are to be faſtened, one to the open ring E of the electrometer, and to the braſs hook I of the ſtand H I, which communicates with the outſide coating of the jar. If the jar has not the ſtand H I, the extremity I of the wire I L may be ſimply reſted under, or may be tied round it. In ſhort, it muſt be put in contact with the outſide coating of the jar, in any convenient manner. The other extremities of the ſaid wires are faſtened each to the braſs wires L, and L of the directors K L, K L. Each of thoſe inſtruments, juſtly called directors, conſiſts of a knobbed braſs wire L, which by means of a braſs cap is cemented to the glaſs handle K. The operator, holding them by the extremity of the glaſs handle, brings their balls into contact with the extremities of that part of the body of the patient through which he deſires to ſend the ſhock. The management and convenience of this apparatus are eaſily comprehended by inſpecting the figure; for when the machine is in motion, and the apparatus, &c. is ſituated as in the figure,

the diſcharge of the jar muſt be evidently made through that part of the patient's arm which lies between the knobs of the directors; and the operator, whilſt an aſſiſtant keeps the machine in motion, has nothing more to do but to hold the knobs of the directors to the extremities of the arm, or to any other part of the body that is required to be thus electrified; always taking care that the two wires E L, I L, do not touch each other, becauſe in that caſe the ſhock will not paſs through that part of the body which is required to be electrified. Thus any number of ſhocks, preciſely of the ſame ſtrength, may be given, without altering any part of the apparatus, or having any farther trouble: and when the ſtrength of the ſhocks is required to be diminiſhed or increaſed, it is only neceſſary to diminiſh or augment the diſtance between the balls B C; which is done by ſlipping the wire C E forwards or backwards through the ſpring ſocket that holds it.

It is almoſt needleſs to mention, that when ſhocks are adminiſtered, it is immaterial whether the patient ſtands upon the ground, upon the inſulating ſtool, or in any other ſituation whatever. Neither is it always neceſſary to remove the clothes from the part that is to be electrified, in order to let the knobs of the directors touch the ſkin; for, except the coverings be too many and too thick, in which caſe part of them at leaſt ſhould be removed, the ſhocks will go through them very eaſily, eſpecially if the knobs of the directors be preſſed a little upon the part.

Of the Technical Terms uſed by Writers on the Subject of Electricity.

BATTERY, *electrical*, a number of jars combined together, ſo that they may be all charged and diſcharged at the ſame time. The form of one is exhibited, Fig. 12. Plate III.

Charging, throwing an additional quantity of electric matter upon one ſide of a plate of glaſs, or a jar, while the other ſide is exhauſted in the ſame proportion. All other electric ſubſtances are capable of being charged as well as glaſs.

Circuit, electric, thoſe conducting ſubſtances which are made uſe of to form a communication between the two coatings of a charged jar or battery, &c. and through which the electric matter muſt paſs, when the equilibrium between the two ſides is reſtored by the diſcharge.

Coatings, plates of metal, or other conducting ſubſtances, laid upon plates of glaſs, or other electrics, whereby the additional quantity of electric matter, called *the charge*, may be the more eaſily and uniformly conveyed to them, or diſcharged from them.

Conductor, prime, a piece of metal furniſhed with points, to receive electric matter from the globe, after it has been excited by friction. It muſt always be inſulated, or cut off from a communication with the earth by means of electric ſubſtances, ſuch as *glaſs*, *baked wood*, &c.

&c. Whenever *the conductor* is mentioned, the prime conductor muſt alſo be underſtood.

Conductors, or *conducting ſubſtances*, thoſe bodies thro' which the electric matter may be tranſmitted. They are alſo called non-electrics, becauſe no electric powers can be excited in them by friction.

Diſcharging, reſtoring the equilibrium of the electric fluid, after it has been diſturbed by charging. It is effected by forming a communication between the overloaded and the exhauſted ſide of a glaſs jar, battery, &c. by means of conducting ſubſtances, through which the overplus or charge may paſs from the one to the other. When the diſcharge is conſiderable, it is often called an *exploſion*.

Diſcharging rod, a braſs rod, with a knob at each end, very convenient either for taking ſparks from the prime conductor, or for diſcharging jars or batteries. It is ſometimes bent into a ſemicircular form, in order to bring one of the knobs to the outſide, and the other to the wire, communicating with the inſide of a charged jar, in order to diſcharge it, by receiving the exploſion on the knob.

Electric matter, that ſubtle fluid which is ſuppoſed to be the cauſe of all thoſe appearances which are termed electric. It is ſometimes called *electric fire*, and ſometimes *ether*.

Electrics, thoſe bodies in which electric powers of attraction, repulſion, &c. may be excited by friction. They are alſo called *non-conductors*, becauſe the electric matter cannot paſs through them.

Electrometers,

Electrometers, inſtruments to meaſure the degree of electrification; that is, the quantity of electric matter thrown upon any body, or the force of an electrical exploſion.

Excitation, the act of exciting or calling forth electric powers from electric ſubſtances, by means of friction, and other methods.

Inſulating, placing bodies where they are not in contact with any conducting ſubſtance; as by ſuſpending them in the air by ſilken ſtrings, putting them on glaſs ſtands, &c. ſo that the electricity they may be charged with cannot be conveyed to the earth.

Negative Electricity, a leſs quantity of the electric matter than is natural to any body.

Pencil, the appearance of electric light iſſuing from the point of a body electrified poſitively.

Poſitive Electricity, a quantity of electric matter thrown upon any body, above its natural ſhare.

Rubber, or cuſhion, a piece of leather, or any other ſubſtance againſt which the glaſs globe, or other electric body whirled in the machine, is rubbed, in order to excite them.

Shock, electric, the convulſion given to the animal muſcles by the paſſage of the electric matter through them, eſpecially in the diſcharging of a jar or battery.

Star, the appearance of electric light from the point of a body electrified negatively.

Wire of a phial, a jar, or battery, the wire or metal rod which goes into the phial, and which touches the inside coating. This wire is therefore often put for the inside coating.

Two Methods to make Amalgam.

FIRST, take ſpelter four ounces, and diſſolve it in an iron ladle over a fire; let it cool a little, but not ſo as to become quite ſtiff: add to it, while in that ſtate, ſix ounces of mercury, and ſtir them well up together; then turn it out of the ladle upon a ſmooth ſtone, and grind it with a muller till it becomes like fine tough paſte; which put into a box, and it is ready for uſe. If it ſhould become too hard, grind it again with a little more mercury: the addition of a little tallow may be occaſionally added.

The Second Method.

TAKE of tin one pound; flour of ſulphur ſeven ounces; ſal ammoniac and purified quickſilver, of each half a pound.

Melt the tin by itſelf, add to it the quickſilver, and when the mixture is grown cold reduce it into powder: mix this with the ſulphur and ſal ammoniac, and ſublimate it in a matraſs: the moſaic gold will be found under the ſublimated matter, with ſome droſs at the bottom. This is thought as powerful an amalgam as the former.

A Com-

A Compoſition for lining the Inſide of Globes or Cylinders.

TAKE four parts of Venice turpentine, one part of roſin, and one of bees-wax, boil the whole over a gentle fire for two hours, and it is fit for uſe. When a globe or cylinder is to be lined, it muſt be put into an oven, with a ſufficient quantity of the compoſition, broken, and put in the inſide, and when it is melted it muſt be turned round every way, in order to ſpread it all over equally. This lining has been found to increaſe the electric power amazingly. Mr. Prieſtly uſed linſeed oil and roſin in the ſame manner as above directed, the proportion was equal parts of each, boiled very well together.

A Varniſh for all the Parts of the Machine which are inſulated.

TAKE ſpirits of wine, highly rectified, and in it diſſolve the beſt ſealing-wax to a tolerable ſtiff conſiſtence, with which varniſh over all your glaſs pillars, to keep off the moiſture they attract from damp air.

PNEUMATICS.

PNEUMATICS is that branch of natural philoſophy which treats of the nature, weight, preſſure, and elaſticity of air, and the effects ariſing therefrom.

Of the Properties of the Air.

THE air is that thin tranſparent fluid in which we live and breathe. It encompaſſes the whole earth to a conſiderable height; and, together with the clouds and vapours that float in it, it is called the *atmoſphere*. The air is juſtly reckoned among the number of fluids, becauſe it has all the properties by which a fluid is diſtinguiſhed; for, it yields to the leaſt force impreſſed, its parts are eaſily moved among one another, it preſſes according to its perpendicular height, and its preſſure is every way equal.

That the air is a fluid conſiſting of ſuch particles as have no coheſion betwixt them, but eaſily glide over one another and yield to the ſlighteſt impreſſion, appears from that eaſe and freedom with which animals breathe

in

in it, and move through it without any difficulty or ſenſible reſiſtance.

But it differs from all other fluids, in the four following particulars: 1. It can be compreſſed into a much leſs ſpace then what it naturally poſſeſſeth. 2. It cannot be congealed or fixed, as other fluids may. 3. It is of a different denſity in every part upward from the earth's ſurface, decreaſing in its weight, bulk for bulk, the higher it riſes; and therefore muſt alſo decreaſe in denſity. 4. It is of an elaſtic or ſpringy nature, and the force of its ſpring is equal to its weight.

That air is a body, is evident from its excluding all other bodies out of the ſpace it poſſeſſes: for, if a glaſs jar be plunged with its mouth downward into a veſſel of water, there will but very little water get into the jar, becauſe the air, of which it is full, keeps the water out.

As air is a body, it muſt needs have gravity or weight; and that it is weighty, is demonſtrated by experiment. For, let the air be taken out of a veſſel by means of the air-pump, then having weighed the veſſel, let in the air again, and upon weighing it when refilled with air, it will be found conſiderably heavier. Thus a bottle that holds a wine quart, being emptied of air and weighed, is found to be about 16 grains lighter then when the air is let into it again; which ſhews that a quart of air weighs 16 grains. But a quart of water weighs 14621 grains: this divided by 16 quotes 914 in round numbers; which ſhews, that water is 914 times as heavy as air near the ſurface of the earth.

As the air riſes above the earth's ſurface, it grows rarer, and conſequently lighter, bulk for bulk; for ſince it is of an elaſtic nature, and its lowermoſt parts are preſſed with the weight of all that is above them, it is plain that the air muſt be more denſe or compact at the earth's ſurface than at any height above it; and gradually rarer the higher up. For the denſity of the air is always as the force that compreſſeth it: and therefore, the air toward the upper part of the atmoſphere being leſs preſſed than that which is near the earth, will expand itſelf, and thereby become thinner than at the earth's ſurface.

Dr. Cotes has demonſtrated, that if altitudes in the air be taken in arithmetical proportion, the rarity of the air will be in geometrical proportion. For inſtance,

At the Altitude of	Miles above the ſurface of the earth, the air is	times thinner and lighter than at the earth's ſurface.
7	- - - - - - - - -	4
14	- - - - - - - - -	16
21	- - - - - - - - -	64
28	- - - - - - - - -	256
35	- - - - - - - - -	1024
42	- - - - - - - - -	4096
49	- - - - - - - - -	16384
56	- - - - - - - - -	65536
63	- - - - - - - - -	262144
70	- - - - - - - - -	1048576
77	- - - - - - - - -	4194304
84	- - - - - - - - -	16777216
91	- - - - - - - - -	67108864
98	- - - - - - - - -	268435456
105	- - - - - - - - -	1073741824
112	- - - - - - - - -	4294967296
119	- - - - - - - - -	17179869184
126	- - - - - - - - -	68719476736
133	- - - - - - - - -	274877906944
140	- - - - - - - - -	1099511627776

And

And hence it is eaſy to prove by calculation, that a cubic inch of ſuch air as we breathe would be ſo much rarefied at the altitude of 500 miles, that it would fill a ſphere equal in diameter to the orbit of Saturn.

The weight or preſſure of the air is exactly determined by the following experiment:

Take a glaſs tube about three feet long, and open at one end; fill it with quickſilver, and, putting your finger upon the open end, turn that end downward and immerſe it into a ſmall veſſel of quickſilver, without letting in any air: then take away your finger, and the quickſilver will remain ſuſpended in the tube 29½ inches above its ſurface in the veſſel; ſometimes more and at other times leſs, as the weight of the air is varied by winds and other cauſes. That the quickſilver is kept up in the tube by the preſſure is evident; for if the baſon and tube be put under a glaſs, and the air be then taken out of the glaſs, all the quickſilver in the tube will fall down into the baſon, and if the air be let in again, the quickſilver will riſe to the ſame height as before. Therefore the air's preſſure on the ſurface of the earth, is equal to the weight of 29½ inches depth of quickſilver all over the earth's ſurface, at a mean rate.

A ſquare column of quickſilver, 29½ inches high, and an inch thick, weighs juſt 15 pounds, which is equal to the preſſure of the air upon every ſquare inch of the earth's ſurface; and 144 times as much, or 2160 pounds upon every ſquare foot, contains 144 ſquare inches. At this rate a middle-ſized man, whoſe ſurface may be about 14 ſquare feet, ſuſtains a preſſure of 30240 pounds

when

when the air is of a mean gravity; a preſſure which would be inſupportable and fatal to us, were it not equal on every part, and counterbalanced by the ſpring of the air within us, which is diffuſed through the whole body, and re-acts with an equal force againſt the outward preſſure.

Now, ſince the earth's ſurface contains 200,000,000 ſquare miles, and every ſquare mile 27,876,400 ſquare feet, there muſt be 5,575,680,000,000,000 ſquare feet on the earth's ſurface; which number multiplied by 2160 pounds (the preſſure on each ſquare foot) gives 12,043,468,800,000,000,000 pounds for the preſſure or weight of the whole atmoſphere.

When the end of a pipe is immerſed in water, and the air is taken out of the pipe, the water will riſe in it to the height of 33 feet above the ſurface of the water in which it is immerſed; but will go no higher: for it is found, that a common pump will draw water no higher than 33 feet above the ſurface of the well; and unleſs the bucket goes within that diſtance from the well, the water will never get above it. Now, as it is the preſſure of the atmoſphere on the ſurface of the water in the well that cauſes the water to aſcend in the pump, and follow the piſton or bucket when the air above it is lifted up, it is evident, that a column of water 33 feet high is equal in weight to a column of quickſilver of the ſame diameter, 29½ inches high; and to as thick a column of air, reaching from the earth's ſurface to the top of the atmoſphere.

In ſerene calm weather, the air has weight enough to ſupport a column 31 inches high; but in tempeſtuous ſtormy weather, not above 28 inches. The quickſilver

ver thus ſupported in a glaſs tube, is found to be a nice counterbalance to the weight or preſſure of the air, and to ſhew its alterations at different times. And being now generally uſed to denote the changes in the weight of the air, and of the weather conſequent upon them, it is called the *barometer*, or weather-glaſs. — See the conſtruction and uſe of the barometer, p. 129 of the Introduction of Uſeful Knowledge.

The preſſure of the air being equal on all ſides of a body expoſed to it, the ſofteſt bodies ſuſtain this preſſure without ſuffering any change in their figure; and ſo do the moſt brittle bodies without being broke.

The air is rarefied, or made to ſwell with heat; and of this property, wind is a neceſſary conſequence. For when any part of the air is heated by the ſun, or otherwiſe, it will ſwell, and thereby affect the adjacent air; and ſo, by various degrees of heat in different places, there will ariſe various winds.

When the air is much heated, it will aſcend towards the upper part of the atmoſphere, and the adjacent air will ruſh in to ſupply its place; and therefore, there will be a ſtream or current of air from all parts towards the place where the heat is. And hence we ſee the reaſon why the air ruſhes with ſuch force into any place where a great fire is made. And alſo, why ſmoke is carried up a chimney, and why the air ruſhes in at the key-hole of the door, or any ſmall chink, when there is a fire in the room. So we may take it in general, that the air will preſs towards that part of the world where it is moſt heated.

Upon

Upon this principle we can eaſily account for the *trade-winds*, which blow conſtantly from eaſt to weſt about the equator; for, when the ſun ſhines perpendicularly on any part of the earth, it will heat the air very much in that part, which air will therefore riſe upward, and when the ſun withdraws, the adjacent air will ruſh in to fill its place; and conſequently will cauſe a ſtream or current of air from all parts towards that which is moſt heated by the ſun. But as the ſun, with reſpect to the earth, moves from eaſt to weſt, the common courſe of the air will be that way too; continually preſſing after the ſun; and therefore, at the equator, where the ſun ſhines ſtrongly, there will be a continual wind from the eaſt; but on the north ſide, it will incline a little to the north, and on the ſouth ſide to the ſouth.

This general courſe of wind about the equator, is changed in ſeveral places, and upon ſeveral accounts; as, 1. By exhalations that riſe out of the earth at certain times, and from certain places; in earthquakes and volcanoes. 2. By the falling of great quantities of rain, cauſing thereby a ſudden condenſation or contraction of the air. 3. By burning ſands, that often retain the ſolar heat to a degree incredible to thoſe who have not felt it, cauſing a more than ordinary rarefaction of the air contiguous to them. 4. By high mountains, which alter the direction of the winds in ſtriking againſt them. 5. By the declination of the ſun towards the north or ſouth, heating the air on the north or ſouth ſide the equator.

To theſe and ſuch cauſes are owing, 1. The irregularity or uncertainty of winds in climates diſtant from the equator, as in moſt parts of Europe. 2. Theſe periodical winds

winds called *Monſoons*, which in the Indian ſeas blow half a year one way, and half a year another. 3. Thoſe winds which on the coaſt of Guinea, and on the weſtern coaſts of America, blow always from weſt to eaſt. 4. The ſea breezes, which, in hot countries, blow generally from ſea to land, in the day time; and the land breezes, which blow in the night; and, in ſhort, all thoſe ſtorms, hurricanes, whirlwinds, and irregularities, which happen at different times and places. The Monſoons.

All common air is impregnated with a certain kind of vivifying ſpirit or quality, which is neceſſary to continue the lives of animals: and this, in a gallon of air, is ſufficient for one man during the ſpace of a minute, and not much longer. The vivifying ſpirit air.

The ſpirit in air is deſtroyed in paſſing through the lungs of animals: and hence it is, that an animal dies ſoon after being put under a veſſel which admits no freſh air to come to it. This ſpirit is alſo in the air which is in water; for fiſh die when they are excluded from freſh air, as in a pond that is cloſely frozen over: and the little eggs of inſects ſtopped up in a glaſs, do not produce their young though aſſiſted by a kindly warmth. The ſeeds alſo of plants mixed with good earth, and incloſed in a glaſs, will not grow.

This enlivening quality in air is alſo deſtroyed by the air's paſſing through fire; particularly charcoal fire, or the flame of ſulphur. Hence ſmoking chimneys muſt be very unwholeſome, eſpecially if the rooms they are in be ſmall and cloſe.

Air is alſo vitiated, by remaining cloſely pent up in any place for a conſiderable time; or perhaps, by being mixed with malignant ſteams and particles flowing from the neighbouring bodies: or laſtly, by the corruption of the vivifying ſpirit; as in holds of ſhips, in oil ciſterns, or wine cellars, which have been ſhut for a conſiderable time. The air in any of them is ſometimes ſo much vitiated, as to be immediate death to any animal that comes into it.

Damps. Air that has loſt its vivifying ſpirit is called damp, not only becauſe it is filled with humid or moiſt vapours but becauſe it deadens fire, extinguiſhes flame, and deſtroys life. The dreadful effects of damps are ſufficiently known to ſuch as work in mines.

If part of the vivifying ſpirit in air in any country begins to putrefy, the inhabitants of that country will be ſubject to an epidemical diſeaſe, which will continue until the putrefaction is over. And as the putrefying ſpirit occaſions this diſeaſe, ſo if the diſeaſed body contributes towards the putrefying of the air, then the diſeaſe will not only be epidemical, but peſtilential and contagious.

The atmoſphere is the common receptacle of all the effluvia or vapours ariſing from different bodies; of the ſteams and ſmoke of things burnt or melted; the fogs or vapours proceeding from damp watery places; and of the effluvia proceeding from ſulphureous, nitrous, acid, and alkaline bodies. In ſhort, whatever may be called volatile, riſes in air to greater or leſſer heights, according to its ſpecific gravity.

When

When the effluvia which ariſe from acid and alkaline bodies meet each other in the air, there will be a ſtrong conflict or fermentation between them; which will ſometimes be ſo great as to produce a fire; then if the effluvia be combuſtible, the fire will run from one part to another, juſt as the inflammable matter happens to lie. Fermentations.

Any one may be convinced of this, by mixing an acid and an alkaline fluid together, as Glauber's ſpirit of nitre and oil of cloves; upon the doing of which, a ſudden ferment, with a fine flame, will ariſe; and if the ingredients be very pure and ſtrong, there will be a ſudden exploſion.

Whoever conſiders the effects of fermentation, cannot be at a loſs to account for the dreadful effects of thunder and lightning; for the effluvia of ſulphureous and nitrous bodies, and others that may riſe into the atmoſphere, will ferment with each other, and take fire very often of themſelves; ſometimes by the aſſiſtance of the ſun's heat. Thunder and lightning.

If the inflammable matter be thin and light, it will riſe to the upper part of the atmoſphere, where it will flaſh without doing any harm: but if it be denſe, it will lie nearer the ſurface of the earth, where taking fire, it will explode with a ſurprizing force: and by its heat rarefy and drive away the air, kill men and cattle, ſplit trees, walls, rocks, &c. and be accompanied with terrible claps of thunder.


The heat of lightning appears to be quite different from that of other fires; for it has been known to run through wood, leather, cloth, &c. without hurting them,


while it has broken and melted iron, ſteel, ſilver, gold, and other hard bodies. Thus it has melted or burnt aſunder a ſword, without hurting the ſcabbard; and money in a man's pocket, without hurting his clothes. The reaſon of this ſeems to be, that the particles of that fire are ſo fine, as to paſs through ſoft, looſe bodies, without diſſolving them, whilſt they ſpend their whole force upon the hard ones.

It is remarkable, that knives and forks which have been ſtruck with lightning have a very ſtrong magnetical virtue for ſeveral years after: and I have heard that lightning ſtriking upon the mariner's compaſs, will ſometimes turn it round; and often make it ſtand the contrary way, or with the north pole towards the ſouth.

Fire damps. Much of the ſame kind with lightning are thoſe exploſions, called fulminating or fire-damps, which ſometimes happen in mines; and are occaſioned by ſulphureous and nitrous, or rather oleaginous particles, riſing from the mine and mixing with the air, where they will take fire by the lights the workmen are obliged to make uſe of. The fire being kindled, will run from one part of the mine to another, like a train of gunpowder, as the combuſtible matter happens to lie; and as the elaſticity of the air is increaſed by that heat, *that* in the mine will conſequently ſwell very much, and ſo, for want of room will explode with a greater or leſs degree of force, according to the denſity of the combuſtible vapours. It is ſometimes ſo ſtrong, as to blow up the mine; and at other times ſo weak, that when it has taken fire at the flame of a candle, it is eaſily blown out.

Air that will take fire at the flame of a candle, may be produced thus: Having exhauſted a receiver of the

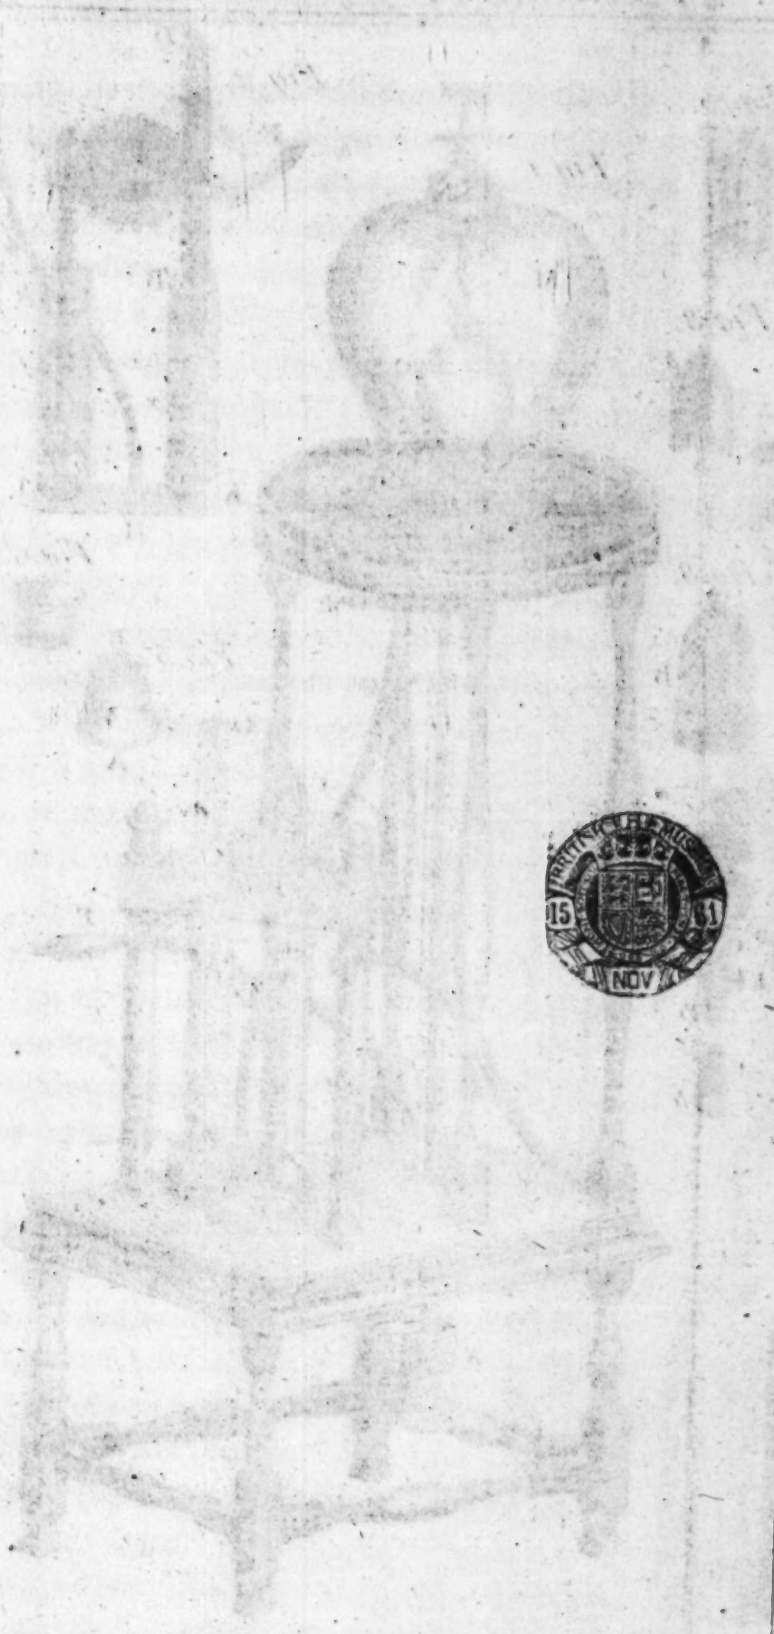
BRITISH MUSEUM
15
NOV
11

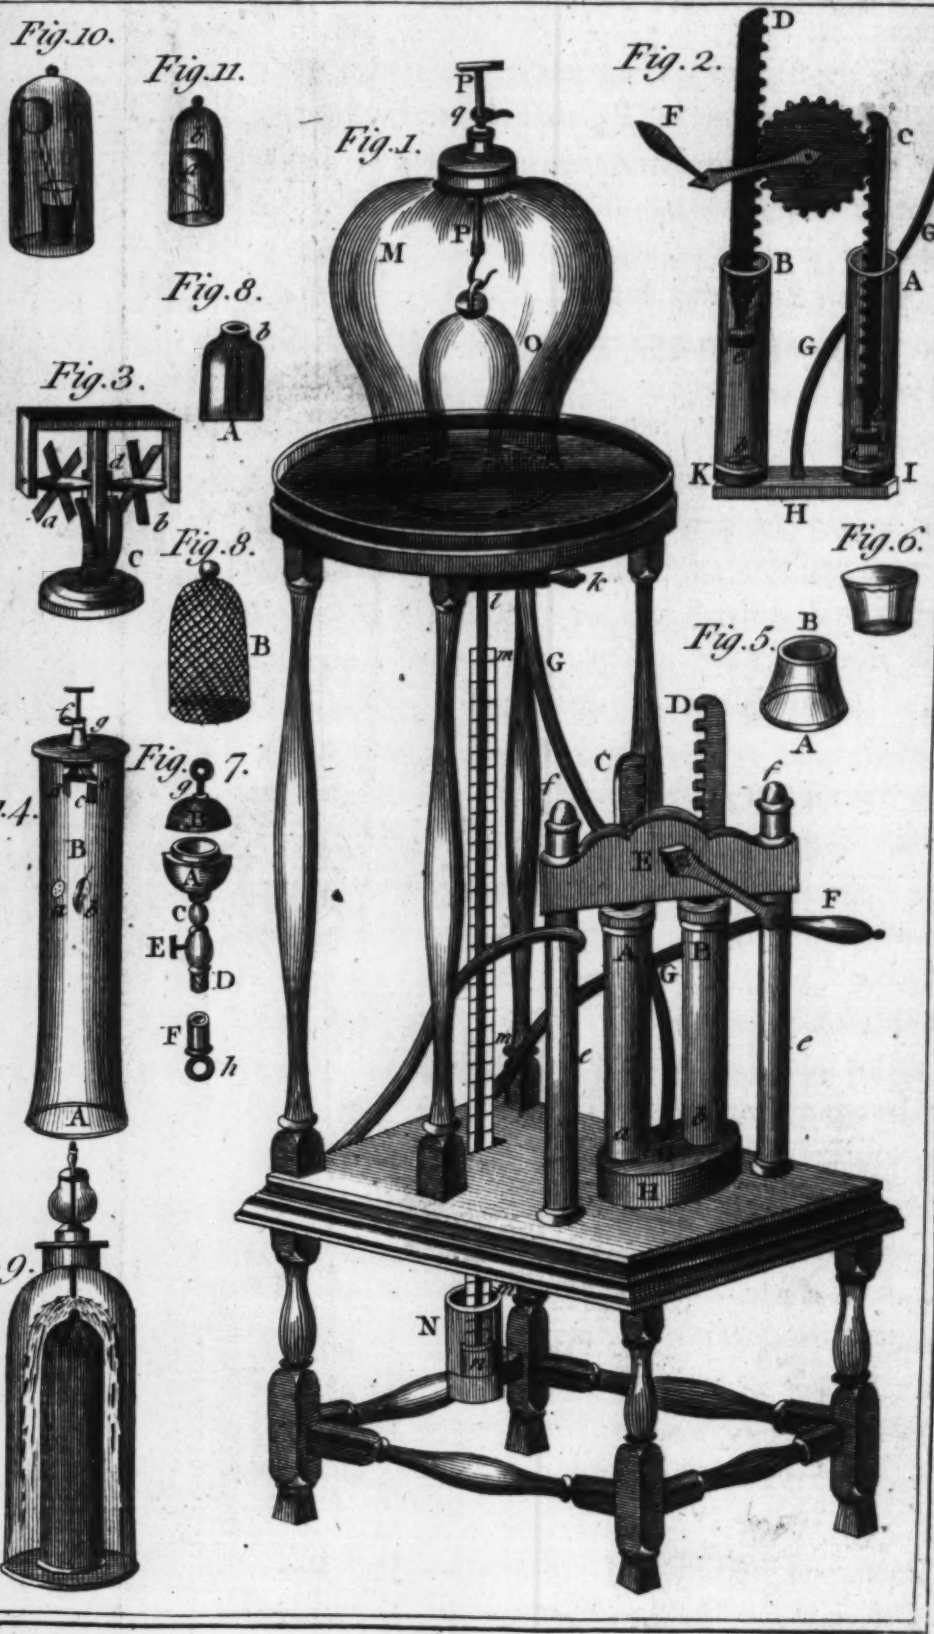
Fig.10.
Fig.11.
Fig.1.
Fig.2.
Fig.8.
Fig.3.
Fig.8.
Fig.6.
Fig.5.
Fig.7.
Fig.4.
Fig.9.
P
g
M
O
D
F
C
G
B
A
K
I
H
b
a
d
c
k
l
m
f
E
e
h
N

In Lodge sc

the air-pump, let the air run into it through the flame of the oil of turpentine; then remove the cover of the receiver, and holding a candle to that air, it will take fire, and burn quicker or ſlower, according to the denſity of the oleaginous vapour.

Earthquakes.

When ſuch combuſtible matter, as is above mentioned, kindles in the bowels of the earth, where there is little or no vent, it produces earthquakes, and violent ſtorms or hurricanes of wind when it breaks forth in the air.

An artificial earthquake may be made thus: Take 10 or 15 pounds of ſulphur, and as much of the filings of iron, and knead them with common water into the conſiſtency of a paſte; this being buried in the ground, will, in 8 or 10 hours time, burſt out into flames, and cauſe the earth to tremble all around to a conſiderable diſtance.

From this experiment we have a very natural account of the fires of Mount Ætna, Veſuvius, and other volcanoes, they being probably ſet on fire at firſt by the mixture of ſuch metalline and ſulphureous particles.

Plate VII. Fig. 1.

The air-pump being conſtructed the ſame way as the water-pump, whoever underſtands the one, will be at no loſs to underſtand the other.

Having put a wet leather on the plate L L of the air-pump, place the glaſs receiver M upon the leather, ſo that the hole i in the plate, may be within the glaſs; then turning the handle F backward and forward, the air will be pumped out of the receiver; which will then be held down to the plate by the preſſure of the external air,

or

or atmoſphere. For, as the handle F (Fig. 2.) is turned backwards, it raiſes the piſton d e in the barrel; B K, by means of the wheel E and rack D d: and, as the piſton is leathered ſo tight as to fit the barrel exactly, no air can get between the piſton and barrel; and therefore all the air above d in the barrel is lifted up towards B, and a vacuum is made in the barrel from b to e; upon which, part of the air in the receiver M (Fig. 1.) by its ſpring, ruſhes through the hole i, in the braſs plate L L, along the pipe G C G (which communicates with both barrels in the hollow trunk I H K, Fig. 2.) and puſhing up the valve b, enters into the vacant place b e of the barrel B K. For, wherever the reſiſtance or preſſure is taken off, the air will run to that place, if it can find a paſſage. Then if the handle F be turned forward, the piſton d e will be depreſſed in the barrel; and, as the air which had got into the barrel cannot be puſhed back through the valve b, it will aſcend through a hole in the piſton, and eſcape through a valve at d; and be hindered by that valve from returning into the barrel when the piſton is again raiſed. At the next raiſing of the piſton, a vacuum is again made in the ſame manner as before, between b and e; upon which more of the air that was left in the receiver M, gets out thence by its ſpring, and runs into the barrel B K, through the valve B. The ſame thing is to be underſtood with regard to the other barrel A I; and as the handle F is turned backwards and forwards, it alternately raiſes and depreſſes the piſtons in their barrels; always raiſing one while it depreſſes the other. And, as there is a vacuum made in each barrel when its piſton is raiſed, the particles of air in the receiver M, puſh out another, by their ſpring or elaſticity, through the hole i, and pipe G G into the barrels; until at laſt the air in the

the receiver comes to be ſo much dilated, and its ſpring ſo far weakened, that it can no longer get through the valves; and then no more can be taken out. Hence, there is no ſuch thing as making a perfect vacuum in the receiver; for the quantity of air taken out at any one ſtroke, will always be as the denſity thereof in the receiver; therefore it is impoſſible to take it all out, becauſe, ſuppoſing the receiver and barrels of equal capacity, there will be always as much left as was taken out at the laſt turn of the handle.

There is a cock k below the pump-plate, which being turned, lets the air into the receiver again; and then the receiver becomes looſe, and may be taken off the plate. The barrels are fixed to the frame E e e by two ſcrew-nuts f f, which preſs down the top-piece E upon the barrels: and the hollow trunk H (in Fig. 2.) is covered by a box, as G H (in Fig. 1.)

There is a glaſs tube, I m m m n, open at both ends, and about 34 inches long; the upper end communicating with the hole in the pump-plate, and the lower end immerſed in quickſilver at n in the veſſel N. To this tube is fitted a wooden ruler m m, called the gauge which is divided into inches and parts of an inch, from the bottom at n (where it is even with the ſurface of the quickſilver) and continued up to the top, a little below l, to 30 or 31 inches.

As the air is pumped out of the receiver M, it is likewiſe pumped out of the tube l m n, becauſe that tube opens into the receiver through the pump-plate; and as the tube is gradually emptied of air, the quickſilver in the veſſel N is forced up into the tube by the preſſure of the

the atmoſphere. And if the receiver could be perfectly exhauſted of air, the quickſilver would ſtand as high in the tube as it does at that time in the barometer: for it is ſupported by the ſame power or weight of the atmoſphere in both.

The quantity of air exhauſted out of the receiver on each turn of the handle, is always proportionable to the aſcent of the quickſilver on that turn: and the quantity of air remaining in the receiver, is proportionable to the defect of the height of the quickſilver in the gauge, from what it is at that time in the barometer.

I ſhall now give an account of the experiments made with the air-pump; ſhewing the reſiſtance, weight, and elaſticity of the air.

To ſhew the reſiſtance of the air. There is a little machine, conſiſting of two mills, a and b, which are of equal weights, independent of each other, and turn equally free on their axles in the frame. Each mill has four thin arms or ſails fixed into the axis: thoſe of the mill a have their planes at right angles to its axis, and thoſe of b have their planes parallel to it. Therefore, as the mill a turns round in common air, it is but little reſiſted thereby, becauſe its ſails cut the air with their thin edges: but the mill b is much reſiſted, becauſe the broad ſide of its ſails move againſt the air when it turns round. In each axle is a fine pin near the middle of the frame, which goes quite through the axle, and ſtands out a little on each ſide of it: under theſe pins the ſlider a may be made to bear, and ſo hinder the mills from going, when the ſtrong ſpring C is ſet on bend againſt the oppoſite ends of the pins.

Having

Having ſet this machine upon the pump-plate L L (fig. 1.) draw up the ſlider d to the pins on one ſide, and ſet the ſpring C at bend on the oppoſite ends of the pins: then puſh down the ſlider d, and the ſpring acting equally ſtrong upon each mill, will ſet them both a going with equal forces and velocities; but the mill a, will run much longer than the mill b, becauſe the air makes much leſs reſiſtance againſt the edges of its ſails than againſt the ſides of the ſails of b.

Draw up the ſlider again, and ſet the ſpring upon the pins as before; then cover the machine with the receiver M upon the pump-plate; and having exhauſted the receiver of air, puſh down the wire P P (thro' the collar of leathers in the neck g) upon the ſlider; which will diſengage it from the pins, and allow the mills to turn round by the impulſe of the ſpring: and as there is no air in the receiver to make any ſenſible reſiſtance againſt them, they will both move a conſiderable time longer than they did in the open air; and the moment that one ſtops the other will do ſo too. This ſhews that air reſiſts bodies in motion, and that equal bodies meet with different degrees of reſiſtance, according as they preſent greater or leſs ſurfaces to the air in the planes of their motions. Fig. 1.

Take off the receiver M, and the mills; and having put the guinea a and feather b upon the braſs flap c, turn up the flap and ſhut it into the notch d. Then, putting a wet leather over the top of the tall receiver A B (it being open both at top and bottom, cover it with the plate C, from which the guinea and feather tongs e d will then hang within the receiver. This done, pump the air out Experiment II. Fig. 4.

of the receiver; and then draw up the wire f a little, which by a ſquare piece on its lower end, will open the tongs e d; and the flap falling down as at c, the guinea and feather will deſcend with equal velocities in the receiver; and both will fall upon the pump-plate at the ſame inſtant.

In this experiment the obſervers ought not to look at the top, but at the bottom of the receiver, in order to ſee the guinea and feather fall upon the plate; otherwiſe, on account of the quickneſs of their motion, they will eſcape the ſight of the beholders.

To ſhew the Weight of the Air.

Experiment III. HAVING fitted a braſs cap, with a valve tied over it, to the mouth of a thin bottle or Florence flaſk, whoſe contents are exactly known, ſcrew the neck of this cap into the hole i of the pump-plate: then having exhauſted the air out of the flaſk, and taken it off the pump, let it be ſuſpended at one end of a balance, and nicely counterpoiſed by weights in the ſcale at the other end: this done, raiſe up the valve with a pin, and the air will ruſh into the flaſk with an audible noiſe; during which time the flaſk will deſcend, and pull down that end of the beam. When the noiſe is over, put as many grains into the ſcale, at the other end, as reſtore the equilibrium; and they will ſhew exactly the weight of the quantity of air that has got into the flaſk, and filled it. If the flaſk holds an exact quart, it will be found, that 16 grains will reſtore the equipoiſe of the balance when the quickſilver ſtands at 29½ inches in the barometer; which ſhews, that when the air is at a mean rate of denſity, a quart of it

it weighs 16 grains: it weighs more when the quickſilver ſtands higher; and leſs when it ſtands lower.

Experiment IV.

Place the ſmall receiver O (fig. 1.) over the hole i in the pump-plate, and upon exhauſting the air, the receiver will be fixed down to the plate by the preſſure of the air on its outſide, which is left to act alone, without any air in the receiver to act againſt it: and this preſſure will be equal to as many times 15 pounds as there are ſquare inches in that part of the plate which the receiver covers; which will hold down the receiver ſo faſt, that it cannot be got off until the air be let into it by turning the cock k; and then it becomes looſe.

Experiment V. Fig. 5.

Set the little glaſs A B (which is open at both ends) over the hole i upon the pump-plate L L, and put your hand cloſe upon the top of it at B: then upon exhauſting the air out of the glaſs, you will find your hand preſſed down with a great weight upon it: ſo that you can hardly releaſe it until the air be re-admitted into the glaſs by turning the cock k; which air, by acting as ſtrongly upward againſt the hand as the external air acted in preſſing it downward, will releaſe the hand from its confinement.

Experiment VI. Fig. 6.

Having tied a piece of wet bladder b over the open top of the glaſs A (which is alſo open at bottom) ſet it to dry, and then the bladder will be tight like a drum. Then place the open plate A upon the pump-plate, over the hole i, and begin to exhauſt the air out of the glaſs. As the air is exhauſting, its ſpring in the glaſs will be weakened, and give way to the preſſure of the outward air on the bladder; which, as it is preſſed down, will put

on a ſpherical concave figure, which will grow deeper and deeper, until the ſtrength of the bladder be overcome by the weight of the air; and then it will break with a report as loud as that of a gun. If a flat piece of glaſs be laid upon the top of this receiver, and joined to it by a flat ring of wet leather between them, upon pumping the air out of the receiver, the preſſure of the outward air upon the flat glaſs will break it all to pieces.

Experiment VII. Plate VIII. Fig. 1.

Pour ſome quickſilver into the jar D, and ſet it on the pump-plate near the hole i; then ſet on the tall open receiver A B, ſo as to be over the jar and hole; and cover the receiver with the braſs plate C. Screw the open glaſs tube f g, which has a braſs top on it at h, into the ſyringe H, and, putting the tube through a hole in the middle of the plate, ſo as to immerſe the lower end of the tube e into the quickſilver at D, ſcrew the end h of the ſyringe into the plate. This done, draw up the piſton in the ſyringe by the ring I, which will make a vacuum in the ſyringe below the piſton: and as the upper end of the tube opens into the ſyringe, the air will be dilated in the tube, becauſe part of it, by its ſpring, gets up to the ſyringe; and the ſpring of the undilated air in the receiver acting upon the ſurface of the quickſilver in the jar, will force part of it up into the tube: for the quickſilver will follow the piſton in the ſyringe, in the ſame way, and for the ſame reaſon, that water follows the piſton of a common pump when it is raiſed in the pump-barrel; and this, according to ſome, is done by ſuction. But to refute that erroneous notion, let the air be pumped out of the receiver A B, and then all the quickſilver in the tube will fall down by its own weight into the jar; and cannot be raiſed one hair's breadth in the tube by working the ſyringe; which ſhews that ſuction had no hand in raiſing the quickſilver: and to prove that it is done

Fig. 1.



Fig. 3.



Fig. 7.



Fig. 8.



Fig. 12.



Fig. 11.



Fig. 5.



Fig. 2.



Fig. 9.




Fig. 10.



Fig. 4.



Fig. 6.

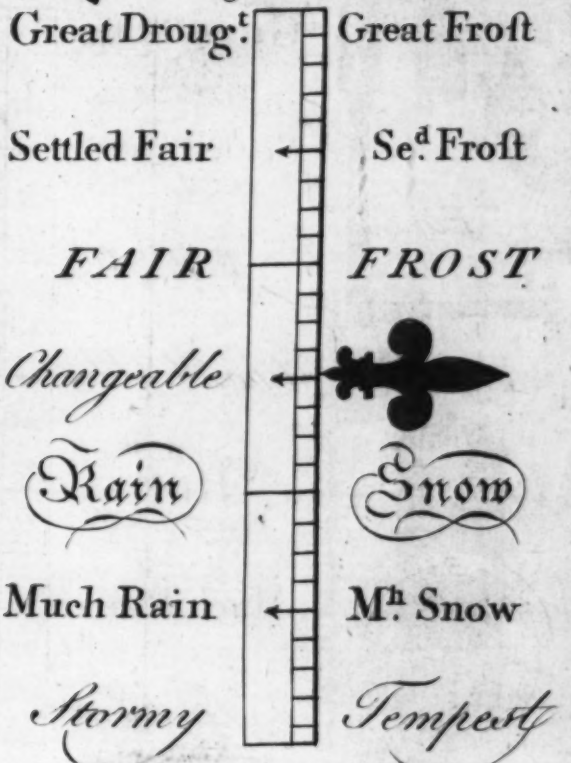

In Lodge sc.

Expe
V
Plate
Fig.



done by preſſure, let the air into the receiver by the cock k (Plate VII. fig. 1.) and its action upon the ſurface of the quickſilver in the jar will raiſe it up into the tube, although the piſton of the ſyringe continues motionleſs. If the tube be about 32 or 33 inches high, the quickſilver will riſe in it very near as high as it ſtands at that time in the barometer. And, if the ſyringe has a ſmall hole, as m, near the top of it, and the piſton be drawn up above that hole, the air will ruſh thro' the hole into the ſyringe and tube, and the quickſilver will immediately fall down into the jar. If this part of the apparatus be air-tight, the quickſilver may be pumped up into the tube to the ſame height that it ſtands in the barometer; but it will go no higher, becauſe then the weight of the column in the tube is the ſame as the weight of a column of air, of the ſame thickneſs with the quickſilver, and reaching from the earth to the top of the atmoſphere.

Experiment VIII. Fig. 2.

Having placed the jar A, with ſome quickſilver in it, on the pump-plate, as in the laſt experiment, cover it with the receiver B, then puſh the open end of the glaſs tube d e through the collar of leathers in the braſs neck C (which it fits ſo as to be air-tight) almoſt down to the quickſilver in the jar; then exhauſt the air out of the receiver, and it will alſo come out of the tube, becauſe the tube is cloſe at top. When the gauge m m ſhews that the receiver is well exhauſted, puſh the tube, ſo as to immerſe its lower end into the quickſilver in the jar. Now, although the tube be exhauſted of air, none of the quickſilver will riſe into it, becauſe there is no air left in the receiver to preſs upon its ſurface in the jar. But let the air into the receiver by the cock k, and the quickſil-

ver

ver will immediately riſe in the tube, and ſtand as high in it as it was pumped up in the laſt experiment.

Both theſe experiments ſhew that the quickſilver is ſupported in the barometer by the preſſure of the air on its ſurface in the box, in which the open end of the tube is placed; and that the more denſe and heavy the air is, the higher the quickſilver riſes; and, on the contrary, the thinner and lighter the air is, the more will the quickſilver fall; for if the handle F be turned ever ſo little, it takes ſome air out of the receiver, by raiſing one or other of the piſtons in its barrel; and conſequently, that which remains in the quickſilver is ſo much the rarer, and has ſo much the leſs ſpring and weight; and thereupon the quickſilver falls a little in the tube: but upon turning the cock, and re-admitting the air into the receiver, it becomes as weighty as before, and the quickſilver riſes again to the ſame height. Thus we ſee the reaſon why the quickſilver in the barometer falls before rain or ſnow, and riſes before fair weather; for in the former caſe the air is too thin and light to bear up the vapours; and in the latter, too denſe and heavy to let them fall.

It is to be noted, that, in all mercurial experiments with the air-pump, a ſhort pipe muſt be ſcrewed into the hole i, ſo as to riſe about an inch above the plate, to prevent the quickſilver from getting into the air-pipe and barrels, in caſe any of it ſhould be accidentally ſpilt over the jar; for if it once gets into the pipes or barrels, i ſpoils them, by looſening the ſolder, and corroding the braſs.

Take

Take the tube out of the receiver, and put one end of a bit of dry hazel branch, about an inch long, tight into the hole, and the other end tight into a hole quite thro' the bottom of a ſmall wooden cup; then pour ſome quickſilver into the cup, and exhauſt the receiver of air, and the preſſure of the outward air, on the ſurface of the quickſilver, will force it thro' the pores of the hazel, from whence it will deſcend in a beautiful ſhower, into a glaſs cup placed under the receiver to catch it. Experiment IX.

Put a wire through the collar of leathers on the top of the receiver, and fix a bit of dry wood on the end of the wire within the receiver; then exhauſt the air, and puſh the wire down ſo as to immerſe the wood into a jar of quick-ſilver on the pump-plate; this done, let in the air, and upon taking the wood out of the jar and ſplitting it, its pores will be found full of quickſilver, which the force of the air, upon being let into the quickſilver, drove into the wood. Experiment X.

Join the two braſs hemiſpherical cups A and B toge-ther, with a wet leather between them, having a hole in the middle of it; then ſcrew the end D of the pipe C D into the plate of the pump at i, and turn the cock E, ſo as the pipe may be open all the way into the cavity of the hemiſpheres: then exhauſt the air out of them, and turn the cock a quarter round, which will ſhut the pipe C D and keep out the air. This done, unſcrew the pipe at D from the pump, and ſcrew the piece F h upon it at D; and let two ſtrong men try to pull the hemiſpheres aſunder by the rings g and h, which they will find hard to do; for if the diameter of the hemiſpheres be four inches, they will be preſſed together by the external air with a force equal to 190 pounds: and to ſhew that it is the preſſure Experiment XI Plate VII. Fig. 7.

preſſure of the air that keeps them together, hang them by either of the rings upon the hook P of the wire in the receiver M (Fig. 1.) and, upon exhauſting the air out of the receiver, they will fall aſunder of themſelves.

Experiment XII. Place a ſmall receiver O (Fig. 1.) near the hole i on the pump-plate, and cover both it and the hole with the receiver M; and turn the wire ſo by the top P, that its hook may take hold of the little receiver by a ring at its top, allowing that receiver to ſtand with its own weight on the plate. Then, upon working the pump, the air will come out of both receivers; but the large one M, will be forcibly held down to the pump by the preſſure of the external air; whilſt the ſmall one O, having no air to preſs upon it, will continue looſe, and may be drawn up and let down at pleaſure by the wire P P. But upon letting it quite down to the plate, and admitting the air into the receiver M, by the cock k, the air will preſs ſo ſtrongly upon the ſmall receiver O, as to fix it down to the plate; and, at the ſame time, by counterbalancing the outward preſſure on the large receiver M, it will become looſe. This experiment evidently ſhews, that the receivers are held down by preſſure, and not by ſuction, for the internal receiver continued looſe while the operator was pumping, and the external one was held down; but the former became faſt immediately by letting in the air upon it.

Plate VIII. Fig. 3. Experiment XIII. Screw the end A of the braſs pipe ABF into the pump-plate, and turn the cock e until the pipe be open; then put a wet leather on the plate c d (fixed on the pipe) and cover it with the tall receiver G H, which is cloſe at top; then exhauſt the air out of the receiver, and turn the cock e

to

to keep it out; which done, unſcrew the pipe from the pump, and ſet its end A into a baſon of water, and turn the cock e to open the pipe; on which, as there is no air in the receiver, the preſſure of the atmoſphere on the water in the baſon, will drive the water forcibly thro' the pipe, and make it play up in a jet to the top of the receiver.

Set the ſquare phial A upon the pump-plate, and having covered it with the wire cage B, put a cloſe receiver over it, and exhauſt the air out of the receiver; in doing which, the air will alſo make its way out of the phial, through a ſmall hole in its neck under the valve b. When the air is exhauſted, turn the cock below the plate to re-admit the air into the receiver; and as it cannot get into the phial again, becauſe of the valve, the phial will be broke into ſome thouſands of pieces by the preſſure of the air upon it. Had the phial been of a round form, it would have ſuſtained this preſſure like an arch, without breaking; but as its ſides are flat, it cannot. Plate VII. Fig. 8. Experiment XIV.

To ſhew the elaſticity or ſpring of the air. Tie up a very ſmall quantity of air in a bladder, and put it under the receiver: then exhauſt the air out of the receiver; and the ſmall quantity which is confined in the bladder (having nothing to act againſt it) will expand itſelf ſo by the force of its ſpring, as to fill the bladder as full as it could be blown of common air. But upon letting the air into the receiver again, it will overpower the air in the bladder, and preſs its ſides almoſt cloſe together. Experiment XV. Fig. 11.

If the bladder ſo tied up be put into a wooden box, and have 20 or 30 pounds weight of lead put upon it in the box, and the box be covered with a cloſe receiver; Experiment XVI.

upon exhauſting the air out of the receiver, that air which is confined in the bladder will expand itſelf ſo as to raiſe up all the lead by the force of its ſpring.

Plate VIII. Fig. 3. Exp. 17. Screw the pipe A B into the pump-plate, place the tall receiver G H upon the plate c d, as in the 13th experiment, and exhauſt the air out of the receiver; then turn the cock e to keep out the air, unſcrew the pipe from the pump, and ſcrew it into the mouth of the copper veſſel C C (Fig. 4.) the veſſel having been firſt about half filled with water. Then open the cock e (Fig. 3.) and the ſpring of the air which is confined in the copper veſſel will force the water up thro' the pipe A B in a jet into the exhauſted receiver, as ſtrongly as it did by its preſſure on the ſurface of the water in a baſon, in the thirteenth experiment.

Exp. 18. If a fowl, cat, rat, mouſe, or bird, be put under a receiver, and the air be exhauſted, the animal will be at firſt oppreſſed as with a great weight, then grow convulſed, and at laſt expire in all the agonies of a moſt bitter and cruel death. But as this experiment is too ſhocking to every ſpectator who has the leaſt degree of humanity, we ſubſtitute a machine called the *lungs-glaſs*, in place of the animal.

Exp. 19. If a butterfly be ſuſpended in a receiver, by a fine thread tied to one of its horns, it will fly about in the receiver, as long as the receiver continues full of air; but if the air be exhauſted, tho' the animal will not die, and will continue to flutter its wings, it cannot remove itſelf from the place where it hangs, in the middle of the receiver, until the air be let in again, and then the animal will fly about as before.

Pour

Pour ſome quickſilver into the ſmall bottle A, and ſcrew the braſs collar c of the tube B C into the braſs neck b of the bottle, and the lower end of the tube will be immerſed into the quickſilver, ſo that the air above the quickſilver in the bottle will be confined there, becauſe it cannot get about the joining, nor can it be drawn out thro' the quickſilver into the tube. This tube is alſo open at top, and is to be covered with the receiver G and large tube E F; which tube is fixed by braſs collars to the receiver, and is cloſe at the top. This preparation being made, exhauſt the air both out of the receiver and its tube; and the air will by the ſame means be exhauſted out of the inner tube B C thro' its open top at C; and as the receiver and tubes are exhauſting, the air that is confined in the glaſs bottle A will preſs ſo by its ſpring on the ſurface of the quickſilver, as to force it up in the inner tube as high as it was raiſed in the tenth experiment by the preſſure of the atmoſphere: which demonſtrates that the ſpring of the air is equivalent to its weight. Exp. 20. Fig. 5.

Put a cork into the ſquare phial A, and fix it in with wax or cement; put the phial on the pump-plate with the wire cage B over it, and cover the cage with a cloſe receiver; then exhauſt the air out of the receiver, and the air that was corked up in the phial will break the phial outwards by the force of its ſpring, becauſe there is no air left on the outſide of the phial to act againſt the air within it. Exp. 21. Plate VII. Fig. 8.

Put a ſhrivelled apple under a cloſe receiver, and exhauſt the air; then the ſpring of the air within the apple will plump it out, ſo as to cauſe all the wrinkles to diſappear; but upon letting the air into the receiver again, to preſs upon the apple, it will inſtantly return to its former decayed and ſhrivelled ſtate. Exp. 22.

Exp. 23. Take a freſh egg, and cut off a little of the ſhell and film from its ſmalleſt end, then put the egg under a receiver, and pump out the air; upon which all the contents of the egg will be forced out into the receiver, by the expanſion of a ſmall bubble of air contained in the great end, between the ſhell and film.

Exp. 24. Put ſome warm beer into a glaſs, and having ſet it on the pump, cover it with a cloſe receiver, and then exhauſt the air. Whilſt this is doing, and thereby the preſſure more and more taken off from the beer in the glaſs, the air therein will expand itſelf, and riſe up in innumerable bubbles to the ſurface of the beer; and from thence it will be taken away with the other air in the receiver. When the receiver is nearly exhauſted, the air in the beer, which could not diſentangle itſelf quick enough to get off with the reſt, will now expand itſelf ſo, as to cauſe the beer to have all the appearance of boiling; and the greateſt part of it will go over the glaſs.

Exp. 25. Put ſome warm water into a glaſs, and put a bit of dry wainſcot or other wood into the water; then cover the glaſs with a cloſe receiver, and exhauſt the air; upon which the air in the wood having liberty to expand itſelf, will come out plentifully, and make all the water to bubble about the wood, eſpecially about the ends, becauſe the pores lie lengthways. A cubic inch of dry wainſcot has ſo much air in it, that it will continue bubbling for near half an hour together.

Miſcellaneous Experiments.

SCREW the ſyringe H (fig. 1.) to a piece of lead that weighs one pound at leaſt; and, holding the lead in one hand, pull up the piſton in the ſyringe with the other; then quitting hold of the lead, the air will puſh it upward, and drive back the ſyringe upon the piſton. The reaſon of this is, that the drawing up of the piſton makes a vacuum in the ſyringe, and the air which preſſes every way equally, having nothing to reſiſt its preſſure upward, the lead is thereby preſſed upward, contrary to its natural tendency by gravity. If the ſyringe, ſo loaded, be hung in a receiver, and the air be exhauſted, the ſyringe and lead will deſcend upon the piſton-rod by their natural gravity; and, upon admitting the air into the receiver, they will be driven upward again, until the piſton be at the very bottom of the ſyringe. Exp. 26. Plate VIII.

Let a large piece of cork be ſuſpended by a thread at one end of a balance, and counterpoiſed by a leaden weight, ſuſpended in the ſame manner, at the other. Let this balance be hung to the inſide of the top of a large receiver; which being ſet on the pump, and the air exhauſted, the cork will preponderate, and ſhew itſelf to be heavier than the lead; but upon letting in the air again, the equilibrium will be reſtored. The reaſon of this is, that ſince the air is a fluid, and all bodies loſe as much of their abſolute weight in it as is equal to the weight of their bulk of the fluid, the cork being the larger body, loſes more of its real weight than the lead does; and therefore muſt in fact be heavier, to balance it under the diſadvantage of loſing ſome of its weight, Exp. 27.

which

which diſadvantge being taken off by removing the air, the bodies then gravitate according to their real quantities of matter, and the cork which balanced the lead in air, ſhews itſelf to be heavier when in vacuo.

Exp. 28. Set a lighted candle upon the pump, and cover it with a tall receiver. If the receiver holds a gallon, the candle will burn a minute; and then, after having gradually decayed from the firſt inſtant, it will go out; which ſhews that a conſtant ſupply of freſh air is neceſſary to feed flame; and ſo it alſo is for animal life; for a bird kept under a cloſe receiver will ſoon die, altho' no air be pumped out; and it is found that, in the diving bell, a gallon of air is ſufficient only for one minute for a man to breathe in.

The moment when the candle goes out, the ſmoke will be ſeen to aſcend to the top of the receiver, and there it will form a ſort of cloud; but upon exhauſting the air, the ſmoke will fall down to the bottom of the receiver, and leave it as clear at the top as it was before it was ſet upon the pump. This ſhews that ſmoke does not aſcend on account of its being poſitively light, but becauſe it is lighter than air; and its falling to the bottom when the air is taken away, ſhews that it is not deſtitute of weight. So moſt ſorts of wood aſcend or ſwim in water; and yet there are none who doubt of the wood's having gravity or weight.

Exp. 29. Set a receiver which is open at top, on the air-pump, and cover it with a braſs plate and wet leather; and having exhauſted it of air, let the air in again at top thro' an iron pipe, making it paſs thro' a charcoal flame at the end of the pipe; and when the receiver is full of that air, lift up the cover, and let down a mouſe or bird into

to the receiver, and the burnt air will immediately kill it. If a candle be let down into that air, it will go out directly; but by letting it down gently, it will purify the air ſo far as it goes; and ſo by letting it down more and more, the flame will drive out the bad air, and good air will get in.

Set a bell upon a cuſhion on the pump-plate, and cover it with a receiver; then ſhake the pump to make the clapper ſtrike againſt the bell, and the ſound will be very well heard; but, exhauſt the receiver of air, and then, if the clapper be made to ſtrike ever ſo hard againſt the bell, it will make no ſound at all; which ſhews that air is abſolutely neceſſary for the propagation of ſound. Exp. 30.

Let a candle be placed on one ſide of a receiver, and viewed thro' the receiver at ſome diſtance; then, as ſoon as the air begins to be exhauſted, the receiver will be filled with vapours, which riſe from the wet leather, by the ſpring of the air in it; and the light of the candle being refracted through that medium of vapours, will have the appearance of circles of various colours, of a faint reſemblance to thoſe of the rainbow. Exp. 31.

The air-pump was invented by *Otho Guericke*, of *Magdeburg*; but was much improved by Mr. *Boyle*, to whom we are indebted for our greateſt part of the knowledge of the wonderful properties of the air, demonſtrated in the above experiments.

The elaſtic air which is contained in many bodies, and is kept in them by the weight of the atmoſphere, may be got out of them either by boiling, or by the air-pump,

as

as ſhewn in the 24th experiment: but the fixed air, which is by much the greater quantity, cannot be got out but by diſtillation, fermentation, or putrefaction.

If fixed air did not come out of bodies with difficulty, and ſpend ſome time in extricating itſelf from them, it would tear them to pieces. Trees would be rent by the change of air, from a fixed to an elaſtic ſtate; and animals would be burſt in pieces by the exploſion of air in their food.

Dr. *Hales* found by experiment, that the air in apples is ſo much condenſed, that if it were let out into the common air, it would fill a ſpace 48 times as great as the bulk of the apples themſelves; ſo that its preſſure outwards was equal to 11776lb.; and in a cubic inch of oak to 19860lb. againſt its ſides. So that if the air was let looſe at once in theſe ſubſtances, they would tear every thing to pieces about them, with a force ſuperior to that of gunpowder. Hence, in eating apples, it is well that they part with the air by degrees as they are chewed, and foment in the ſtomach, otherwiſe an apple would be immediate death to him who eats it.

The mixing of ſome ſubſtances with others will releaſe the air from them all of a ſudden; which may be attended with very great danger. Of this we have a remarkable inſtance in an experiment made by Dr. Slare; who, having put half a dram of oil of carraway-ſeeds into one glaſs, and a dram of compound ſpirit of nitre in another, covered them both on the air-pump with a receiver 6 inches wide, and 8 inches deep, and then exhauſted the air, and continued pumping until all that could poſſibly be got both out of the receiver and out of the two fluids, was extricated: then, by a particular

cular contrivance from the top of the receiver, he mixed the fluids together; upon which they produced ſuch a prodigious quantity of air, as inſtantly blew up the receiver, although it was preſſed down by the atmoſphere with upwards of 400 pounds weight. Obſerve in the 27th experiment, the cork muſt be covered all over with a piece of thin wet bladder glued to it, and not uſed until it be thoroughly dry.

The Conſtruction and Uſe of the Barometer, or Weather Glaſs.

THIS inſtrument is uſeful for meaſuring the weight of the atmoſphere, and in foretelling the changes of the weather, and alſo for meaſuring the height of mountains, &c. Fig. 2.

The common barometer conſiſts of a glaſs tube hermetically ſealed at one end, and filled with quickſilver, and defecated and purged of its air. The finger being then placed on the open end, in immediate contact with the mercury, ſo as not to admit the leaſt particle of air, the tube is inverted, and the lower end plunged into a baſon of the ſame prepared mercury (See Miſcellaneous Articles.) Then, upon removing the finger, the mercury in the tube will join that in the baſon, and the mercurial column in the tube will ſubſide to the height of twenty-nine or thirty inches, according to the ſtate of the atmoſphere at that time (See the Scale.) This is the principle upon which all barometers are conſtructed. Fig. 6.

In the beginning of the laſt century, philoſophers were of opinion that the aſcent of water in pumps was owing to the abhorrence of a vacuum; and, that by means of ſuction, fluids might be raiſed to any height whatever.

Galilæo's diſcovery.

But *Galilæo*, who flouriſhed about that time, diſcovered that water would not aſcend in a pump unleſs the ſucker reached within thirty-three feet of its ſurface in the well. From hence he concluded, that not the power of ſuction, but the preſſure of the atmoſphere was the cauſe of the aſcent of water in pumps: that a column of water thirty-three feet high was a counterpoiſe to one of air of an equal baſe, whoſe height extended to the top of the atmoſphere; and that for this reaſon the water would not follow the ſucker any farther. From this, TORRICELLI, *Galilæo*'s diſciple, took the hint; and conſidered that, if a column of water of about thirty-three feet in height was equal in weight to one of air having the ſame baſe, a column of mercury no longer than about twenty-nine inches and a half would be ſo too, becauſe, mercury being about fourteen times heavier than water, a column of mercury muſt be fourteen times ſhorter than one of water equally heavy. Accordingly, having filled a glaſs tube with mercury, and inverted it into a baſon of the ſame, he found the mercury in the tube to deſcend till it ſtood about twenty-nine inches and a half above the ſurface of that in the baſon.

Torricellian experiment.

It was, however, ſome time after the Torricellian experiment had been made, and even after it had been univerſally agreed, that the ſuſpenſion of the mercury was owing to the weight of the atmoſphere, before it was diſcovered that this preſſure of the air was different at different times, though the tube was kept in the ſame place. But the variations of altitude in the mercurial columns were too obvious to remain long unobſerved: and accordingly philoſophers ſoon became careful enough to mark them. When this was done, it was impoſſible to avoid obſerving alſo, that the changes in the height of the mercury were accompanied, or very quickly ſucceeded,

ceeded, by changes in the weather. Hence, the inſtrument obtained the name of the Weather-Glaſs; and was generally made uſe of with a view to the foreknowledge of the weather. In this character, its principal phenomena are as follow:

Preliminary rules to judge of the weather.

1. The riſing of the mercury preſages, in general, fair weather; and its falling, foul weather; as rain, ſnow, high winds, and ſtorms. 2. In very hot weather, the falling of the mercury foreſhews thunder. 3. In winter, the riſing preſages froſt; and in froſty weather, if the mercury falls three or four diviſions, there will certainly follow a thaw. But in a continued froſt, if the mercury riſes, it will certainly ſnow. 4. When foul weather happens ſoon after the falling of the mercury, expect but little of it; and, on the contrary, expect but little fair weather when it proves fair ſhortly after the mercury has riſen. 5. In foul weather, when the mercury riſes much and high, and ſo continues for two or three days before the foul weather is quite over, then expect a continuance of fair weather to follow. 6. In fair weather, when the mercury falls much and low, and thus continues for two or three days before the rain comes, then expect a great deal of wet, and probably high winds. 7. The unſettled motion of the mercury denotes uncertain and changeable weather. 8. You are not ſo ſtrictly to obſerve the words engraved on the plates (though in general it will agree with them) as the mercury's riſing and falling; for if it ſtands at much rain, and then riſes up to changeable, it preſages fair weather; though not to continue ſo long as if the mercury had riſen higher: and ſo, on the contrary, if the mercury ſtood at fair, and falls to changeable, it preſages

Note.

foul weather; though not ſo much of it as if it had ſunk lower.

From theſe obſervations it appears, that it is not ſo much the height of the mercury in the tube that indicates the weather, as the motion of it up and down: wherefore, in order to paſs a right judgment of what weather is to be expected, we ought to know whether the mercury is actually riſing or falling; to which end the following rules are of uſe.

1. If the ſurface of the mercury is convex, ſtanding higher in the middle of the tube than at the ſides, it is generally a ſign that the mercury is then riſing. 2. If the ſurface is concave, it is then ſinking: and, 3. If it is plain, the mercury is ſtationary, or rather if it is a little convex; for mercury being put into a glaſs tube, eſpecially a ſmall one, will naturally have its ſurface a little convex, becauſe the particles of mercury attract one another more forcibly than they are attracted by glaſs. 4. If the glaſs is ſmall, ſhake the tube; and if the air is grown heavier, the mercury will riſe about half the tenth of an inch higher than it ſtood before: if it is grown lighter, it will ſink as much. This proceeds from the mercury's ſticking to the ſides of the tube, which prevents the free motion of it till it is diſengaged by the ſhock: and therefore when an obſervation is to be made by ſuch a tube, it ought always to be ſhaken firſt; for ſometimes the mercury will not vary of its own accord, till the weather it ought to have indicated is preſent.

Here we muſt obſerve, that the above-mentioned phenomena are peculiar to places lying a conſiderable diſtance

tance from the equator; for in the torrid zone, the mercury in the barometer ſeldom either riſes or falls much. In Jamaica, it is obſerved by Sir *William Beeſton*, that the mercury in the morning conſtantly ſtood at one degree below changeable, and at noon ſunk to one degree above rain; ſo that the whole ſcale of variation there was only three-tenths of an inch. At St Helena, too, where Dr. *Halley* made his obſervations, he found the mercury to remain almoſt ſtationary whatever weather happened. Of theſe phenomena, their cauſes, and why the barometer indicates an approaching change of weather, the Doctor gives us the following account:

Dr. Halley's rules and obſervations.

1. In calm weather, when the air is inclined to rain, the mercury is commonly low. 2. In ſerene, good, and ſettled weather, the mercury is generally high. 3 Upon very great winds, though they be not accompanied with rain, the mercury ſinks loweſt of all, with relation to the point of the compaſs the wind blows upon. 4. The greateſt heights of the mercury are found upon eaſterly or north-eaſterly winds. 5. In calm froſty weather the mercury generally ſtands high. 6. After very great ſtorms of wind, when the mercury has been very low, it generally riſes again very faſt. 7. The more northerly places have greater alterations of the barometer than the more ſoutherly. 8. Within the tropics, and near them, thoſe accounts we have had from others, and the obſervations made at St. Helena, make very little or no variation of the height of the mercury in all weathers.

Hence, I conceive, that the principal cauſe of the riſe and fall of the mercury is from the variable winds which are

are found in the temperate zone, and whoſe great inconſtancy, here in England, is notorious.

A ſecond cauſe is, the uncertain exhalation and precipitation of the vapours lodging in the air, whereby it comes to be at one time much more crowded than at another, and conſequently heavier; but this latter depends in a great meaſure upon the former. Now, from theſe principles, I ſhall endeavour to explicate the ſeveral phenomena of the barometer, taking them in the ſame order I have laid them down. Thus,

1. The mercury's being low inclines it to rain, becauſe the air being light, the vapours are no longer ſupported thereby, being become ſpecifically heavier than the medium wherein they floated; ſo that they deſcend towards the earth, and, in their fall, meeting with other aqueous particles, they incorporate together, and form little drops of rain: but the mercury's being at one time lower than another, is the effect of two contrary winds blowing from the place where the barometer ſtands; whereby the air of that place is carried both ways from it, and conſequently the incumbent cylinder of air is diminiſhed, and accordingly the mercury ſinks: as, for inſtance, if in the German ocean it ſhould blow a gale of weſterly wind, and, at the ſame time, an eaſterly wind in the Iriſh ſea; or if in France it ſhould blow a northerly wind, and in Scotland a ſoutherly; it muſt be granted, that *that* part of the atmoſphere impendant over England would thereby be exhauſted and attenuated, and the mercury would ſubſide, and the vapours which before floated in theſe parts of the air of equal gravity with themſelves, would ſink to the earth.

2. The

2. The greater height of the barometer is occaſioned by two contrary winds blowing towards the place of obſervation, whereby the air of other places is brought thither and accumulated; ſo that the incumbent cylinder of air being increaſed both in height and weight, the mercury preſſed thereby muſt needs ſtand high, as long as the winds continue ſo to blow; and then the air being ſpecifically heavier, the vapours are better kept ſuſpended, ſo that they have no inclination to precipitate, and fall down in drops; which is the reaſon of the ſerene good weather which attends the greater heights of the mercury.

3. The mercury ſinks the loweſt of all by the very rapid motion of the air in ſtorms of winds. For the tract or region of the earth's ſurface, wherein the winds rage, not extending all round the globe, that ſtagnant air, which is left behind, as likewiſe that on the ſides, cannot come in ſo faſt as to ſupply the evacuation made by ſo ſwift a current; ſo that the air muſt neceſſarily be attenuated when and where the ſaid winds continue to blow; and that more or leſs according to their violence: add to which, that the horizontal motion of the air being ſo quick, may in all probability take off ſome part of the perpendicular preſſure thereof; and the great agitation of its particles is the reaſon why the vapours are diſſipated, and do not condenſe into drops ſo as to form rain, otherwiſe the natural conſequence of the air's rarefaction.

4. The mercury ſtands higheſt upon the eaſterly and north-eaſterly wind; becauſe in the great Atlantic ocean on this ſide the thirty-fifth degree of north latitude, the winds are almoſt always weſterly or ſouth-weſterly; ſo that whenever here the wind comes up at eaſt and north-

north-eaſt, it is ſure to be checked by a contrary gale as ſoon as it reaches the ocean: wherefore, according to our ſecond remark, the air muſt needs be heaped over this iſland, and conſequently the mercury muſt ſtand high, as often as theſe winds blow. This holds true in this country: but is not a general rule for others, where the winds are under different circumſtances: and I have ſometimes ſeen the mercury here ſo low as twenty-nine inches upon an eaſterly wind; but then it blew exceeding hard; and ſo comes to be accounted for by what was obſerved in the third remark.

5. In calm froſty weather the mercury generally ſtands high; becauſe (as I conceive) it ſeldom freezes, but when the winds come out of the northern and north-eaſtern quarters: or at leaſt unleſs thoſe winds blow at no great diſtance off: For the north parts of Germany, Denmark, Sweden, Norway, and all that tract from whence north-eaſtern winds come, are ſubject to almoſt continual froſt all the winter: and thereby the lower air is very much condenſed, and in that ſtate is brought hitherward by thoſe winds; and, being accumulated by the oppoſition of the weſterly wind blowing in the ocean, the mercury muſt needs be preſt to a more than ordinary height; and as a concurring cauſe, the ſhrinking of the lower parts of the air into leſſer room by cold, muſt needs cauſe a deſcent of the upper parts of the atmoſphere, to reduce the cavity made by this contraction to an equilibrium.

6. After great ſtorms, when the mercury has been very low, it generally riſes again very faſt. I once obſerved it to riſe one inch and a half in leſs than ſix hours, after a long continued ſtorm of ſouth-weſt wind. The reaſon is, becauſe the air being very much rarefied by the great

great evacuations which ſuch continued ſtorms make thereof, the neighbouring air runs in the more ſwiftly to bring it to an equilibrium; as we ſee water runs the faſter for having a greater declivity.

7. The variations are greater in the more northerly places; as at Stockholm greater than at Paris (compared by *M. Paſchall*) becauſe the more northerly parts have uſually greater ſtorms of wind than the more ſoutherly, whereby the mercury ſhould ſink lower in that extreme; and then the northerly winds bringing in the more denſe and ponderous air from the neighbourhood of the pole, and that again being checked by a ſoutherly wind at no great diſtance, and ſo heaped, muſt of neceſſity make the mercury in ſuch caſe ſtand higher in the other extreme.

8. Laſtly, this remark, That there is little or no variation near the equinoctial, does, above all others, confirm the hypotheſis of the variable winds being the cauſe of theſe variations of the height of the mercury; for in the places above-named, there is always an eaſy gale of wind blowing nearly upon the ſame point, viz. E. N. E. at Barbadoes, and E. S. E. at St. Helena; ſo that there being no contrary currents of air to exhauſt or accumulate it, the atmoſphere continues much in the ſame ſtate: however, upon hurricanes, the moſt violent of ſtorms, the mercury has been obſerved very low; but this is but once in two or three years; and it ſoon recovers its ſettled ſtate, about 29½ inches.

To fill the Barometer Tube.

IN order to fill a barometer tube to the greateſt perfection, it is neceſſary to obſerve the following rules: 1. That the tube be at leaſt one fourth of an inch bore; but one third of an inch is better. 2. That the tube ought to be new, and clean within when filled. In order to this, the tube ſhould be hermetically ſealed at both ends, at the glaſs-houſe when made; one end of which may be cut off with a file when you uſe it. 3. The diameter of the ciſtern that holds the mercury, in which the tube is immerſed, ſhould be as large as conveniently may be, that the mercury therein may have nearly at all times the ſame altitude; otherwiſe the index will not be true. 4. The mercury muſt be pure and free from any mixture of tin, lead, or other metal. 5. It ought to be purged from air entirely, as it may be by boiling it, and filling the tube with it, while boiling hot, nearly. 6. The tube muſt be heated hot when filled, to avoid breaking by the boiling mercury. 7. It ſhould be rubbed very hard, to excite the electric virtue, which will expel the particles of air from the ſurface within.

Then take the tube, fig. 7, and nearly fill the ball
Fig. 7. with mercury; after which, place the thumb of your right hand upon the end A, and the fore-finger of your left upon the end B, holding it downwards, and ſhaking it endways, the mercury will run into the tube until it be quite filled; you may then turn it as in the figure, and the mercury will ſink in the tube to B, which will be 29½ inches from the ſurface of the mercury in the ball at A, if the preſſure of the atmoſphere at that time be at changeable, as at Fig. 6. N. B. If any air bubbles ſhould

ſhould happen to be left in the tube after it is filled, you muſt invert it, and place your thumb and fore-finger as before, and gently knock the end B with your finger underneath it, upon a table, while all the air-bubbles have riſen into the ball, then it is perfect; but this operation is never neceſſary, but when the bore of the tube is too ſmall.

The Diagonal Barometer.

A B C, fig. 8, is a tube ſealed at C, immerſed in mercury at A: this tube is perpendicular from A to B, where the ſcale of variation begins; from thence it is bent into C B. This part B C proceeds to the higheſt limit in the ſcale of variation, viz. I C; and conſequently while the mercury riſes from C to I in the common barometer, it will move in this from B to C; and ſo the ſcale will be by this means enlarged in the proportion of B C to I C. Fig. 8.

However, this form being ſubject to a great degree of friction, on account of the obliquity in the part B C; which inclination makes the quickſilver frequently divide into ſeveral parts, requires the trouble of filling the tubes anew too often.

The Horizontal Rectangular Barometer,

CONSISTS of a tube A C D F, fig. 9, ſealed on the upper end A, and bent to a right-angle at D, whence it has the name of the horizontal rectangular barometer. The mercury ſtands in both legs from E to C. The Fig. 9.

ſcale of variation from D to F, is here made of a larger part, and then it is evident, in moving three inches from A to C, it will move through ſo many times 3 inches in the ſmall leg D F, as the bore of D F is leſs than the bore of A C, whence the motion of the mercury at E muſt be extremely ſenſible. This form is liable to the like exceptions, as remarked in that of fig. 8; and, beſides a great degree of friction, and the frequent breaking off of the mercury in the leg E, the part D F being a very ſmall bore, the free motion of the mercury therein muſt be impeded by the attraction of coheſion.

The Wheel Barometer.

Fig. 10. A, fig. 10, repreſents the quickſilver in a glaſs tube, having a large round head or ball, and turned up at bottom B; upon the ſurface of the mercury in the recurved leg, there is then placed a ſhort glaſs tube loaded with mercury, with a ſtring going over a pulley, and is balanced by another weight hanging freely in the air. As the ſurface at A is very large, and that at B very ſmall, the motion of the quickſilver, and conſequently of the ball A, will at bottom be very conſiderable; but as the weight moves up and down, it turns the pulley, and that a hand or index; and by the diviſions of a large graduated circle, the minuteſt variations of the air are plainly ſhewn, if the inſtrument be accurately made, and the friction of the ſeveral parts be inconſiderable.

For refining mercury, &c. fit for the above uſe, ſee th Miſcellaneous Articles.

The

The Air-Gun.

THIS pneumatical inſtrument is an ingenious contrivance, which will drive a bullet with great violence, by means of condenſed air, forced into an iron ball, by a condenſer (repreſented Fig. 11.) At the end a of this inſtrument is a male ſcrew, on which the hollow ball b is ſcrewed, in order to be filled with condenſed air. In the inſide of this ball is a valve, to hinder the air after it is injected from making its eſcape, until it be forced open by a pin, againſt which the hammer of the lock ſtrikes (as at a, Fig. 12.); which then lets out as much air as will drive a ball with conſiderable force to a great diſtance. Fig. 11.

When you condenſe the air in the ball, place your feet on the iron croſs h h, to which the piſton rod d e is fixed; then lift up the barrel c a, by the handles i i, until the piſton at e be brought between o and c; the barrel a c will then be filled with air through the hole o from o to a. Then thruſt down the barrel a c by the handles i i until the piſton e join with the neck of the iron ball at a; the air being thus condenſed between o and a will force open the valve in the ball, and when the handles i i are lifted up again, the valve will cloſe and keep in the air: ſo by rapidly continuing the ſtrokes up and down, the ball will preſently be filled; after which unſcrew the ball off the condenſer, and ſcrew it upon another male ſcrew which is connected with the barrel, and goes through the ſtock of the gun, as repreſented at b, Fig. 12. I have frequently injected 12 dwts. of air into a ball 3¾ inches diameter, with which I diſcharged 15 bullets with conſiderable force.

The

There are many contrivances in conſtructing air-guns: ſome have a ſmall barrel contained within a large one; and the ſpace between the two barrels ſerves for the reception of condenſed air. In theſe ſort a valve is fixed at a, Fig. 12, with a condenſer fixed to the barrel at a and continued through the but-end to c, as a c, Fig. 11, where the piſton rod may be always left in; and when uſed, an iron pin, one foot long, may be put through the hole d. Place your feet on the pin, and the whole gun ſerves inſtead of the handles i i, Fig. 11, to condenſe the air in the barrel.

The magazine air-gun differs from the common one, only by having a ſerpentine barrel, which contains 10 or 12 balls; theſe are brought into the ſhooting barrel ſucceſſively, by means of a lever; and they may be diſcharged ſo faſt as to be nearly of the ſame uſe with ſo many different guns.

HYDRAULICS,

AND

HYDROSTATICS.

DEFINITIONS.

1. HYDRAULICS is the ſcience of fluids, particularly of water, with a ſpecial attention to artificial water-works; and to the laws and motion of fluid bodies.

HYDROSTATICS explain the equilibrium of fluids, or the gravitation of fluids at reſt; and upon removing that equilibrium, motion enſues: and here hydraulics commence.

Hydraulics, therefore, ſuppoſes *Hydroſtatics*; which induces me to begin this Treatiſe with Hydroſtatics.

2. A *Syphon* is a bended tube, as repreſented Plate IX. Fig. 5.

3. A *valve* is a ſort of flap or cover, fixed to a pipe or other body, which, by opening one way only, ſuffers the water to paſs, but not to return.

4. A

4. A *Piſton* is a ſmall cylinder faſtened to the end of a rod, and fitted to the bore of a pipe or hollow cylinder; and frequently contains a valve.

5. The *Hydrometer* is an inſtrument conſtructed to find the ſpecific gravities of fluids, as Fig. 2.

6. The *Hydroſtatic balance* is contrived to ſhew the ſpecific gravities of fluids, and of ſolids, by weighing them in fluids.

APHORISMS.

1. WATER is a ſcentleſs, tranſparent, colourleſs fluid, which, with a certain degree of cold, turns to ice.

Note. Though fluidity is commonly regarded as an eſſential property of water, yet many philoſophers, particularly *Boyle* and *Boerhaave*, conſider it as an adventitious circumſtance, produced by a certain degree of heat; and aſſert its natural ſtate to be that of chryſtalline, as when in ice.

2. Water is one of the conſtituent parts of all bodies: this is proved by diſtillation; for the dryeſt woods, earths, bones, and ſtones pulveriſed, conſtantly yield a certain quantity of water.

3. All fluids, except air, are incompreſſible.

4. Though water is leſs tranſparent than air, it is more penetrative, as it will pervade bodies that air will not: this is evident from paſſing through the pores of a bladder.

5. Water

5. Water diſſolves ſome bodies, as ſalts, and conglutinates others, as bricks, ſtones, bones, &c.

6. Water in its natural ſtate contains the three other elements, fire, earth, and air.

We have already ſaid that water owes its fluidity to heat, and it is evident from many experiments with the air-pump, that it contains no ſmall quantity of air; and the ſediment that is found in all water, except that which is diſtilled, always contains a quantity of earth. From the laſt element it is ſuppoſed that plants derive all the nouriſhment they receive by means of water.

7. The water, in ſeveral tubes that communicate with each other, will ſtand at the ſame height in all of them, whether they be ſmall or great, perpendicular or oblique.

8. The ſurface of water contained in a veſſel will always be even, and parallel to the horizon: but in large bodies of water, as the ſea, or great lakes, the ſurface will not be plain, but ſpherical, as making a part of the terraqueous globe.

9. In a veſſel of water the preſſure of the upper parts on the lower, is in proportion to the depth; and is the ſame at the ſame depth, whatever be the diameter of the veſſel.

10. The preſſure of a fluid upward is equal to its preſſure downward, at any given depth.

11. The bottom and ſides of a veſſel are preſſed by the fluid it contains, in proportion to its height, without any regard to the quantity.

12. If fluids of different gravities be contained in the ſame veſſel, the heavieſt will be at bottom, the lighteſt at top, and the reſt in proportion to their ſpecific gravities.

13. A body that is heavier than an equal quantity of a fluid, will ſink in that fluid; if it be lighter, it will ſwim at the top; but if it be of the ſame gravity, it will neither ſink nor ſwim, but remain ſuſpended in any part of that fluid.

14. A ſolid immerſed in a fluid is preſſed by that fluid on all ſides, in proportion to the height of the fluid above the ſolid. Bodies very deeply immerged may be conſidered as equally preſſed on all ſides.

15. Every ſolid immerſed in a fluid, loſes ſo much of its weight, as is equal to the weight of a quantity of that fluid of the ſame dimenſion with the ſolid.

16. The fluid acquires the weight the ſolid loſes.

Of Fluidity.

Sir Iſaac Newton's definition of a fluid is, *That it is a body yielding to any force impreſſed, and which has its parts very eaſily moved one among another.*

It muſt here be remarked, that this definition ſuppoſes the motion ſpoken of, produced by a partial preſſure; for in the caſe of an incompreſſible fluid, it is demonſtrated by Dr. *Keil*, that under a total or an equal preſſure, it would be impoſſible the yielding body ſhould move.

The

The original and conſtituent parts of fluids are by the moderns conceived to be, particles ſmall, ſmooth, hard, and ſpherical; according to which opinion, every particle is of itſelf a ſolid, or a fixed body; and when conſidered ſingly, is no fluid, but becomes ſo only by being joined with other particles of the ſame kind.

'Tis probable that the particles of fluids are exceeding ſmall, becauſe their texture has never yet been diſcovered by the fineſt microſcope; we judge them to be ſmooth, becauſe they are found eaſily to glide one over another; hard and impenetrable, becauſe no fluid we are acquainted with, the air excepted, is capable of compreſſion: we conceive them to be ſpherical, that they may only touch in ſome points of their ſurfaces; and ſo not only may be the more eaſily moved, but alſo form interſtices or vacancies between them, which may be proved.

Were fluids not compounded of primary particles, formed as above, but made up of one homogeneous ſubſtance, without conſiſtence equally denſe; there would be no difference in their ſpecific gravity, and all fluids would be of the ſame weight, bulk for bulk, which is contrary to experience.

That fluids have vacuities, will appear upon mixing ſalt with water, a certain quantity whereof will be diſſolved, and thereby imbibed, without enlarging the dimenſions. A fluid's becoming more buoyant, is a certain proof that its ſpecific gravity is increaſed, and of conſequence, that many of its vacuities are thereby filled; after which it may ſtill receive a certain quantity of other diſſoluble bodies, the particles whereof are adapted to the vacancies remaining,

without adding any thing to its bulk, though the abſolute weight of the whole fluid be thereby increaſed. This might be demonſtrated by weighing a phial of rain water, critically, with a nice balance: pour this water into a cup, and add ſalt to it: refund of the clear liquor, what will again fill the phial; an increaſe of weight will be found under the ſame dimenſions, from a repletion, as has been ſaid, of the vacuities of the freſh water with ſaline particles.

And as fluids have vacuities, or are not perfectly denſe; it is alſo probable, that they are compounded of ſmall ſpheres of different diameters, whoſe interſtices may be ſucceſſively filled with apt materials for that purpoſe: and the ſmaller theſe interſtices are, the greater will the gravity of the fluid always be.

For inſtance: ſuppoſe a barrel be filled with bullets in the moſt compact manner, a great many ſmall ſhot may afterwards be placed in the interſtices of thoſe balls; the vacuities of the ſhot may then be repleniſhed with a certain quantity of ſea ſand; the interſtices of the ſand may again be filled with water; and thus may the weight of the barrel be greatly augmented, without increaſing the general quantity: now this being true with regard to ſolids, is applicable alſo to fluids. For inſtance, river-water will diſſolve a certain quantity of ſalt; after which it will receive a certain quantity of ſugar, and after that a certain quantity of alum, and perhaps other diſſoluble bodies, and not increaſe its firſt dimenſions.

Was all ſpace abſolutely full of matter, this matter muſt either be fluid or fixed. Was it fixed, there could poſſibly be

be no motion therein, as is plain both from reaſon and experience; it muſt therefore be fluid. But a fluid without vacuities will be denſer, and conſequently heavier, than all fluids; and if denſer, all bodies will emerge, and ſwim therein, by hydroſtatical laws, nor could there be ſuch a thing as gravity. But as gravity cannot be denied, all ſpace therefore cannot be filled, even with a fluid.

Borelli has demonſtrated, that the conſtituent parts of fluids are not fluid; but conſiſtent bodies; and that the elements of all bodies are perfectly firm and hard. The incompreſſibility of water, proved by the Florentine experiment, is a ſufficient evidence alſo, that each primary particle or ſpeckle thereof is a perfect and impenetrable ſolid.

This famous experiment was firſt attempted by the great Lord Verulam, who incloſed a quantity of water in lead, and found that it inclined rather to make its way through the pores of the metal, than be reduced to leſs compaſs by any force that could be applied. At Florence this experiment was afterwards made more accurately with a globe of ſilver: this being filled with water and well cloſed, was gently preſſed, upon which a ſmall quantity of water iſſued from the globe in form of dew.

Sir Iſaac Newton and others have attempted it ſince with globes made of gold and other metals, and with equal ſucceſs. Mr. Canton has obſerved in ſome experiments made by him, that the different ſtate of the air makes water to be compreſſed at ſome times more than at others: but though naturally it may be thus affected, we cannot by any artificial method compreſs it, for as ſoon as the cold is over, it will return to its former bulk.

The Hydroſtatic Balance.

THOUGH the hydrometer is the moſt convenient inſtrument for meaſuring the ſpecific weights of fluids, yet for a meaſure of the ſpecific gravity of all ſubſtances, we muſt have recourſe to the hydroſtatic balance: which is conſtructed in various forms; but we ſhall content ourſelves here with deſcribing that which appears of all others the moſt accurate.

Plate IX. Fig. 1.


V C G (Plate IX. fig. 1.) is the ſtand or pillar of this hydroſtatic balance, which is to be fixed in a table. From the top A, hangs, by two ſilk ſtrings, the horizontal bar B B, from which is ſuſpended by a ring i, the fine beam of a balance b: which is prevented from deſcending too low on either ſide by the gently ſpringing piece l x y z, fixed on the ſupport M. The harneſs is annulated at o, to ſhow diſtinctly the perpendicular poſition of the examen, by the ſmall pointed index fixed above it.

The ſtrings by which the balance is ſuſpended, paſſing over two pullies, one on each ſide of the piece at A, go down to the bottom on the other ſide, and are hung over the hook at v; which hook, by means of a ſcrew P, is moveable, about one inch and one quarter, backward and forward, and therefore the balance may be raiſed or depreſſed ſo much. But if a greater elevation or depreſſion be required, the ſliding piece S, which carries the ſcrew P, is readily moved to any part of the ſquare braſs rod V K, and fixed by means of a ſcrew.

The

HYDROSTATICS.

PLATE IX.

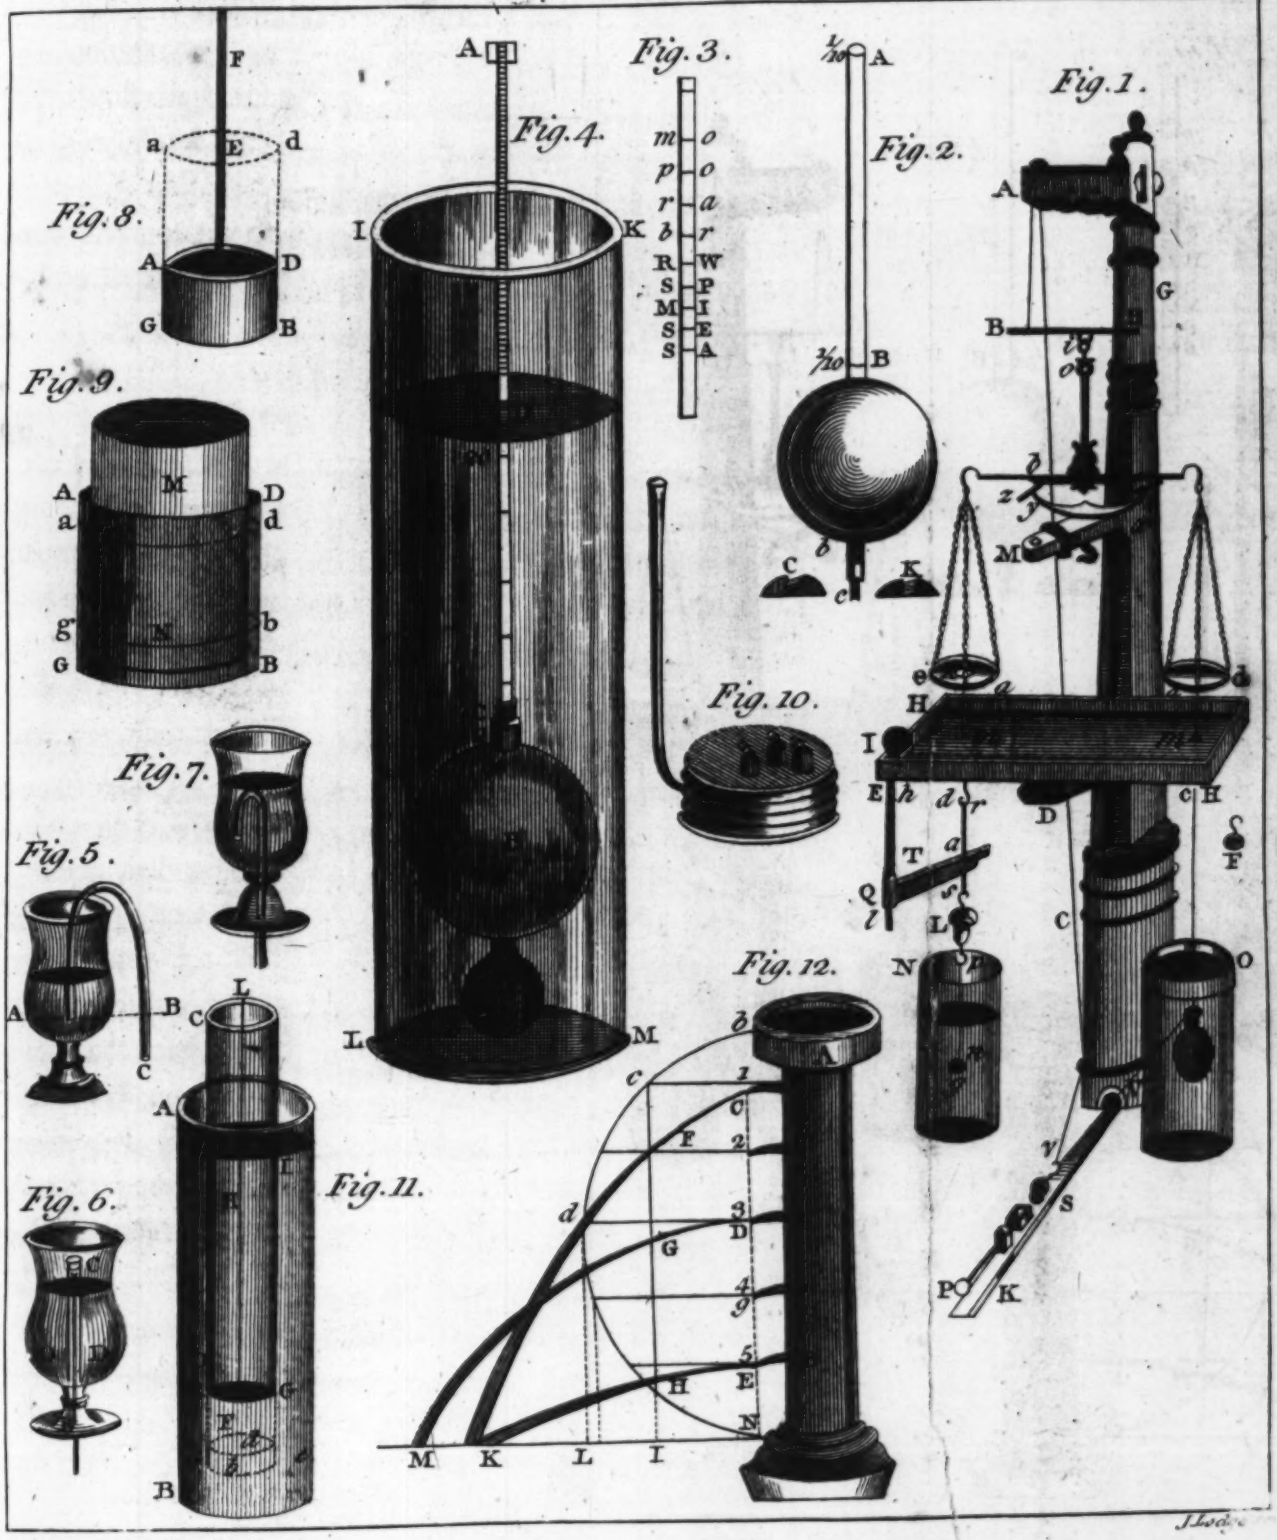

Platt
Fig.



The motion of the balance being thus adjuſted, the reſt of the apparatus is as follow. H H is a ſmall board, fixed upon the piece D, under the ſcales d and e, and is moveable up and down in a long ſlit in the pillar above C, and faſtened at any part by a ſcrew behind. From the point in the middle of the bottom of each ſcale hangs, by a fine hook, a braſs wire a d and a c; theſe paſs through two holes m m, in the table. To the wire a d is ſuſpended a curious cylindric wire r s, perforated at each end for that purpoſe: this wire r s is covered with paper, graduated by equal diviſions, and is about five inches long.

In the corner of the board at E, is fixed a braſs tube, on which a round wire h l is ſo adapted as to move neither too tight nor too free, by its flat head I. Upon the lower part of this moves another tube Q, which has ſufficient friction to make it remain in any poſition required: to this is fixed an index T, moving horizontally when the wire h l is turned about, and therefore may be eaſily ſet to the graduated wire r s. To the lower end of the wire r s hangs a weight L, and to that a wire p n, with a ſmall braſs ball g, about $\frac{1}{4}$ of an inch diameter. On the other ſide, to the wire a c, hangs a large glaſs bubble R, by a horſe-hair.

Let us firſt ſuppoſe the weight L taken away, and the wire p n ſuſpended by S; and on the other ſide, let the bubble R be taken away, and the weight F ſuſpended at c, in its room. This weight F we ſuppoſe to be ſufficient to keep the ſeveral parts hanging to the other ſcale in equilibrium; at the ſame time that the middle point of the wire p n is at the ſurface of the water in the veſſel N. The wire p n is to be of ſuch a ſize, that the length of one inch ſhall weigh four grains.

Now

Now it is evident, ſince braſs is eight times heavier than water, that for every inch the wire ſinks in the water it will become half a grain lighter, and half a grain heavier for every inch it riſes out of the water: conſequently by ſinking two inches below the middle point, or riſing two inches above it, the wire will become one grain lighter or heavier. Therefore, if when the middle point is at the ſurface of the water in equilibrium, the index T be ſet to the middle point a of the graduated wire r s, and the diſtance on each ſide a r and a s contains a hundred equal parts; then, if in weighing bodies the weight is required to the hundredth part of a grain, it may be eaſily had by proceeding in the following manner.

Let the body to be weighed be placed in the ſcale d. Put the weight X in the ſcale e, and let this be ſo determined that one grain more ſhall be too much, and one grain leſs too little. Then the balance being moved gently up or down, by the ſcrew P, till the equilibrium be nicely ſhewn at o; if the index T be at the middle point a of the wire r s, it ſhews that the weights put into the ſcale e, are juſt equal to the weight of the body. By this method we find the abſolute weight of the body; the relative weight is found by weighing it hydroſtatically in water, as follows.

Inſtead of putting the body into the ſcale e, as before, let it hang with the weight F, at the hook c, by a horſe-hair, as at R, ſuppoſing the veſſel O of water were away. The equilibrium being then made, the index T ſtanding between a and r, at the thirty-ſixth diviſion, ſhews the weight of the body put in to be 1095,36 grains. As it thus hangs let it be immerſed in the water of the veſſel O, and it will become much lighter: the ſcale e will deſcend till the beam

of

of the balance reſt on the ſupport x. Then ſuppoſe 100 grains put in the ſcale d, reſtore the equilibrium preciſely, ſo that the index T ſtand at the thirty-ſixth diviſion above a; it is evident that the weight of an equal bulk of water would, in this caſe, be exactly a hundred grains.

After a like manner this balance may be applied to find the ſpecific gravities of fluids, as is eaſy to conceive from what has been ſaid.

The Hydrometer.

THIS is the moſt eligible of all inſtruments for finding the ſpecific gravity of fluids only, as well for eaſe as expedition.

The globe of the hydrometer ſhould be made of copper, for ivory imbibes ſpirituous liquors, and thereby alters their gravity, and glaſs requires an attention that is incompatible with expedition. The moſt ſimple hydrometer conſiſts of a copper ball B b, to which is ſoldered a braſs wire A B, one quarter of an inch thick. The upper part of this wire being filed flat, is marked *proof*, at m, fig. 3, becauſe it ſinks exactly to that mark in proof ſpirits. There are two other marks at A and B, fig. 2, to ſhew whether the liquor be 1-tenth above, or below proof, according as the hydrometer ſinks to A, or emerges to B, when a braſs weight as C or K, is ſcrewed to its bottom c. There are other weights to ſcrew on, which ſhew the ſpecific gravity of different fluids, quite down to common water.

Plate IX. Fig. 2, and 3.

The round part of the wire above the ball, may be marked ſo as to repreſent river water when it ſinks to R W, fig. 3, the weight which anſwers to that water being then ſcrewed on; and when put into ſpring water, mineral water, ſea water, and water of ſalt ſprings, it will gradually riſe to the marks S P, M I, S E, S A; on the contrary, when it is put into Briſtol water, rain water, port wine, and mountain wine, it will ſucceſſively ſink to the marks b r, r a, p o, m o. Inſtruments of this kind are ſometimes called areometers.

There is another ſort of hydrometer that is calculated to aſcertain the ſpecific gravity of fluids to the greateſt preciſion poſſible, and which conſiſts of a large hollow ball B, fig. 4, with a ſmaller bolt b ſcrewed on to its bottom, partly filled with mercury, or ſmall ſhot, in order to render it but little ſpecifically lighter than water. The larger ball has alſo a ſhort neck at C, into which is ſcrewed the graduated braſs wire A C, which, by a ſmall weight at A, cauſes the body of the inſtrument to deſcend in the fluid with part of the ſtem.

Fig. 4.

When this inſtrument is ſwimming in the liquor contained in the jar I L M K, the part of the fluid diſplaced by it, will be equal in bulk to the part of the inſtrument under water, and equal in weight to the whole inſtrument. Now, ſuppoſe the weight of the whole to be four thouſand grains, it is evident we can by this means compare the different dimenſions of 4000 grains of ſeveral ſorts of fluids. For if the weight at A be ſuch, as will cauſe the ball to ſink in rain water, till its ſurface come to the middle point of the ſtem 20, and after that, if it be immerſed in common ſpring water, and the ſurface be obſerved to ſtand

at one tenth of an inch below the middle point 20, it is apparent that the ſame weight of each water differs only in bulk, by the magnitude of one tenth of an inch in the ſtem.

Now, ſuppoſe the ſtem to be ten inches long and weigh 100 grains, then every tenth of an inch will weigh one grain; and as the ſtem is of braſs, which is about eight times heavier than water, the ſame bulk of water will be equal to 1-8th of a grain, and conſequently to the 1-8th of 1-4 thouſandth part, that is, 1-32 thouſandth part of the whole bulk. This inſtrument is capable of ſtill greater preciſion, by making the ſtem or neck conſiſt of a flat thin ſlip of braſs, inſtead of one that is cylindrical: for by this means we increaſe the ſurface, which is the moſt requiſite circumſtance, and diminiſh the ſolidity, which neceſſarily renders the inſtrument ſtill more accurate.

To adapt this inſtrument to all purpoſes, there ſhould be two ſtems to ſcrew on and off, in a ſmall hole at a. One ſtem ſhould be a ſmooth thin ſlip of braſs, or rather ſteel, like a watch ſpring ſet ſtrait, ſimilar to that we have juſt mentioned, on one ſide of which is to be the ſeveral marks or diviſions to which it will ſink in different ſorts of water; as rain, river, ſpring, ſea, and ſalt ſpring waters, &c. and on the other ſide you may mark the diviſions to which it ſinks in various lighter fluids, as hot Bath water, Briſtol water, Lincomb water, Cheltenham water, port wine, mountain, madeira, and other ſorts of wines. But here the weight at A on the top, muſt be a little leſs than before, when it was uſed for heavier waters.

But in trying the ſtrength of the ſpirituous liquors a common cylindric ſtem will do beſt, becauſe of its ſtrength and ſteadineſs: and this ought to be ſo contrived, that when immerſed in what is called proof ſpirit, the ſurface of the ſpirit may be upon the middle point 20; which is eaſily done by duly adjuſting the ſmall weight A, on the top, and making the ſtem of ſuch a length, that when immerſed in water, it may juſt cover the ball and riſe to a; but when immerſed in pure ſpirit, it may riſe to the top A. Then by dividing the upper and lower parts A 20, and a 20, into ten equal parts each, when the inſtrument is immerſed in any ſort of ſpirituous liquor, it will immediately ſhew how much it is above or below proof.

Proof ſpirit conſiſts of half water, and half pure ſpirit, that is ſuch as when poured on gunpowder, and ſet on fire, will burn all away; and permits the powder to take fire and flaſh, as in open air. But if the ſpirit be not ſo highly rectified, there will remain ſome water, which will make the powder wet, and unfit to take fire. Proof ſpirit of any kind weighs ſeven pounds twelve ounces per gallon.

The common method of ſhaking the ſpirits in a phial, and raiſing a head of bubbles, to judge by their manner of riſing or breaking, whether the ſpirit be proof or near it, is very fallacious. There is no way ſo certain, and at the ſame time ſo eaſy and expeditious, as this by the hydrometer: which will infallibly demonſtrate the difference of bulks, and conſequently the ſpecific gravities in equal weights of ſpirits, to the thirty, forty, or fifty thouſandth part of the whole, which is a degree of accuracy no one can wiſh to exceed.

My friend Mr. Dicas of Liverpool has obtained his Majeſty's letters patent for the compleateſt hydrometer I have yet ſeen.

On the Syphon.

IF a ſmall ſyphon, whoſe legs are of equal length, be filled with water, and turned downward, the fluid will not run off, but remain ſuſpended therein, ſo long as it is held exactly level: but when an inclination to either leg is given, whereby one in effect is made ſhorter than the other, the water will ſhoot out by the longer leg.

The air is a fluid whoſe denſity near the ſurface of the earth is experimentally found to be to that of water, at a medium, as 1 to 850; ſo that 850 gallons of air, near the earth weigh as much as one gallon of water. Now, according to the nature of all other fluid bodies, the air preſſes the ſurface of all things expoſed to it every way equally. When therefore the legs of the ſyphon, equal in length, are turned down, the weight of the atmoſphere above being kept off by the machine, the under air, bearing againſt and repreſſing the water, endeavouring to fall out of either of them, with equal force, keeps it in ſuſpence, and prevents its motion. But when by inclining it to either ſide, we in effect ſhorten one of its legs, and prolong the other, an advantage is given to the weightier fluid to preponderate or over-weigh; the water then begins to deſcend, and by its continuity brings away the whole.

And to obſerve how ſmall an inclination will ſerve this purpoſe, one need only take a couple of jars full of water, and

and hang a ſmall ſyphon, whoſe legs are of equal length, upon the edge of one; the external leg whereof will, from the ſloping of the jar, naturally incline a little, and the ſyphon will ſoon begin to act, by the attraction of coheſion before-mentioned; then taking it on the edge of the other jar, the like will immediately happen: and thus reciprocally may the effect be produced, as often and as ſuddenly as you pleaſe.

And hence the reaſon why in practice the legs of the ſyphon are uſually made of unequal lengths; and why the ſhorter leg is put into the liquor, and the fluid decanted by the other, will in part appear.

Fig. 5. It is evident from what has been ſaid, that the two legs of the ſyphon being of equal length in the plane A B, are there equally repreſſed by the atmoſphere; and was the crane filled with liquor only to that height, and held level, no motion of the fluid would follow, till an advantage by inclining it ſhould be given as before ſaid. Inſtead of which inclination a length of pipe, of ſome inches perhaps, as from B to C in the figure, is commonly added to theſe machines, which, previous to the operation, is ordinarily filled as well as the reſt with a groſs fluid, many degrees heavier than a like quantity of air, wherewith it is then compared; by the gravity whereof the oppoſite ſide becomes greatly over-balanced: and therefore liquors are by this machine uſually decanted with a good deal of rapidity.

Of the Syphon diſguiſed.

A Syphon may be diſguiſed in a cup, from which no liquor will flow till the fluid is raiſed therein to a certain height; but when the efflux is once begun, it will continue till the veſſel is emptied. For inſtance: Fig. 6 is a cup, in the center whereof is fixed a glaſs pipe A, continued through the bottom at B, over which is put another glaſs tube, made air tight at top by means of the cork at C, but left ſo open at foot, by holes made at D, that the water may freely riſe between the tubes as the cup is filled. Till the fluid in the cup ſhall have gained the top of the inmoſt pipe at A, no motion will appear: the air however from between the two pipes, being in the mean time extruded, by the riſe of the denſer fluid, and paſſing down the inner tube, will get away at bottom, and the water, as ſoon as the top of the incloſed tube ſhall be covered thereby, will very ſoon follow, and continue to riſe in this machine, as in the ſyphon, till the whole is run off. Fig. 6.

This is called by ſome a *Tantalus* cup, and to humour the thought, a hollow figure is ſometimes put over the inner tube, of ſuch length, that when the fluid is got nearly up to the lips of the man, the ſyphon may begin to act and empty the cup.

This is in effect no other than if the two legs of the ſyphon were both either in the veſſel, as in Fig. 7, into which the water poured will riſe in the ſhorter leg of the machine, by its natural preſſure upwards, to its own level; and when it ſhall have gained the bend of the ſyphon, it will come away by the longer leg, as already deſcribed. Fig. 7.

The

and hang a ſmall ſyphon, whoſe legs are of equal length, upon the edge of one; the external leg whereof will, from the ſloping of the jar, naturally incline a little, and the ſyphon will ſoon begin to act, by the attraction of coheſion before-mentioned; then taking it on the edge of the other jar, the like will immediately happen: and thus reciprocally may the effect be produced, as often and as ſuddenly as you pleaſe.

And hence the reaſon why in practice the legs of the ſyphon are uſually made of unequal lengths; and why the ſhorter leg is put into the liquor, and the fluid decanted by the other, will in part appear.

Fig. 5. It is evident from what has been ſaid, that the two legs of the ſyphon being of equal length in the plane A B, are there equally repreſſed by the atmoſphere; and was the crane filled with liquor only to that height, and held level, no motion of the fluid would follow, till an advantage by inclining it ſhould be given as before ſaid. Inſtead of which inclination a length of pipe, of ſome inches perhaps, as from B to C in the figure, is commonly added to theſe machines, which, previous to the operation, is ordinarily filled as well as the reſt with a groſs fluid, many degrees heavier than a like quantity of air, wherewith it is then compared; by the gravity whereof the oppoſite ſide becomes greatly over-balanced: and therefore liquors are by this machine uſually decanted with a good deal of rapidity.

Of the Syphon diſguiſed.

A Syphon may be diſguiſed in a cup, from which no liquor will flow till the fluid is raiſed therein to a certain height; but when the efflux is once begun, it will continue till the veſſel is emptied. For inſtance: Fig. 6 is a cup, in the center whereof is fixed a glaſs pipe A, continued through the bottom at B, over which is put another glaſs tube, made air tight at top by means of the cork at C, but left ſo open at foot, by holes made at D, that the water may freely riſe between the tubes as the cup is filled. Till the fluid in the cup ſhall have gained the top of the inmoſt pipe at A, no motion will appear: the air however from between the two pipes, being in the mean time extruded, by the riſe of the denſer fluid, and paſſing down the inner tube, will get away at bottom, and the water, as ſoon as the top of the incloſed tube ſhall be covered thereby, will very ſoon follow, and continue to riſe in this machine, as in the ſyphon, till the whole is run off. Fig. 6.

This is called by ſome a *Tantalus* cup, and to humour the thought, a hollow figure is ſometimes put over the inner tube, of ſuch length, that when the fluid is got nearly up to the lips of the man, the ſyphon may begin to act and empty the cup.

This is in effect no other than if the two legs of the ſyphon were both either in the veſſel, as in Fig. 7, into which the water poured will riſe in the ſhorter leg of the machine, by its natural preſſure upwards, to its own level; and when it ſhall have gained the bend of the ſyphon, it will come away by the longer leg, as already deſcribed. Fig. 7.

The

The Hydroſtatical Paradox.

THE hydroſtatical paradox, as by ſome it is called, depends on the equal preſſure of the parts of fluids every where at the ſame depth. It is this: any quantity of fluid, however ſmall, may be made to counterpoiſe and ſuſtain any weight, how large ſoever.

Fig. 8. Let A B D G repreſent a cylindrical veſſel, to the inſide of which is fitted the cover C, which, by means of leather at the edge, will eaſily ſlide up and down in the internal cavity, without permitting any water to paſs between its edges and the ſurface of the cylinder. In the cover is inſerted the ſmall tube C F, which is open at top, and communicates with the inſide of the cylinder beneath the cover at C. The cylinder is filled with water and the cover put on. Then, if the cover be loaded with the weight, ſuppoſe of a pound, it will be depreſſed, the water will riſe in the tube to E, and the weight will be ſuſtained. If another pound be added, the water will riſe to F, and the weight will be ſuſtained, and ſo forth, according to the weight added, and the length of the tube. Now the weight of the water in the tube is but a few grains, yet its lateral preſſure ſerves to ſuſtain as much as the weight of a column of water, whoſe baſe is equal to that of the cylinder, and height equal to that in the tube. Thus, the column E C produces a preſſure in the water contained in the cylinder, equal to what would have been produced by the column A a d D; and as this preſſure is exerted every way equally, the cover will be preſſed upwards with a force equal to the weight of A a d D; conſequently if A a d D would weigh a pound, E C will ſuſtain a pound. And the like of other heights

heights and weights. And by diminiſhing the diameter of the tube, any quantity of water, how ſmall ſoever, will in theory ſuſtain any weight, however large.

The ſame may be ſhewn ſimpler: thus, let A G B D repreſent a hollow cylinder of wood, which nearly fills the cavity. In the cylinder, ſuppoſe a little water, whoſe ſurface is g b; then, if the wooden cylinder be put into the hollow one, the water will riſe between the ſurfaces to a and d, and the wood will be ſuſtained floating. The nearer the wooden cylinder approaches to the ſize of the cavity, the leſs water is neceſſary for the experiment. Fig. 9.

The Hydroſtatic Bellows

IS perhaps the beſt machine in the world for demonſtrating the upward preſſure of fluids. It conſiſts of two thick oval boards, each about 16 inches broad, and 18 inches long, covered with leather, to open and ſhut like a common bellows, but without valves; only a pipe about three feet high is fixed into the bellows. Let ſome water be poured into the pipe, which will run into the bellows, and ſeparate the boards a little: then lay three weights, each weighing 100 pounds, upon the upper board, and pour more water into the pipe, which will run into the bellows, and raiſe up the board with all the weights upon it; and if the pipe be kept full until the weights are raiſed as high as the leather which covers the bellows will allow them, the water will remain in the pipe, and ſupport all the weights, even though it ſhould weigh no more than a quarter of a Fig. 10.

pound, and they 300 pounds: nor will all their force be able to cauſe them to deſcend and force the water out at the top of the pipe.

The reaſon of this will be made evident, by conſidering what has been already ſaid of the reſult of the preſſure of fluids of equal heights without any regard to the quantities. For, if the hole be made in the upper board, and a tube be put into it, the water will riſe in the tube to the ſame height that it does in the pipe; and would riſe as high (by ſupplying the pipe) in as many tubes as the board could contain holes. Now, ſuppoſe only one hole to be made in any part of the board, of any equal diameter with the bore of the pipe, and that the pipe holds juſt one quarter of a pound of water; if a perſon claps his finger upon the hole, and the pipe be filled with water, he will find his finger preſſed upward with a force equal to a quarter of a pound; and as the ſame preſſure is equal upon all equal parts of the board, each part whoſe area is equal to the area of the hole, will be preſſed upward with a force equal to that of a quarter of a pound; the ſum of all which preſſures againſt the under ſide of an oval board 16 inches broad and 18 inches long, will amount to 300 pounds; and therefore, ſo much weight will be raiſed up and ſupported by a quarter of a pound of water in the pipe.

How a man may raiſe himſelf upwards by his breath.

Hence, if a man ſtands upon the upper board, and blows into the bellows through the pipe B, he will raiſe himſelf upward upon the board: and the ſmaller the bore of the pipe is, the eaſier he will be able to raiſe himſelf. And then, by clapping his finger on the top of the pipe, he can ſupport himſelf as long as he pleaſes, provided the bellows be air-tight, ſo as not to loſe what is blown into it.

Upon

Upon this principle of the upward preſſure of fluids, a piece of lead may be made to ſwim in water, by immerſing it to a proper depth, and keeping the water from getting above it. Let C D be a glaſs tube open throughout, and E F G a flat piece of lead, exactly fitted to the lower end of the tube, not to go within it, but for it to ſtand upon, with a wet leather between the lead and the tube to make cloſe work. Let this leaden bottom be half an inch thick, and held cloſe to the tube, by pulling the packthread I H L upward at L with one hand, whilſt the tube is held in the other by the upper end C. In this ſituation, let the tube be immerſed in water in the glaſs veſſel A B, to the depth of ſix inches below the ſurface of the water at K: and then the leaden bottom E F G will be plunged to the depth of ſomewhat more than eleven times its own thickneſs: holding the tube at that depth, you may let go the thread at L, and the lead will not fall from the tube, but will be kept to it by the upward preſſure of the water below it, occaſioned by the height of the water at K above the level of the lead: for as lead is 1,133 times as heavy as its bulk of water, and is in this experiment immerſed to a depth ſomewhat more than 1,133 times its thickneſs, and no water getting into the tube between it and the lead, the column of water E a b c G below the lead, is preſſed upward againſt by the water K D E G L all around the tube; which water being a little more than 1,133 times as high as the lead is thick, is ſufficient to balance and ſupport the lead at the depth K E. If a little water be poured into the tube upon the lead, it will increaſe the weight upon the column of water under the lead, and cauſe the lead to fall from the tube to the bottom of the glaſs veſſel, where it will lie in the ſituation b d. Or if the tube be raiſed a little in the water, the lead will fall by its own weight, which will then be too

How lead may be made to ſwim in water.

Fig. 11.

great for the preſſure of the water round the tube, upon the column of water below it.

How light wood may be made to lie at the bottom of water. Fig. 11.

Let two pieces of wood be planed quite flat, ſo as no water may get between them when they are put together: let one of the pieces, as b d, be cemented to the bottom of the veſſel A B, and the other piece be laid flat and cloſe upon it, and held down to it by a ſtick, whilſt water is poured into a veſſel; then remove the ſtick, and the upper piece of wood will not riſe from the lower one; for as the upper one is preſſed down, both by its own weight and the weight of all the water over it, whilſt the contrary preſſure of the water is kept off by the wood under it, it will lie as ſtill as a ſtone would do in its place. But if it be raiſed ever ſo little at any edge, ſome water will then get under it, which being acted upon by the water above, will immediately preſs it upward; and as it is lighter than its bulk of water, it will riſe and float upon the ſurface of the water.

All fluids weigh juſt as much in their own elements as they do in open air. To prove this by experiment, let as much ſhot be put into a phial as, when corked, will make it ſink in water: and being thus charged, let it be weighed firſt in the air, and then in water, and the weights in both caſes wrote down. Then as the phial hangs ſuſpended in water, and counterpoiſed, pull out the cork, that water may run into it, and it will deſcend and pull out that end of the beam. This done, put as much weight into the oppoſite ſcale as will reſtore the equipoiſe; which weight will be found to anſwer exactly to the additional weight of the phial when it is again weighed in air with the water in it.

The velocity with which water ſpouts out at a hole in the ſide or bottom of a veſſel, is as the ſquare root of the

the depth or diſtance of the hole below the ſurface of the water. For, in order to make double the quantity of a fluid run through one hole as through another of the ſame ſize, it will require four times the preſſure of the other, and therefore muſt be four times the depth of the other below the ſurface of the water: and for the ſame reaſon three times the quantity running in an equal time through the ſame ſort of hole, muſt run with three times the velocity; and conſequently muſt be nine times as deep below the ſurface of the fluid, and ſo on. To prove this by experiment, let two pipes, C and g, of equal ſized bores be fixed into the ſide of the veſſel A B, the pipe g being four times as deep below the ſurface at b in the veſſel as the pipe C is; and whilſt theſe pipes run, let water be conſtantly poured into the veſſel, to keep the ſurface ſtill at the ſame height. Then, if a cup that holds a pint be placed ſo as to receive the water that ſpouts from the pipe C, and at the ſame moment a cup that holds a quart be ſo placed as to receive the water that ſpouts from the pipe g, both cups will be filled at the ſame time by their reſpective pipes.

The velocity of ſpouting water.

Fig. 12.

The horizontal diſtance to which a fluid will ſpout from a horizontal pipe, in any part of the ſide of an upright veſſel below the ſurface of the fluid, is equal to twice the length of a perpendicular to the ſide of the veſſel, drawn from the mouth of the pipe to a ſemicircle deſcribed upon the altitude of the fluid; and therefore, the fluid will ſpout to the greateſt diſtance poſſible from a pipe whoſe mouth is at the center of the ſemicircle,—becauſe a perpendicular to its diameter (ſuppoſed parallel to the ſide of the veſſel) drawn from that point, is the longeſt that can poſſibly be drawn from any

The horizontal diſtance to which water will ſpout from pipes.

any part of the diameter to the circumference of the ſemicircle. Thus, if the veſſel A B be full of water, the horizontal pipe D be in the middle of its ſide, and the ſemicircle N d c b be deſcribed upon D as ac enter, with the radius or ſemi-diameter D g N or D f b, the perpendicular D d to the diameter N D b is the longeſt that can be drawn from any part of the diameter to the circumference N d c b. And if the veſſel be kept full, the jet G will ſpout from the pipe D to the horizontal diſtance N M, double the length of the perpendicular D d. If two other pipes, as C and E, be fixed into the ſide of the veſſel at equal diſtances above and below the pipe D, the perpendicular, C c and E c, from theſe pipes to the ſemicircle will be equal: and the jets F and H ſpouting from them, will each go to the horizontal diſtance N K; which is double the length of either of the equal perpendiculars C c or E H.

Of Suction by Machines.

THE quantity of the air's preſſure may be demonſtrated either by experience on the pump itſelf, or by its equipoiſing, and at a medium ſuſtaining 29 and a half inches of mercury, a fluid near fourteen times heavier than water, in the barometer. And that whereby we know that the air's preſſure on the ſurface of the fluid cauſes the water to riſe in the pump, and become certain that it proceeds from no property, power, or efficacy in ſuction, is, that in the air, water, and even a fluid ſo denſe as mercury, may be raiſed by proper machines; but if the air's preſſure be removed, it cannot be raiſed at all; as may be ſhewn by an exhauſting ſyringe, commonly termed a ſucking ſyringe, to diſtinguiſh it from a forcing

a forcing or injecting one, or by a common pump. Let this be fixed to a tranſparent tube, and the lower end thereof put into a jar of mercury, incloſed within a tall receiver; before the air is exhauſted, if the piſton be raiſed, the mercury will immediately follow: after it is exhauſted no ſuch effect will appear. Experiment

This being determined and certain, all we are to underſtand by ſuction is, that whenever by any mechanical contrivance the preſſure of the air is in any place abated, the adjacent matter, urged on by the weight of the atmoſphere, will tend thither; and if that matter be fluid, it will riſe ſo far above its common level, till by its abſolute weight, a juſt equality is made, to preſerve the equilibrium which ought everywhere to exiſt by the eſtabliſhed laws of nature.

Before *Galileo*'s time, philoſophers fancied this riſe of water and other fluids, to be the reſult of nature's *abborring a vacuum*. Not to cavil with the term *abbor*, which can only properly be applied to animal affection; but to take it as it was probably intended, in a metaphorical ſenſe, we may reaſonably enquire how nature came to abhor a vacuum in the caſe before us, to the height of between 30 and 40 feet from the ſurface of the earth, and no farther? Had ſhe abſolutely abhorred a vacuum, this abhorrence would have been indefinite; and water, upon this principle, might have been raiſed 3000 as well as 30 feet high. But this is otherwiſe in fact; and by experience we find that nature has no antipathy to a vacuum; but that in general, *one heavy body only riſes when another ſuperior in weight deſcends*.

The riſe of water in the ſucking-pump, by the general preſſure of the atmoſphere incumbent on the ſurface

of

of the water in the well, a preſſure not to be excluded from the bowels of a body ſo porous as the earth, being thus ſettled, the parts of this machine, with the manner in which they act, will next come under conſideration.

On the Pump.

THIS uſeful piece of mechaniſm was firſt invented by *Cteſebes*, a mathematician of Alexandria, about 120 years before Chriſt. When the air's preſſure came afterwards to be known, it was much improved, and is now brought to a great degree of perfection.


Of this machine there are ſimply three kinds, viz. the ſucking, the forcing, and the lifting pump. By the two laſt, water may be raiſed to any height with an adequate apparatus and ſufficient power: by the former, it may by the general preſſure of the atmoſphere on the ſurface of the well-water, be raiſed no more than 33 feet, as was before hinted, though in practice it is ſeldom applied to the raiſing it much above 28; becauſe from the variations obſerved on the barometer, it is apprehended that the air may on certain occaſions be ſomething lighter than 33 feet of water; and whenever that ſhall happen, for want of the counterpoiſe, this pump may fail in its performance.


On the Sucking-Pump.

Plate X. Fig. 1. THE common and moſt uſual pump, conſiſts of a pipe open at both ends, in which there is a ſliding piſton as large as the bore, which by means of the hand, or ſome other contrivance, may be moved up and down without ſuffering any air to come between it and the ſides of the pipes; which is alſo called the barrel.

If

PLATE X.

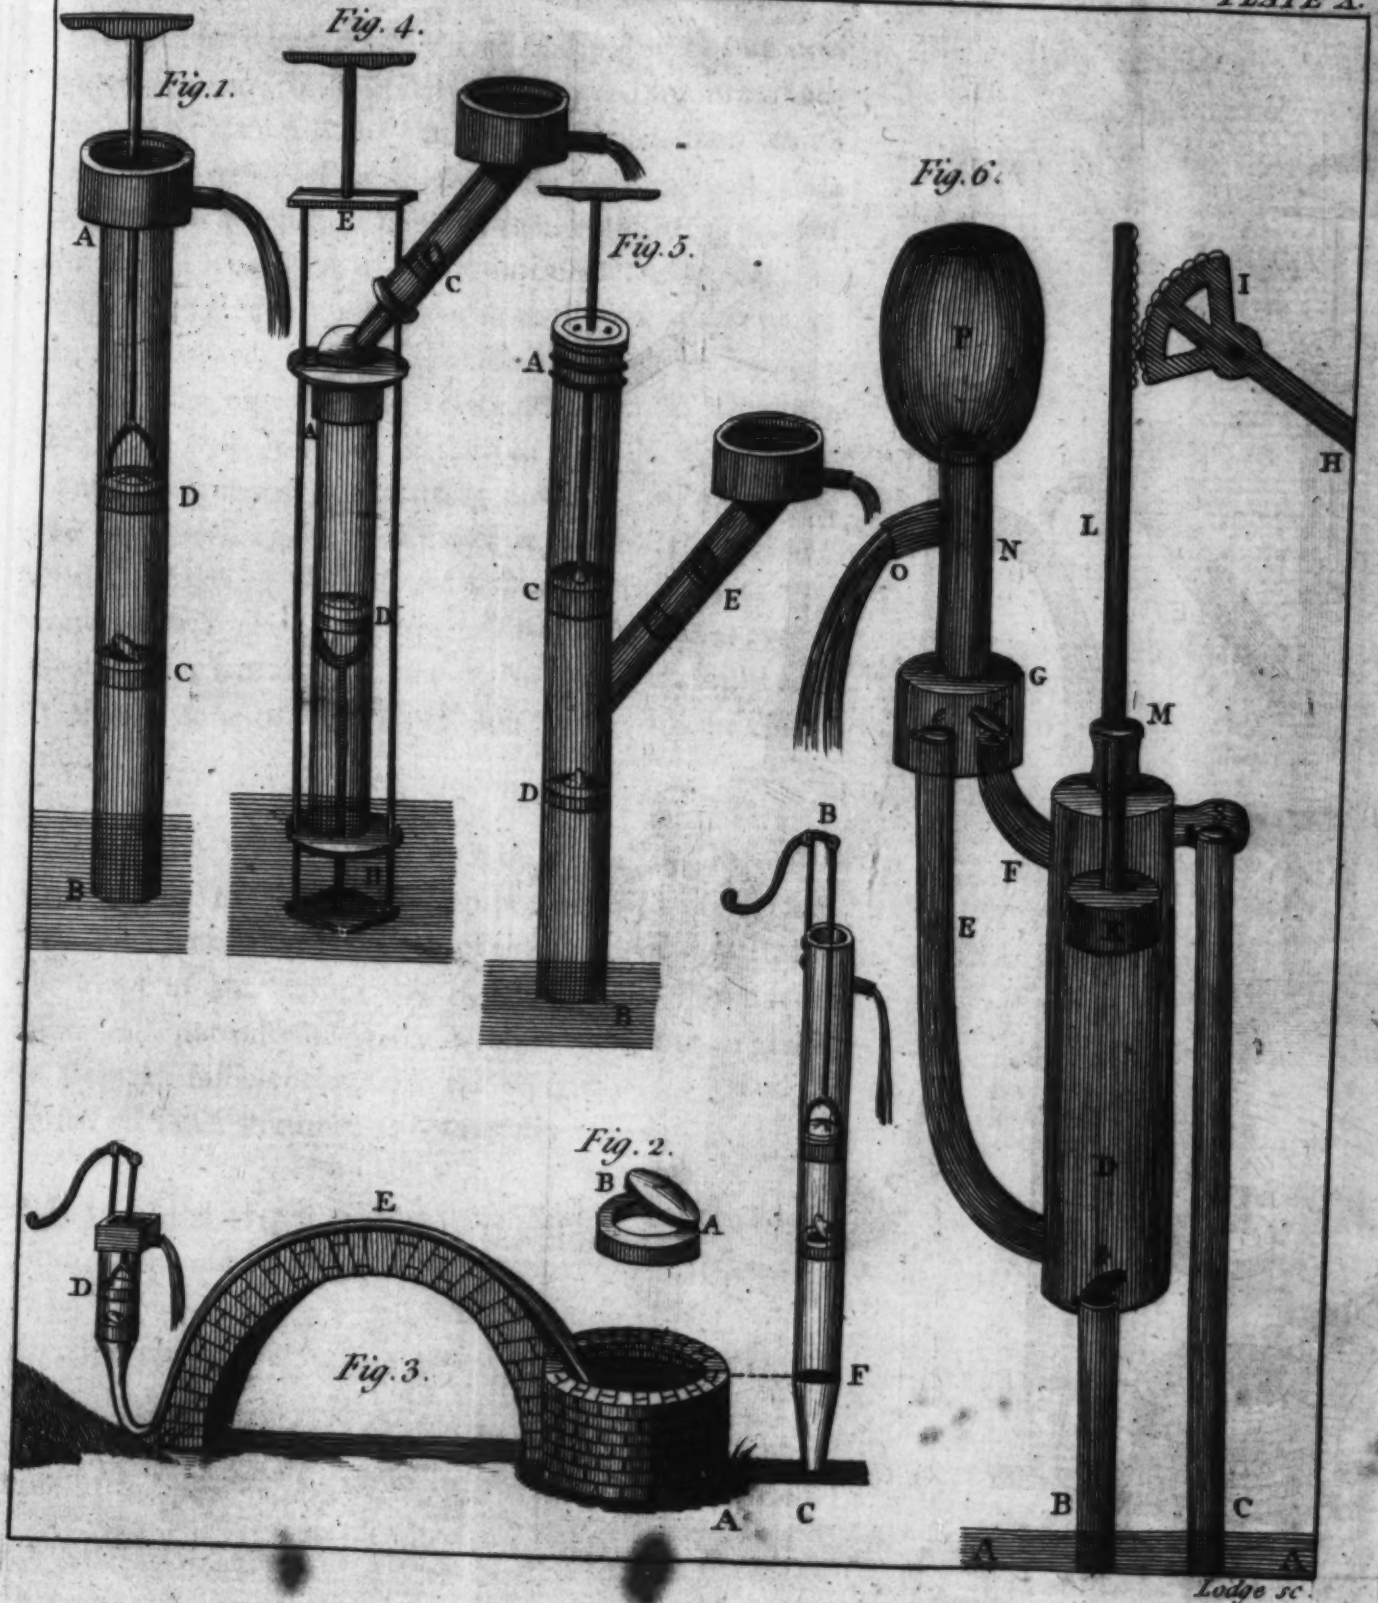
Fig. 1.
A
D
C
B
Fig. 4.
E
C
A
D
B
Fig. 5.
A
C
E
D
B
Fig. 6.
P
I
H
L
O
N
G
M
B
F
E
D
B
C
A
A
Fig. 2.
B
A
Fig. 3.
E
D
F
A
C
Lodge sc.

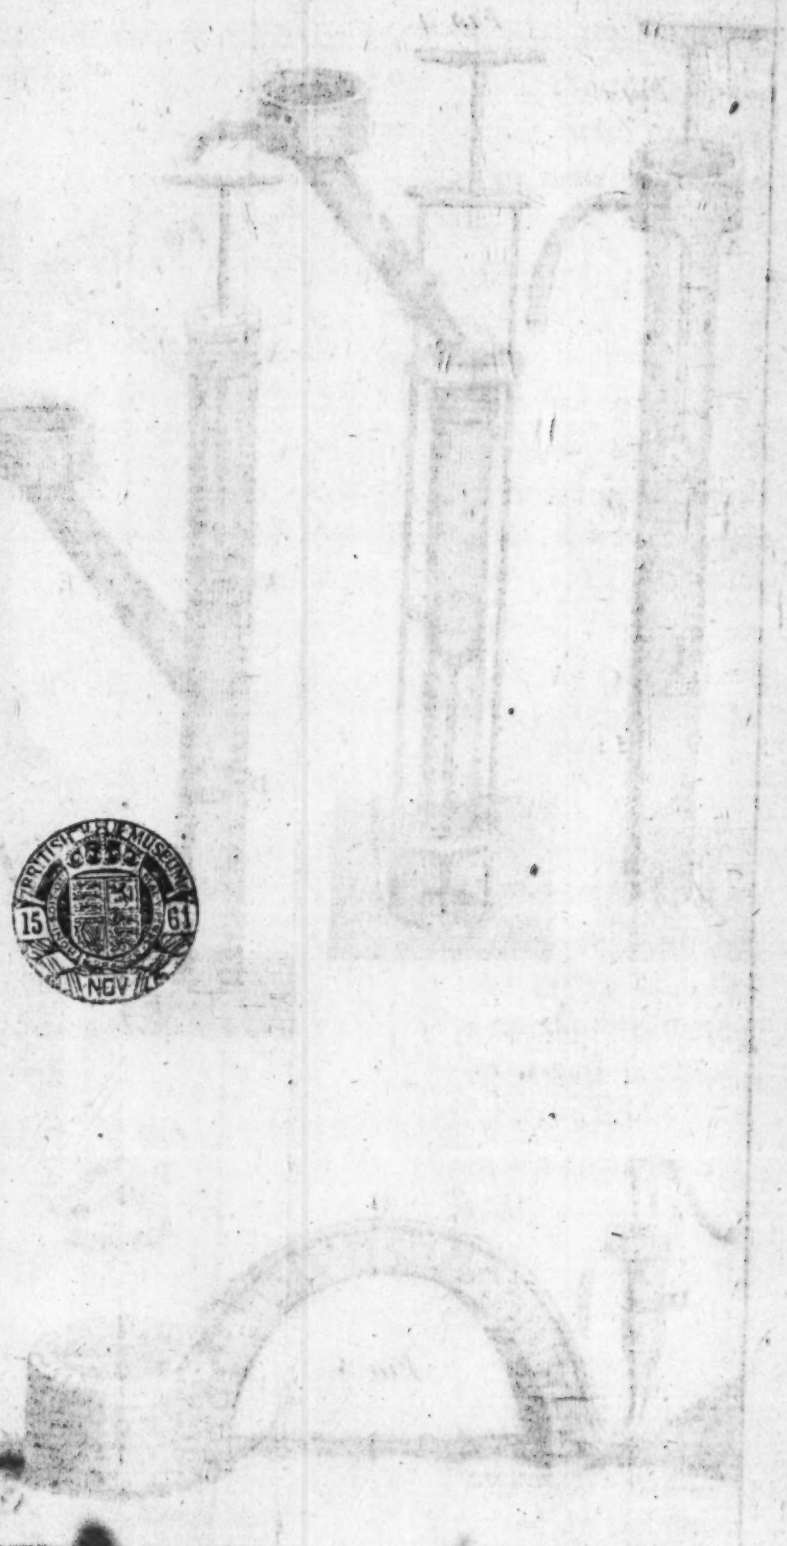
BRITISH MUSEUM
15 61
NOV

If the lower end of this pipe and piſton be put into water, and the piſton, by lifting away the column of upper air, a vacuum will be made in the pipe, upon which the atmoſphere preſſing upon the well-water, will force it to follow the piſton even to the height of 33 feet, if the ſtroke could be of that continued length; and if there be a valve or clack, ſomething like a trap-door, to ſhut downward, as Fig. 2, placed in ſome convenient Fig. 2. part of the pipe, below the water ſo raiſed, as at C, Fig. 1, it will be retained therein; but if this contri- Fig. 1. vance is wanting, upon letting down the piſton again, the water will recede along with it towards the ſpring; ſo that by the motion of the piſton up and down, the water indeed might riſe and ſink in the barrel at every ſtroke; but without an under valve to confine and keep it there, none can be drawn for ſervice in the common way.

The frame A of theſe valves is uſually made of wood, Fig. 2. exactly fitted to the bore of the pipe, and not over thick, that it may not ſtop too much of the water-way; to this the hinge of the leather flap B, which is uſually lined with lead, not only to make it fall readily, but to give it ſtrength ſufficient to bear the weight of the water raiſed without warping, is commonly nailed.

In this kind of pump there is beſides this fixed valve, Fig. 1. a moveable one for conveniency, placed in the piſton as at D, alſo opening upwards, or the way the water is to riſe. Such a piſton is commonly called the bucket.

When the bucket of this machine deſcends, if the bore of the pipe be already full of water, the reſiſtance

thereof will puſh open the moving valve, and part of the water will get above, and when the piſton is drawn upwards, this valve will cloſe under the incumbent weight, and the water will be raiſed by the force applied; ſo that whenever the moveable valve, by being raiſed, is made to lift the weight of the column, as well of air as of water lying thereon, the fixed valve is diſcharged of all preſſure; and then a quantity of water, preciſely equal to that lifted and drawn off by the bucket, will by the ordinary preſſure of the atmoſphere (as was ſaid) on the water in the well, be forced or rather weighed up through it to repleniſh the pipe or barrel. This alternate action of the two valves is viſible through the glaſs pumps, and is worthy of remark.

But if the bore of this machine be full of air only, before water can be drawn, that air muſt be exhauſted, which may be done if the piſton-valve be tight, by the ordinary motion thereof; but for the greater certainty and expedition, water is commonly poured thereon down the pipe, vulgarly called fetching the water; which is of no other uſe than to wet the valves, and to ſupple the collar of leathers fixed to the piſton, and ſpread it that it may lie cloſe to the ſides of the barrel, and ſuffer neither the upper air nor water to eſcape by it, when it is moved up and down.

The firſt ſtroke of the pump, if ſufficiently long, will make a vacuum in the pipe; if otherwiſe, an approach is only made towards it, and but a part of the contained air lifted away; upon which the air remaining in the cavity of the bore, from its natural ſpring, will be conſiderably dilated: to reſtore the natural denſity whereof, the atmoſphere then preſſing harder on the well water than the dilated air does on that in the pipe, will cauſe

the

the water to riſe therein ſo far, as that, together with the included air (yet a little rarefied by the depending weight of water) it ſhall juſt counterpoiſe the weight of the outward air. The very ſame thing will happen again on a repetition of the ſtroke, till by degrees the water ſhall have reached the moving valve, and then the proceſs will go on ſteadily as before deſcribed. And water, by means of this contrivance, may be raiſed to any height whatever, if the power applied be ſufficient to lift the weight, and the pipes ſtrong enough to bear the fluid's natural preſſure.

The preſſure on the pipes in pump-work is in proportion to the ſtanding height of the fluid above the part conſidered: but the weight incumbent on the bucket (or moving valve) of a pump in action, is nearly proportionable to that of a column of water raiſed: for tho' the puſh of the atmoſphere on the ſurface of the ſpring, when the bucket riſes, be really equal to the weight of 33 feet of water; yet is this reſiſtance counterbalanced exactly by the weight of the atmoſphere, ever incumbent on the ſurface of the water thereby raiſed: ſo that all the advantage to be obtained by, or expected from hydraulic machines, or engines to raiſe water, as well indeed as from all other pieces of mechaniſm whatever, is only the putting matters into a convenient method of being executed, and the performance depends on the moving power entirely, under the diſadvantage of friction always againſt it.

Of the Diſpoſition of Pump-Work.

A Pump intended to raiſe water to any height whatever, will always work as eaſy, and require no greater

power to give motion to the bucket, if both the valves be placed towards the bottom of the pipe, than if they were fixed 33 feet above the ſurface of the water.

The playing of the piſton thus low in the pipe, will beſides prevent an inconvenience which might happen, were it placed above, viz. in caſe of a leak beneath the bucket, which, in a great length of pipe, may very eaſily happen, the outward air getting through, would hinder the neceſſary rarefaction of the air in the barrel, on moving the piſton; and conſequently the pump might fail in its operation. This can only effectually be prevented by placing the pump-work in or near the water. In which caſe, ſhould any leak happen upward, it will only occaſion the loſs of ſome of the water, without any other inconvenience. And the leather valves being thus kept under water, will always be found ſupple, pliant, and in a fit condition to perform their office.

It may indeed be here objected, that the ſpecific weight of the iron rod, to which the bucket is fixed, will be an incumbrance to the working of the pump; but if it be made of oak, when well ſoaked, it will be nearly of the ſame ſpecific weight with water, and ſo no burden on the moving power when the ſtroke is fetched.

Placing the pump-work (that is, the valve and piſton) pretty low and near together, will alſo prevent the inconvenience of our not being able in all caſes to fetch up water from the ſpring, by the ordinary pump, when of an equal bore, by reaſon of the ſhortneſs of the ſtroke; which therefore cannot rarefy the air ſufficiently to bring

bring the water up to the piſton from the lower valve. For inſtance: take a ſmooth barrelled pump, 21 feet long, having its piſton fetching ſuppoſe a foot ſtroke, placed above, and the clack or fixed valve at the other end below. By the playing of the piſton, admit it poſſible for water to riſe 11 feet; or if you will, let water be poured on the clack, to the height of 11 feet, and refit the piſton, there will remain ſtill 9 feet of air between it and the water, which cannot be ſufficiently rarefied by a foot-ſtroke to open the clack, or fetch up more water: for in this caſe the air can only be rarefied in the proportion of 9 to 10; whereas to make a bare equilibrium with the atmoſphere, it ought to be as 9 to 13 and a half: ſince, as 22 or the complement of 11, to 33 feet of water the weight of the whole atmoſphere is to 33 feet or the atmoſphere, ſo is the interval ſpoken of, 9 to 13 and a half; to complete which, the ſtroke ought to be at leaſt 4 feet and a half long.

However, by filling the whole void between the piſton and clack at firſt with water, this laſt objection might be removed.

Of the Diſpoſition of Pipes of Conduit.

IN ſome caſes the pump cannot be placed conveniently perpendicular to the well; for example, being to raiſe water out of the well at A by means of a pump at B, the beſt way will be to carry the barrel as low as the ſpring is, communicating therewith by means of the pipe at C. The bucket then playing in the barrel B C, will have the ſame effect as if the well was made perpendicular Fig. 3.

pendicular to the pump; becauſe the water by its proper weight, will always repleniſh B C, through A, through the level of the well-water at F.

And if it ſhould happen, from ſome conſiderable impediment, that the barrel cannot go down to the well directly, it may be led about any other way for ſake of convenience. And then making the pipe of conveyance E, leſs in diameter than the barrel, it will ſooner be exhauſted of air, by moving the piſton; and the water will follow very briſkly, as by the leaden pump at D.

It will, however, always be more eaſy to draw water with pipes that are large, and of an equal bore throughout, becauſe the water will have a leſs velocity in them, and the friction will be in proportion leſs. Upon this account, the pumps ordinarily made by the plumbers go not ſo eaſy as thoſe bored out of trees; becauſe, by making their pipe that brings up water from the ſpring ſo much leſs than the bucket, they, as it were, wire-draw the water raiſed. If the barrel, for inſtance, be four inches in diameter, and the pipe of conduit one, it will in riſing move ſixteen times as faſt through this as it will in that, to the expence of needleſs labour, as well as the great wear and friction of the machine.

For the like reaſon, it will alſo be a fault to bore a pump conically upward, becauſe the water cannot with freedom get away ſo faſt, as a vacuum may be made in the moving piſton; and the reflection of the water from the ſides, will always be a hindrance to the operation.

In practice, however, it is generally obſerved, that ſuch leaden pumps as work pleaſantly, and are light

on

on the hand, have the water-way in the ſucking pipe nearly equal to one-fourth of the area of the barrel; and accordingly an inch and half pipe will pretty well ſupply a three inch barrel; and a four inch barrel ſhould have a leading-pipe nearly two inches in diameter.

Of the Lifting-Pump.

THE ſtructure of the lifting-pump differs from that of the ſucking-pump in nothing but the diſpoſition. As that has its fixed valve below and the moveable one above, in the barrel A B (Fig. 1.) this is juſt the contrary, as C and D. As the bucket or piſton of that is moved by a rod within the bore of the pipe, this is ſo by means of a ſtrong frame fixed to a rod without at E. As in that it is of advantage, for fear of a leak, to have the pump-work, if poſſible, in or near the ſource of water; this in practice is commonly ſo done, and for that reaſon is very ſeldom ſubject to any failure in its performance. An elbow in this kind of pump, to lead the lifted water clear of the playing of the rod, which of neceſſity muſt move perpendicularly, is unavoidable. The friction occaſioned hereby will however always be leſs the nearer this bend comes to a ſtraight line. Fig. 4.

From the name and ſtructure of this machine, it may be imagined, perhaps, that the air's preſſure is not of equal ſervice to this kind of pump as to the former; but it is quite otherwiſe. For if both valves be not perfectly air-tight, water cannot be well raiſed thereby; but in caſe neither of them is defective, water will be raiſed

raiſed to very good purpoſe, by much the ſame kind of proceſs as that of the ſucking pump, before explained. Nor is there any doubt but that if two machines, a ſucking and a lifting-pump, were made of equal bores, wrought with equal force, and were in every circumſtance alike, they would be found of equal ſervice in raiſing water.

On the Forcing-Pump.

Fig 5. THIS pump conſiſts of a barrel A B, a piſton or forcer C, leathered upwards, that it may withſtand the preſſure of the atmoſphere from above, that ſo by ſucking, when raiſed, it may bring up the water to ſupply the barrel; and 'tis alſo leathered downwards, that when repreſſed, it may reſiſt the weight of the water to be forced up, or raiſed for uſe. There are always two fixed valves in this kind of pump; one in ſome convenient part of the ſucking-pipe, as at D, the other in the branching or forcing pipe, as E. Theſe ought in like manner to be air-tight, and ſo diſpoſed as to let the water freely riſe, but are abſolutely to hinder its return.

When the forcer is firſt moved upwards in the barrel, the air between that and the water below, having room to dilate, by its natural ſpring, will of courſe be rarefied; the preſſure of the atmoſphere being intercepted by the force of the barrel A B, on one hand, and by the upper valve at E in the branching-pipe on the other, the water will riſe from the ſpring into A B, for the reaſon already given; and repeated ſtrokes of the piſton will fetch up the fluid to the forcer, and fill the cavity of the pipes

pipes between the fixed valves D and E. This done, the water in this manner ſucceſſively raiſed, being hindered from going down again by the lower valve, will be preſſed by the forcer every time it deſcends, and be thereby obliged to make its way where the leaſt reſiſtance is, viz. through the upper valve at E. And whenever, on the riſing of the forcer, this preſſure intermits, the valve at E will immediately cloſe under the weight of the upper water, and prevent its return that way, while the piſton is riſing with a freſh ſupply: and this is repeated at every ſtroke of the forcer.

Deſcription of a Pump invented by M. de la Hire, which raiſes Water equally quick by the Deſcent as by the Aſcent of the Piſton in the Pump-barrel.

A A is a well, in which the lower ends of the pipes B and C are placed. D is the pump-barrel, into the lowermoſt end of which the top of the open pipe B is ſoldered, and in the uppermoſt end the hollow pipe S is ſoldered, which opens into the barrel; and the top of the pipe C is ſoldered into that piece. Each of theſe pipes has a valve on its top, and ſo have the crooked pipes E and F, whoſe lower ends are open into the pump-barrel, and their upper ends into the box G. Fig. 6.

H is the pump-handle, its center of motion is at I; and as it is moved up and down, it moves the ſolid plunger K, up and down in the barrel, by the ſtraight rod or ſpear L, which moves air-tight in a long collar of leather in the neck M; and the plunger never goes

higher than K, nor lower than D; ſo that from K to D is the length of the ſtroke.

As the plunger riſes from D to K, the atmoſphere (preſſing on the ſurface of the water A A in the well) forces the water up the pipe B, through the valve b, and fills the pump-barrel with water up to the plunger; and during this time, the valves e and S lie cloſe and air-tight on the tops of the pipes E and C.

When the plunger is up to its greateſt height at K, it ſtops there for an inſtant, and in that inſtant the valve b falls, and ſtops the pipe B at top. Then, as the plunger goes down, it cannot force the water between K and D back through the cloſe valve b, but forces all that water up through the crooked pipe E through the valve e, which then opens upward by the force of the water; and this water, after having filled the box G, riſes into the pipe N, and runs off by the ſpout at O.

During the deſcent of the plunger K, the valve f falls down, and covers the top of the crooked pipe F; and the preſſure of the atmoſphere on the well A A forces the water up the pipe C, through the valve S, which then opens upward by the force of the aſcending water; and this water runs from S into the pump-barrel, and fills all the ſpace in it above the plunger.

When the plunger is down to its loweſt deſcent at D, and ſtops there for an inſtant, in that inſtant the valve S falls down, and ſhuts the top of the pipe C; and then, as the plunger is raiſed, it cannot force the water above it back through the valve S, but drives all that water up to the

the crooked pipe F, through the valve f, which opens upward by the force of the aſcending water; which water, after filling the box G, is forced up from thence into the pipe N, and runs off by the ſpout at O.

And thus as the plunger deſcends, it forces the water below it up the pipe E; and as it aſcends, it forces the water above it up the pipe F, the preſſure of the atmoſphere filling the pump barrel below the plunger through the pipe B while the plunger aſcends, and filling the barrel with water above the plunger, through the pipe C, as the plunger goes down.

And thus there is as much water forced up the pipe N, to the ſpout O, by the deſcent of the plunger, as by its aſcent; and, in each caſe, as much water diſcharged at O as fills that part of the pump-barrel as the plunger moves up and down in.

On the top of the pipe O is a cloſe air veſſel P. When the water is forced up above the ſpout O, it compreſſes the air in the veſſel P; and this air, by the force of its ſpring acting on the water, cauſes the water to run off by the ſpout O in a conſtant and (very nearly) equal ſtream.

Whatever the height of the ſpout O be above the ſurface of the well, the top S of the pipe C muſt not be 32 feet above that ſurface; becauſe if that pipe could be entirely exhauſted of air, the preſſure of the atmoſphere in the well would not force the water up the pipe to a greater height than 32 feet: And if S be within 24 feet of the ſurface of the well, the pump will be ſo much the better.


As the collar of leathers within the neck M is apt to dry and ſhrink when the pump is not uſed, and conſequently to let air get into the pump-barrel, which would ſtop the operation of the atmoſphere in the pipe C; I think collars of old hats might be uſed inſtead of leathers, as they would not be liable to that inconvenience.


It matters little what the ſize of the pipe N be, thro' which the water is forced up to the ſpout: but a great deal depends on the ſize of the pump-barrel; and according to the height of the ſpout O above the ſurface of the well, the diameter of the bore of the barrel ſhould be as follows:

For 10 feet high the bore ſhould be 6.9 inches; for 15 feet 5. 6; for 20 feet 4. 9; for 25 feet 4. 4; for 30 feet 4. 0: for 35 feet 3. 7; for 40 feet 3. 5; for 45 feet 3. 3; for 50 feet 3. 1; for 55 feet 2. 9; for 60 feet 2. 8; for 65 feet 2. 7; for 70 feet 2. 6; for 75 feet 2. 5; for 80 feet 2. 5 will do; for 85 feet 2. 4; for 90 feet 2. 3; for 95 feet 2. 2; and for 100 feet, the diameter of the bore ſhould not exceed 2. 1 or 2. 2 inches at moſt. If theſe proportions are attended to, a man of common ſtrength may raiſe water 100 feet high by one pump, as eaſily as he could raiſe it 10 feet high by another.

In this pump the pipes B and C ſeem to be rather too ſmall; which will cauſe the water riſing in them to have a great deal of friction from the quickneſs of its motion: and whoever makes ſuch a pump, will find it very difficult to make leathers in the neck M water-tight, ſo as that no water ſhall be forced out that way when the piſton is drawn up.

Another

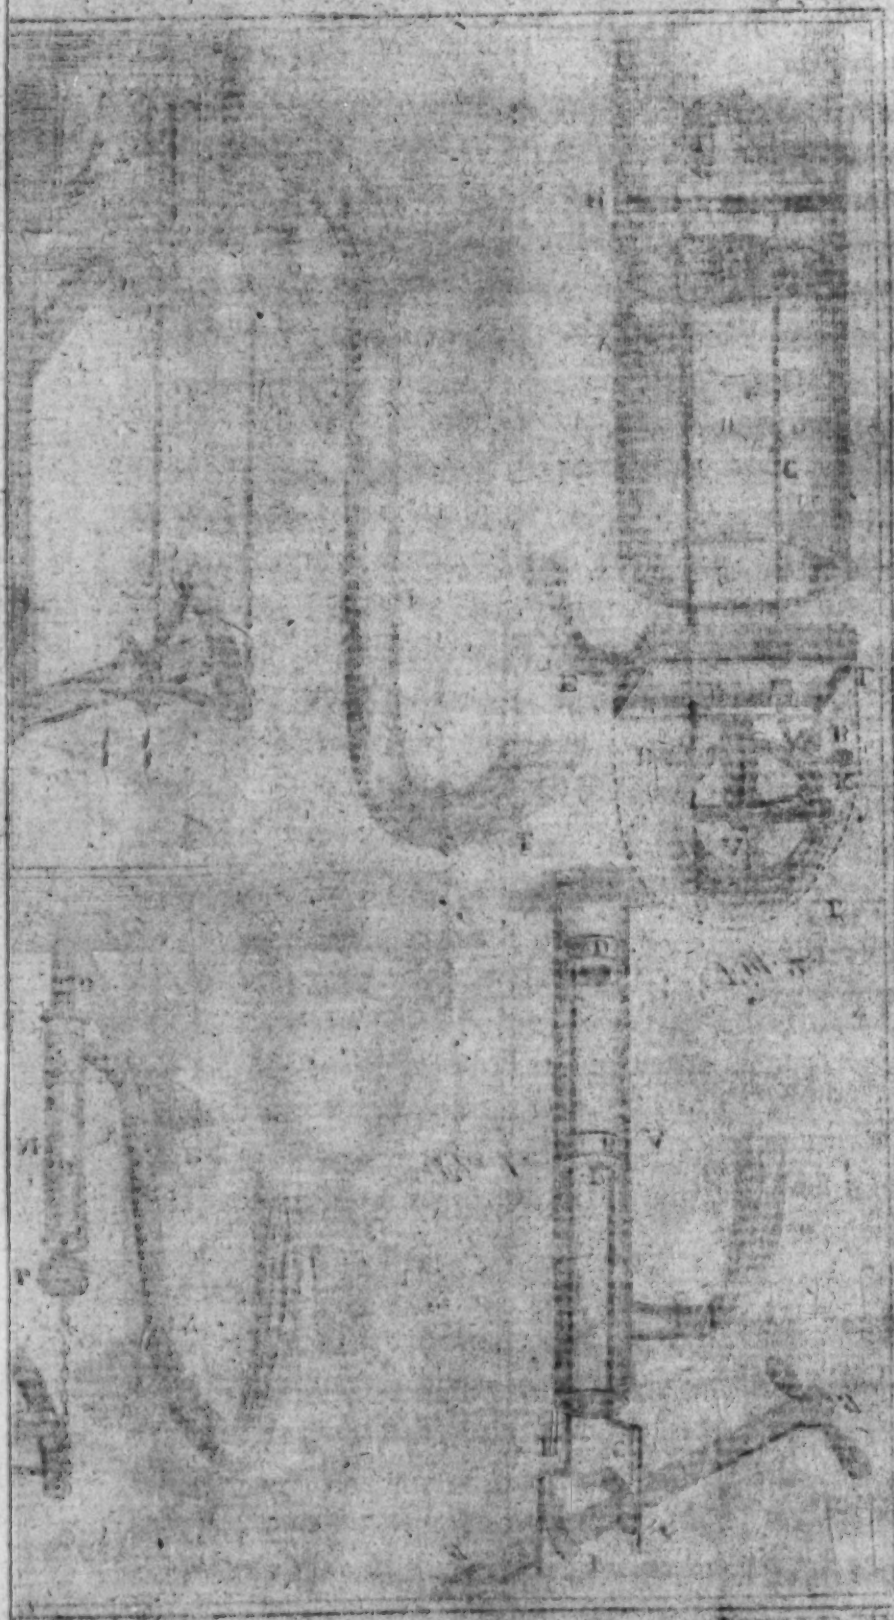

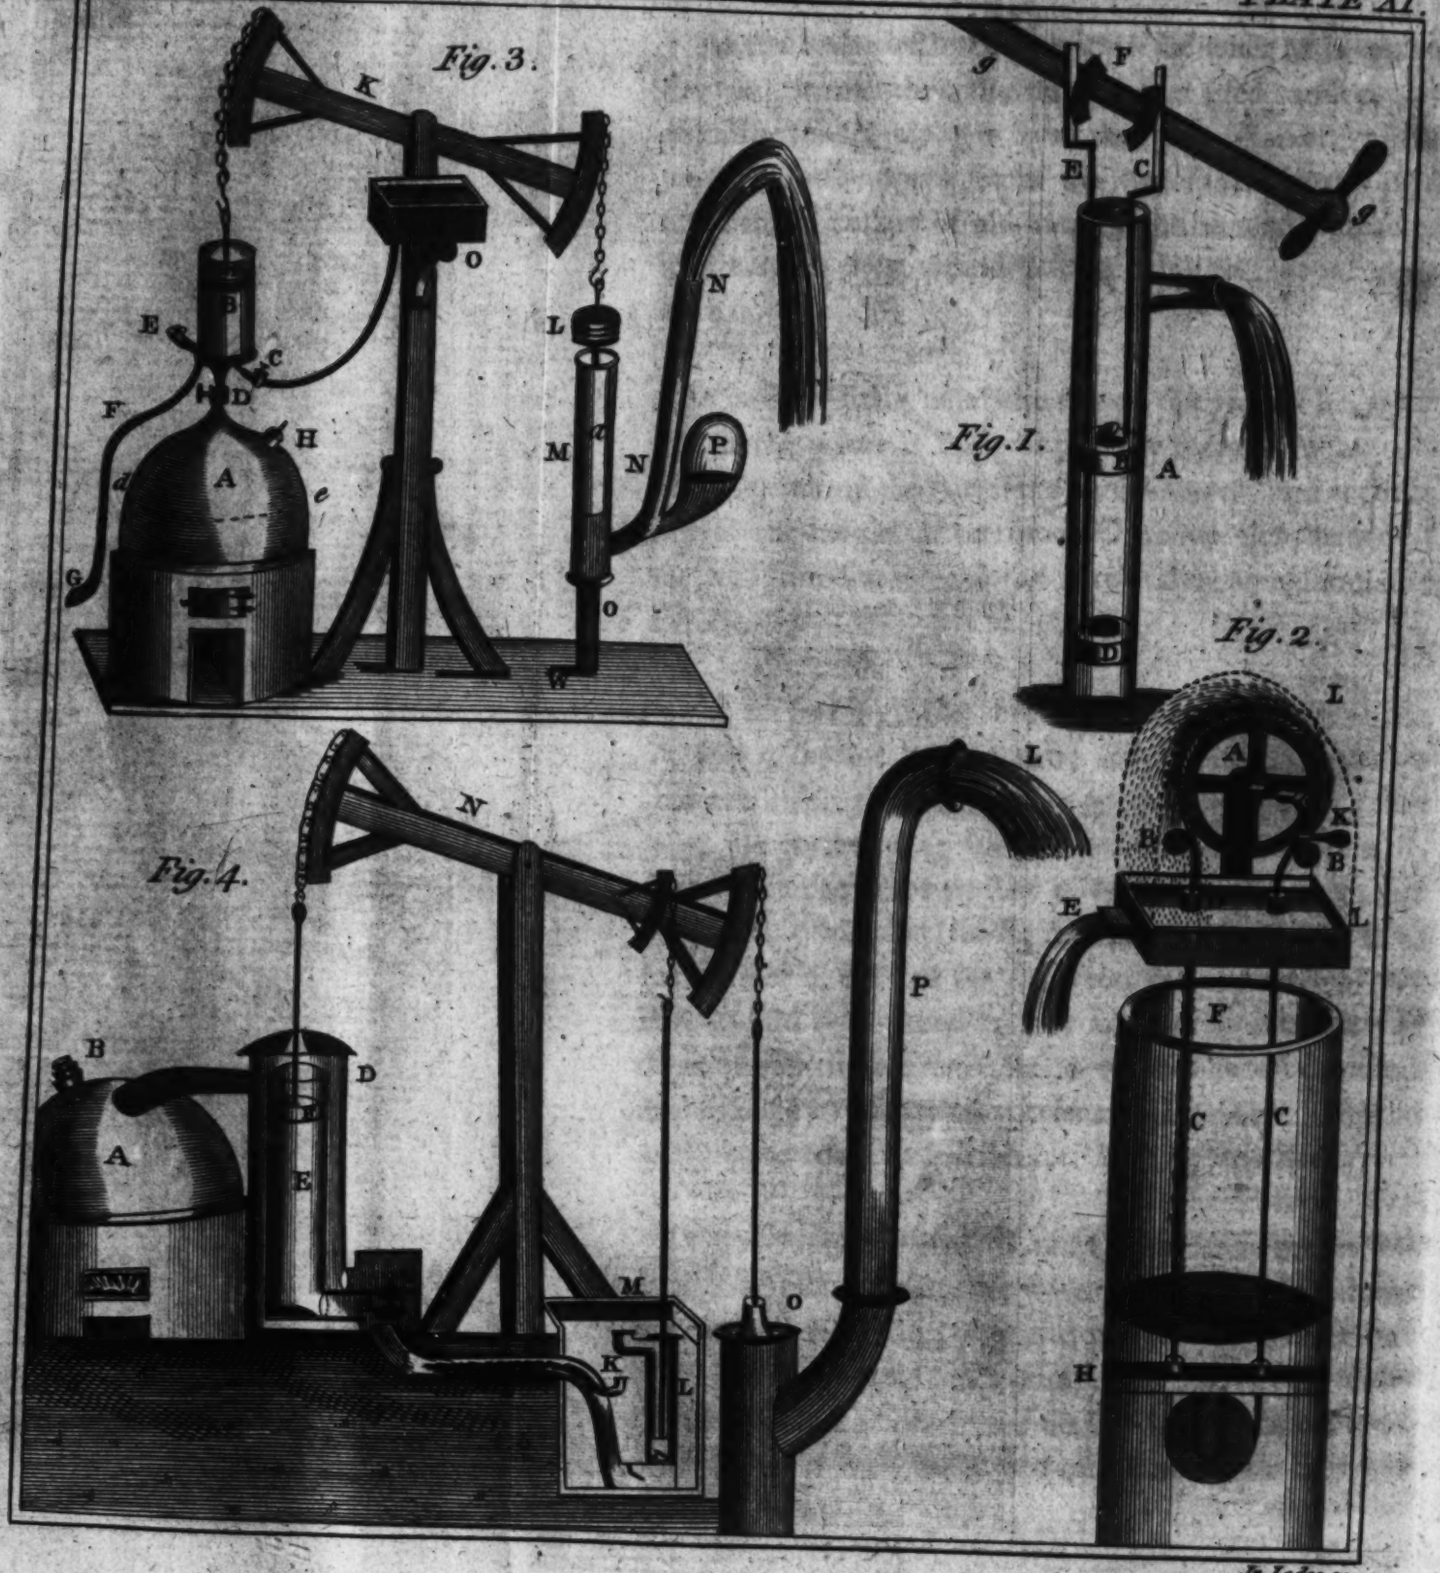
Fig. 3.
K
O
N
L
E
C
F
H
D
A
d
e
G
M
N
P
Fig. 1.
g
F
E
C
A
Fig. 2.
L
A
K
B
E
F
C
H
Fig. 4.
N
B
D
A
E
M
O
K
L
P
In. Lodge sc.

Another Pump, on a more ſimple Conſtruction, invented by Mr. Noble.

THIS pump deſerves notice, as it keeps a continual ſtream; being compoſed only of one ſtraight pipe, or tube, and two piſtons, having each a bucket and a valve. It raiſes as much water with the ſame power, and in the ſame time, as two barrels with four valves will do; and being ſimple in its principles, may be conſtructed reaſonable, compared with M. de la Hire's pump. Plate XI. Fig. 1.

A is a ſtraight tube, or barrel, in which two buckets work: the bucket B is worked by the rod C; and the bucket D is worked by the rod E; which rod goes thro' a hole in the bucket B, and is moved up and down by two circular pieces of wood F, fixed to two handles g g, which cauſes one bucket to aſcend with its load, and ſo *vice verſa*.

An Engine for raiſing Water by a continual Stream, by means of a Hair Rope. Invented by Sieur Vera.

A is a wheel 4 feet over, having an axis and a winch: B B, two pullies 14 inches diameter, in order to keep the ropes to a proper diſtance in the well, and be in contact with a greater ſurface of the wheel: C C, a hair-rope, near one inch diameter: D, a reſervoir to collect the water: E, a ſpout to convey the water from the reſervoir: F, the top of the well: G, the ſurface of the water in the well: H, a frame in which the lower pulley I Fig. 2.

is

is fixed: I, a pulley under which the rope runs, in order to keep it tight: K, the handle to turn the wheel: L L L, a box made of thin boards, in order to collect the water into the reſervoir D.

When the handle K is turned about with a conſiderable velocity, the water which adheres to the rope C C (in wells not very deep) is very conſiderable; the rope thus paſſes through the tube D, which, being 5 or 6 inches higher than the bottom of the reſervoir, hinders the water from returning back into the well, and is conveyed in a continual ſtream through the ſpout E. I have ſeen ſome of the above engines improved by Mr. *Stamford*, which have raiſed a greater quantity of water than any perſon unſkilled in hydraulics, could ſuppoſe in the ſame time, from ſuch a ſimple contrivance.

An Engine to raiſe Water by Fire.

The Marquis of Worceſter, in his *Century of Inventions* (printed A. D. 1663) was the firſt who propoſed raiſing great quantities of water by the force of fire, turning water into ſteam; and he mentions ſome engine of this kind which he ſaw, which played a continual ſtream, in the manner of a fountain, 40 feet high. He alſo ſays, a perſon attending it turned two cocks; that one veſſel of water being conſumed, another begins to force and refill with cold water; and this alternately and ſucceſſively, the fire being attended and kept as equal as poſſible.

Captain Savery having read this account, attempted to raiſe water by fire; and was the firſt who erected an engine for this purpoſe, of the form we have ſince had them.

them. To ſecure the invention to himſelf, he bought up all the marquis's books that he could find, and burnt them; and then gave it out that he diſcovered the method by accident. He made many experiments to bring the machine to perfection, and erected ſeveral for gentlemens ſeats; but could not ſucceed for mines, the depth from which water was to be raiſed from thence, being ſo great, that it required the ſteam too dangerouſly ſtrong to be attempted in his way.

Thus the progreſs of the engine was ſtopped till, long afterwards, Mr. Newcomen, an ironmonger, and Mr. John Cawley, a glazier, contrived another way to raiſe water by fire, where the ſteam to raiſe the water from the greateſt depths of mines is not required greater than the preſſure of the atmoſphere; and this is the preſent ſtructure of the common engine, and which is now of about 80 years ſtanding.

References to the Common Fire Engine.

A the boiler.

B the cylinder.

C the injection cock.

D the ſteam cock, or regulator.

E the ſhifting clack.

F the eduction pipe, or ſinking pipe.

G the

G the eduction valve.

H the ſafety valve.

I the piſton.

K the lever beam.

L weights to counterpoiſe the piſton, and to preſs the forcer down in the pump-barrel M, to drive the water through the pipe or ſpout N.

O a ciſtern to hold the injection water.

P an air veſſel to hinder the pipe N from burſting, and keep a regular ſtream.

Fig. 3. A is a copper veſſel, partly filled with water to d e, which being ſet over a fire and made to boil, will fill the upper part A D with a vaſtly elaſtic vapour, the ſufficient ſtrength whereof is known by its forcing open a valve at H. This heated elaſtic ſteam is, by turning a cock at D, let into the barrel B, where, by its elaſtic force, it raiſes the piſton I, which drives the air above it through a proper clack at the top. After this, that the piſton may by its weight deſcend, a little cold water from the ciſtern O, is let in at the bottom, by turning a cock at C, which, in form of a jet, condenſes the hot ſteam in the barrel into 13,000 times leſs ſpace than it took up before; which makes a ſufficient *vacuum* for the piſton to deſcend in. The piſton I and lever K, being thus put into motion, do accordingly raiſe and depreſs the piſton a, in the barrel M of the forcing pump, on the other ſide; which, by the pipe O, draws the water from the depth W, and forces it to riſe and ſpout thro' the

the tube N, continued to any height at pleaſure. This engine is uſed to draw the water from coal-pits and other mines. There are various other engines, of a more complex ſtructure; but as they act upon the ſame common principle, it is needleſs to ſay any thing more of them here.

The only improvement that has been made in the fire-engine, for thirty years paſt, the public will very juſtly attribute to the ſagacity of Mr. Watt, whoſe ſkill in pneumatics, mechanics, and hydraulics, is evinced by the powerful application of elaſtic vapour, and by making a more perfect vacuum, nearly like that of the barometer, in his new-conſtructed fire-engine.

But before I can explain Mr. Watt's engines, it is neceſſary to premiſe a ſhort account of the imperfections of the common ſteam-engines, and their cauſes.

The ſteam or vapour which ariſes from water confined in a cloſe veſſel, and heated a few degrees above the point at which it boils in the open air, becomes an elaſtic fluid, uniform and tranſparent, about half the gravity of atmoſpheric air, very much greater in bulk than the water of which it is compoſed, and capable of being again reduced to water when brought into contact with matter of a leſs degree of heat than itſelf.

The preſſure of the atmoſphere, or any equivalent reſiſtance, prevents the production of ſteam, until the water be heated to 212 degrees of Fahrenheit's thermometer; but when that preſſure is removed, or the water placed in a veſſel exhauſted of air, ſteam is produced

from it when it is colder than the human blood. On the contrary, if water be preſſed upon by air or ſteam, which are more compreſſed than the atmoſphere, a degree of heat above 212 degrees, is neceſſary for the production of ſteam; and the difference of heats at which water boils under different preſſures, increaſes in a leſs proportion than the preſſures themſelves; ſo that a double preſſure requires leſs than a double increaſe of ſenſible heat.

The experiments which have been publiſhed concerning the bulk of water when converted into ſteam, are erroneous; and the concluſions drawn from them make that bulk greater than it really is. It has been known for ſome time, that water would boil in an exhauſted receiver at a low degree of heat.

If we conſider the common ſteam-engine, we ſhall find it defective; firſt, becauſe the vacuum is produced by throwing cold water into the cylinder to condenſe the ſteam: that water becomes hot, and, being in a veſſel partially exhauſted, produces a ſteam, which in part reſiſts the preſſure of the atmoſphere upon the piſton, and leſſens the power of the engine. The ſecond defect is the deſtruction of ſteam, which unavoidably happens upon attempting to fill a cold cylinder with that fluid; for the injection-water, at the ſame time that it condenſes the ſteam, not only cools the cylinder, but remains there until it be extruded at the eduction-pipe by the ſteam which is let in to fill the cylinder for the next ſtroke; and that ſteam will be condenſed into water as faſt as it enters, until all the matter it comes in contact with be nearly as hot as itſelf.

Every

Every attempt to make the vacuum more perfect by the addition of injection-water, will cool the cylinder more effectually, and cause a greater destruction of steam in the next filling; and if the engine has already a proper load, the destruction of steam will proceed in a greater ratio, than the increase of power by the amendment of the vacuum.

Though it appears that the constructors of steam-engines have never investigated these causes; yet they have been so sensible of the effects, that a judicious engineer does not attempt to load his engine with a column of water heavier than seven pounds for each square inch of the area of the piston.

Mr. Watt's improvement is founded upon these, and some other collateral observations. He preserves an uniform heat in the cylinder of his engines, by suffering no cold water to touch it, and by protecting it from the air or other cold bodies, by a surrounding case filled with the steam or with hot air or water, and by coating it over with substances that transmit heat slowly. He makes his vacuum to approach nearly to that of the barometer, by condensing the steam in a separate vessel, called the condenser;—which may be cooled at pleasure without cooling the cylinder, either by an injection of cold water, or by surrounding the condenser with it; and generally by both. He extracts the injection-water and detached air from the cylinder or condenser, by pumps, which are wrought by the engine itself; or he blows it out by the steam. As the entrance of air into the cylinder would stop the operation of the engines, and as it is hardly to be expected that such enormous pistons as those of steam-engines can move up and down, and yet be abso-

from it when it is colder than the human blood. On the contrary, if water be preſſed upon by air or ſteam, which are more compreſſed than the atmoſphere, a degree of heat above 212 degrees, is neceſſary for the production of ſteam; and the difference of heats at which water boils under different preſſures, increaſes in a leſs proportion than the preſſures themſelves; ſo that a double preſſure requires leſs than a double increaſe of ſenſible heat.

The experiments which have been publiſhed concerning the bulk of water when converted into ſteam, are erroneous; and the concluſions drawn from them make that bulk greater than it really is. It has been known for ſome time, that water would boil in an exhauſted receiver at a low degree of heat.

If we conſider the common ſteam-engine, we ſhall find it defective; firſt, becauſe the vacuum is produced by throwing cold water into the cylinder to condenſe the ſteam: that water becomes hot, and, being in a veſſel partially exhauſted, produces a ſteam, which in part reſiſts the preſſure of the atmoſphere upon the piſton, and leſſens the power of the engine. The ſecond defect is the deſtruction of ſteam, which unavoidably happens upon attempting to fill a cold cylinder with that fluid; for the injection-water, at the ſame time that it condenſes the ſteam, not only cools the cylinder, but remains there until it be extruded at the eduction-pipe by the ſteam which is let in to fill the cylinder for the next ſtroke; and that ſteam will be condenſed into water as faſt as it enters, until all the matter it comes in contact with be nearly as hot as itſelf.

Every

Every attempt to make the vacuum more perfect by the addition of injection-water, will cool the cylinder more effectually, and cauſe a greater deſtruction of ſteam in the next filling; and if the engine has already a proper load, the deſtruction of ſteam will proceed in a greater ratio, than the increaſe of power by the amendment of the vacuum.

Though it appears that the conſtructors of ſteam-engines have never inveſtigated theſe cauſes; yet they have been ſo ſenſible of the effects, that a judicious engineer does not attempt to load his engine with a column of water heavier than ſeven pounds for each ſquare inch of the area of the piſton.

Mr. Watt's improvement is founded upon theſe, and ſome other collateral obſervations. He preſerves an uniform heat in the cylinder of his engines, by ſuffering no cold water to touch it, and by protecting it from the air or other cold bodies, by a ſurrounding caſe filled with the ſteam or with hot air or water, and by coating it over with ſubſtances that tranſmit heat ſlowly. He makes his vacuum to approach nearly to that of the barometer, by condenſing the ſteam in a ſeparate veſſel, called the condenſer;—which may be cooled at pleaſure without cooling the cylinder, either by an injection of cold water, or by ſurrounding the condenſer with it; and generally by both. He extracts the injection-water and detached air from the cylinder or condenſer, by pumps, which are wrought by the engine itſelf; or he blows it out by the ſteam. As the entrance of air into the cylinder would ſtop the operation of the engines, and as it is hardly to be expected that ſuch enormous piſtons as thoſe of ſteam-engines can move up and down, and yet be abſo-

lutely air-tight in the common engines, a ſtream of water is kept always running on the piſton, which prevents the entry of the air; but this mode of ſecuring the piſton, though not hurtful in the common ones, would be highly prejudicial in the new engines. Their piſton is therefore made more accurately; and the outward cylinder having a lid which covers it, the ſteam is produced above the piſton; and when a vacuum is introduced under it, acts upon it by its elaſticity, as the atmoſphere does on common engines by its gravity. This way of working, effectually excludes the air from the inner cylinder, and gives the advantage of adding to the power, by increaſing the elaſticity of the ſteam.

References to the new improved Fire-Engine.

Fig. 4.

A the boiler.

B the ſafety valve.

C the pipe which conveys the ſteam to the outer cylinder.

D the outer cylinder.

E the inner cylinder.

F the piſton.

G the valve that admits the ſteam from the outer cylinder into the inner cylinder, called the ſteam-valve.

H the

H the valve that admits the ſteam from the inner cylinder into the condenſer, called the condenſing valve.

I the condenſer.

K the injection-valve that admits a jet of cold water into the condenſer to condenſe the ſteam.

L the air pump that exhauſts the condenſer both of air and the injection-water that is let in every ſtroke, and is fixed under water in the condenſing back M.

N the lever beam.

O the great water-pump for clearing the mines, or raiſing water for other uſes through the pipe P.

The internal ſtructure of the new engine ſo much reſembles the common ones, that I expect thoſe who know that machine will underſtand this, from the following deſcription:

The cylinder, the great beams, the pumps, &c. ſtand nearly in their uſual poſitions. The cylinder is ſmaller than uſual in proportion to the load, and is very accurately bored. In the moſt complete engines, it is ſurrounded at a ſmall diſtance with another cylinder, furniſhed with a bottom and lid. The interſtice between the cylinders, communicates with the boiler by a large pipe, open at both ends, ſo that it is always filled with ſteam, and thereby maintains the inner cylinder always of the ſame heat with the ſteam, and prevents any condenſation within it which would be more detrimental than an equal condenſation in the outer one.

The

The inner cylinder has a bottom and piſton as uſual; and as it does not reach up quite to the lid of the outer cylinder, the ſteam in the interſtice has always free acceſs to the upper ſide of the piſton. The lid of the outer cylinder has a hole in its middle; and the piſton rod, which is made truly cylindrical, moves up and down through that hole, which is kept tight by a collar of oakum ſcrewed down upon it.

At the bottom of the inner cylinder, there are two regulating valves; one of which admits the ſteam to paſs from the interſtice into the inner cylinder below the piſton, or ſhuts it out at pleaſure; the other opens or ſhuts the end of a pipe, which leads to the condenſer. The condenſer conſiſts of one or more pumps furniſhed with clacks and buckets (nearly the ſame as in common pumps) which are wrought by chains faſtened to the great working beam of the engine. The pipe, which comes from the cylinder, is joined to the bottom of theſe pumps, and the whole condenſer ſtands immerſed in a ciſtern of cold water ſupplied by the engine. The place of this ciſtern is either in the houſe under the floor, between the cylinder and the lever wall; or without the houſe, between that wall and the engine ſhaft, as conveniency may require.

The condenſer being exhauſted of air by blowing, and both the cylinders being filled with ſteam, the regulating valve which admits the ſteam into the inner cylinder is ſhut, and the other regulator which communicates with the condenſer is opened, and the ſteam ruſhes into the vacuum of the condenſer with violence; but there it comes into contact with the cold ſides of the pipe and pumps, and meets a jet of cold water which was opened at

at the ſame time with the exhauſtion-regulator; theſe inſtantly deprive it of its heat, and reduce it to water; and the vacuum remaining perfect, more ſteam continues to ruſh in and be condenſed, until the inner cylinder is exhauſted. Then the ſteam which is above the piſton, ceaſing to be counteracted by that which was below it, acts upon the piſton with its whole elaſticity, and forces it do deſcend to the bottom of the cylinder, and ſo raiſes the buckets of the pumps which are hung to the other end of the beam. The exhauſtion-regulator is now ſhut, and the ſteam-one opened again; which, by letting in the ſteam, allows the piſton to be pulled up by the ſuperior weight of the pump rods: and ſo the engine is ready for another ſtroke.

The working of theſe engines is more regular and ſteady than the common ones; and, from what has been ſaid, their other advantages are apparently very conſiderable; but to ſay exactly how much they excel common engines, is difficult, as common engines differ very much among themſelves. I am told, that the ſavings amount at leaſt to two-thirds of the fuel; which is a very conſiderable object where coals are expenſive.


OPTICS.

OPTICS.

AS the ſenſe of ſeeing is the nobleſt belonging to an animal; without which he would live in perpetual darkneſs, unable to perform the neceſſary exerciſes of life; and ſince all that has been demonſtrated of glaſſes, and will hereafter be demonſtrated of all optical machines, tend only to this ſingle end, to help and improve the ſenſe of ſeeing; and ſince the eye is the organ or inſtrument by which viſion is performed,—it is by nature an optical inſtrument, and the foundation of all others; and therefore it cannot be amiſs to give a ſhort deſcription thereof.

Plate XII. Fig. 1. A B C E is the eye, its figure ſpherical; by reaſon of which, it is eaſily moved any way in its ſocket. The fore-part at A is more convex than the reſt. It is contained in three membranes; the outermoſt is the *Sclerotica*; the ſecond the *Tunica Choroides*; the fore-part is called the *Iris*, which conſiſts of many fibres, like ſo many radii. The third, or innermoſt, is called the *Retina*; which is nothing but the optic nerve, ſpread over the bottom of the eye.

In theſe are contained the three humours of the eye; the firſt is H A I, called the *Aqueous* humour, which is a thin

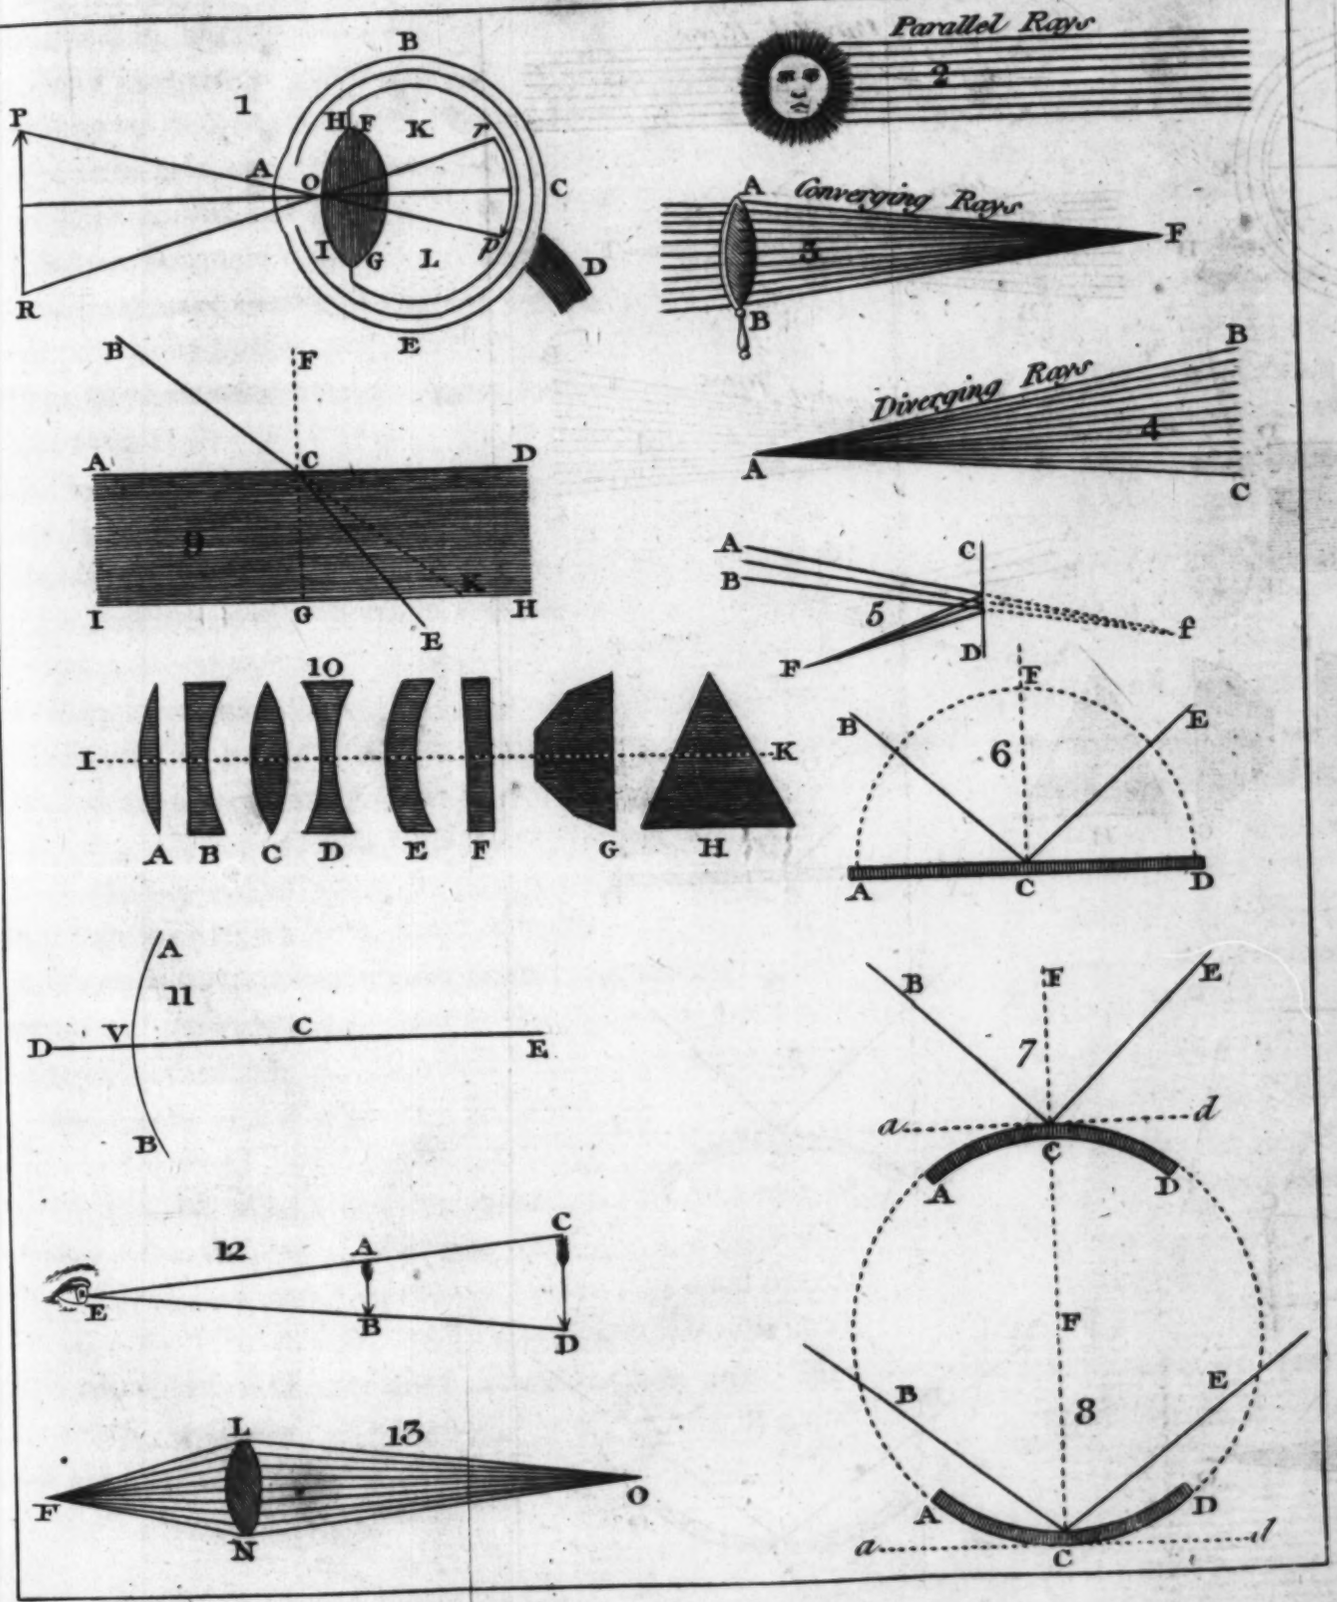
1
P
R
A
O
B
H
F
K
I
G
L
C
D
E
Parallel Rays
2
A
Converging Rays
3
F
B
B
F
A
C
D
9
I
G
K
H
E
B
Diverging Rays
4
A
C
A
B
5
C
D
f
F
10
I
K
A
B
C
D
E
F
G
H
F
B
E
6
A
C
D
A
11
V
C
D
E
B
B
F
E
7
a
d
C
A
D
12
A
C
E
B
D
F
B
E
8
A
D
a
d
C
L
13
F
O
N



Pl
Fi

thin liquor like water. The ſecond is F G the *Chryſtalline*, in form of a lens, more convex behind towards G. Adjoining to this is the third K L, called the *Vitreous* humour.

The chryſtalline is more denſe than the vitreous, and the vitreous more denſe than the aqueous humour, and all together make a compound lens, which refracts the rays of light, iſſuing from an object P R, to the bottom of the eye, and there paints its image p r in the focus upon the retina inverted.

The figure of the aqueous humour is a meniſcus, and ſo is that of the vitreous. The fore part of the ſclerotica is called the *Cornea*, and that part adjoining to it, is called the *White* of the eye. Within the cornea is a coat called the *Uvea*; in the middle of this is a hole O called the *Pupil*, to let in the rays of light. And the pupil is contracted or dilated by ſeveral muſcular fibres in the uvea or iris, according as more or leſs light falls on the eye, and that by an involuntary motion.

D is the optic nerve going from the retina to the common ſenſorium in the brain, where theſe images are perceived. This is not in the middle of the eye, but lies nearer the ſide E, which is towards the noſe.

Round the edge of the chryſtalline F G is a ring of fibres, by the help of which the diſtance A C is made longer or ſhorter, in order to bring the image p r upon the retina, for diſtinct viſion. And perhaps theſe fibres alſo make the chryſtalline more or leſs convex at the ſame time. This

ring of fibres is called the *Ligamentum ciliare*; and its back part is black, to ſtifle the rays that are reflected upon it.

The eye is moved in the head by ſeveral muſcles inſerted in the ſclerotica, ſo that it may be quickly directed to any object.

If the image of an object does not fall upon the retina, at p r, the viſion will be confuſed. If it falls ſhort, or nearer F G; then a concave lens that makes the rays more diverging will bring them to the retina. This is the caſe of purblind or ſhort-ſighted people, who are forced to look very near an object; or elſe they muſt uſe concave ſpectacles.

If the rays do not unite till they get beyond the retina, as in moſt old people; then a common convex lens of a due force, held between the eye and the object, will make them converge, and fall upon the retina. Therefore long-ſighted people muſt uſe convex ſpectacles.

Although the image is painted inverted in the eye, yet we judge it erect; becauſe we always find it ſo by cuſtom and experience.

But that viſion is effected in this manner, may be demonſtrated experimentally. Take a bullock's eye while it is freſh, and having cut off the three coats from the back part, quite to the vitreous humour, put a piece of white paper over that part, and hold the eye towards any bright object, and you will ſee an inverted picture of the object upon the paper.

Seeing

Seeing the image is inverted, many have wondered why the object appears upright. But we are to conſider, 1. That inverted is only a relative term: and 2. That there is a very great difference between the real object and the means or image by which we perceive it. When all the parts of a diſtant proſpect are painted upon the retina, they are all right with reſpect to one another, as well as the parts of the proſpect itſelf; and we can only judge of an object's being inverted, when it is turned reverſe to its natural poſition, with reſpect to other objects which we ſee and compare it with. If we lay hold of an upright ſtick in the dark, we can tell which is the upper or lower part of it, by moving our hand upward or downward; and know very well that we cannot feel the upper end by moving our hand downward. Juſt ſo we find by experience, that upon directing our eyes towards a tall object, we cannot ſee its top by turning our eyes downward, nor its foot by turning our eyes upward; but muſt trace the object the ſame way by the eye to ſee it from head to foot, as we do by the hand to feel it; and as the judgment is informed by the motion of the hand in one caſe, ſo it is alſo by the motion of the eye in the other.

The diameters of images at the bottom of the eye, as p r, are proportioned to the angles which the objects ſubtend at the eye, as P O R; the ſame as in a lens; and are reciprocally as the diſtances of the ſame object viewed in different places.

The eye is in reality no more than a camera obſcura; for the rays of light flowing from all points of an object, through the pupil of the eye, do by the refraction of the humours of the eye, paint the image thereof in the bottom

of the eye; juſt ſo it is in the camera obſcura, where all the rays refracted by a lens in the window-ſhut, or paſſing through a ſmall hole in it, paint the image on the oppoſite wall. Some properties of the eye are theſe:

1ſt. The eye can only ſee a very ſmall part of an object diſtinctly at once. For the collateral parts of an object are not repreſented diſtinctly in the eye; and therefore the eye is forced to turn itſelf ſucceſſively to the ſeveral parts of the object it wants to view, that they may fall near the axis of the eye, where alone diſtinct viſion is performed.

2d. When any point of an object is ſeen diſtinctly with both eyes, the axis of both eyes are directed to that point, and meet there. And then the object appears ſingle, though looked at with both eyes. For the optic nerves are ſo framed, that the correſpondent parts in both eyes lead to the ſame place in the brain, and give but one ſenſation; and the image will be twice as bright with both eyes as with one. But if the axis of both eyes are not directed to the object, that object will appear double, as the pictures in the two eyes do not fall upon correſpondent or ſimilar parts of the retina.

3d. The beſt eye can hardly diſtinguiſh a particle of matter that ſubtends at the eye an angle leſs than half a minute. And very few can diſtinguiſh it when it ſubtends a minute. If the diſtance of two ſtars in the heavens be not greater than this, they will appear as one.

4th. Young people can ſee nearer hand than old people; for as men grow old their eyes grow more flat; and to correct

rect the rays of light at the retina, the object muſt be placed further off. And this is the reaſon that ſhort-ſighted people, as they grow older, ſee at a greater diſtance.

5th. Though men may ſee diſtinctly at different diſtances, by altering the poſition and figure of the chriſtalline, yet they can only ſee diſtinctly within certain limits, and nearer than that, objects appear confuſed. But theſe limits are not the ſame in different people. A good eye can ſee diſtinctly when the rays fall parallel upon it; and then the principal focus is at the bottom of the eye.

6th. If a good eye views an object at the leaſt diſtance it can be ſeen diſtinctly, and then at twice that diſtance, and then at an infinite diſtance; there is about the ſame alteration made in the figure of the eye, between the two laſt caſes, as there is between the two firſt.

7th. If a ſhort-ſighted perſon can ſee an object diſtinctly at two diſtances, whereof one is double the other; as great an alteration muſt be made in the figure of his eyes to ſee it at an infinite diſtance, as there was made for the firſt two diſtances, or as great an alteration as is made in a good eye to ſee diſtinctly from the greater diſtance to infinity. And therefore a ſhort-ſighted perſon can ſee diſtinctly at all diſtances with a ſingle concave glaſs, of a proper figure. And hence the cauſe of ſhort-ſightedneſs is not a want of power to change the figure of the eye; but that power is not great enough to accommodate it to all diſtances, taken from a point ſo near the eye.

8th. A man can judge at a ſmall diſtance with a ſingle eye, by frequently obſerving how much variation is made in

in the eye to make the object diſtinct; and from this a habit of judging is acquired. But this cannot be done at great diſtances, becauſe, though the diſtance be varied, the chance in the eye becomes then inſenſible.

9th. But a man can judge of greater diſtances with both eyes, than he can with one eye. For the eyes being at a diſtance from one another, as long as that diſtance has a ſenſible proportion to the diſtance of the object, one gets a habit of judging, by the poſition of the axis of the eyes, which are always directed to that point. For different diſtances require different poſitions of the axis, which depends on the motions of the eyes which we feel. But in very great diſtances, no judgment can be made from the motion of the eyes, or their internal parts. Therefore we can only gueſs at the diſtances from the magnitude, colour, and the poſition of interjacent bodies.

Whatever light falls upon that part of the retina, where the optic nerve D ſprings, makes no impreſſion; and therefore, if the picture of an object falls thereon, it is not perceived, and that object is inviſible. This will appear by placing a ſmall bright object before you, and looking at it with one eye, and moving one eye laterally towards the contrary ſide (towards the left, if it be the right eye), the object will diſappear, and ſeem to be loſt; and moving it ſtill further, it will appear again. Now this place is not at the bottom of the eye, but nearer the noſe in both of them; ſo that no rays, either parallel or diverging, that come from any object, can fall upon that place in both the eyes; ſo that any object we direct the eyes to, will always be viſible, at leaſt to one eye. But the ſame bright object may be made to diſappear to both eyes, by directing the axis of

both

both eyes to a point a little beyond the nose, to be found by trials.

11th. Dimness of sight generally attends old people, and this may arise from two causes; 1. by the eyes growing flat, and not uniting the rays at the retina, which causes indistinctness of vision; or, 2. by the opacity of the humours of the eye, which in time lose their transparency in some degree; from whence it follows that a great deal of the light is stopt and lost, that enters the eye; and every object appears faint and dim.

12th. As the rays of light flowing from an object, and painting its image upon the retina, are the immediate cause of seeing; so where there is no light, there can be no vision: consequently without light, the eye becomes a machine utterly useless; as it can give us no manner of information of the existence of bodies at a distance from us.

DEFINITIONS.

1. OPTICS is a science which teaches the nature, properties, and laws of *Vision*, arising from the rays of light, either *reflected* from the surfaces of bodies, or *refracted* in passing through them, and painting the images of objects on the *Retina* on the bottom of the eye. Also this science, in its most extensive acceptation, comprehends the whole doctrine of *Light* and *Colours*, and all the *Phænomena* or appearances of visible objects. Optics, therefore, consist of three parts, *viz. Catoprics*, *Dioptrics*, and *Chromatics*.

2. *Catoprics* is that part which treats of *Reflex Viſion*, or all that relates to the viewing of objects by light *reflected* from the ſurfaces of bodies, whether *plain*, *convex*, *concave*, or otherwiſe; and in rays *diverging*, *converging*, or *parallel* to each other.

3. *Dioptrics* treats of the properties of light and viſion, ariſing from rays paſſing through tranſparent *Media* or bodies, as *Air*, *Water*, *Glaſs*, *Chryſtal*, *Diamond*, &c.

4. *Chromatics* treats of the *Colours* of light and natural bodies. Of this part Sir *Iſaac Newton*'s Optics almoſt entirely conſiſt.

5. *Light* is that property of ſome bodies by which objects are rendered *viſible*, or capable of being *ſeen* by the eye. It conſiſts of very ſmall particles, which iſſue from the luminous body in ſtraight lines.

6. *Rays* or *Beams* of light, are thoſe ſtreams or emanations of light, which proceed from the luminous body and enlighten or illuminate all objects ſo that they may be *ſeen*.

7. The *Radient* is that body or object which emits, or from which proceeds the rays of light under conſideration at any time.

8. The *Species* of an object is the image or repreſentation thereof made by the rays of light in the *Focus*, or place where they unite.

9. *Parallel*

9. *Parallel* rays, are ſuch as proceed *equally diſtant* from each other through all their courſe; as thoſe from the *Sun*, and other vaſtly diſtant objects. Fig. 2.

10. *Converging* rays are ſuch as, proceeding from a body, approach nearer and nearer together in their progreſs, tending to one certain point, where they all unite; thus the rays proceeding from the object A B to the point F, are ſaid to *converge* towards that point. Fig. 3.

11. *Diverging* rays are thoſe, which, proceeding from any point, as A, do continually recede from each other as they paſs along in their courſe towards B C. Fig. 4.

12. The *Focus* of *Rays* is that point to which all converging rays tend, and in which they unite and interſect each other; as the point F. And this is called the *Real Focus*; but Fig. 3.

13. The *Virtual* or *imaginary Focus*, is a point, as f, to which the rays A B tend, and where they would unite, were they not intercepted by the obſtacle (ſuppoſe a mirrour) C D; by which means they are turned aſide, and made to converge in their *Real Focus* F. Fig. 5.

14. *Reflection* of rays is their *Regreſs* or *Returning* from the ſurface of ſuch bodies on which they fall, and cannot penetrate or enter. Thus the ray B C falling on the ſurface A D, is reflected or turned back or up again in the direction C E. Fig. 6.

15. The *Plane* of *Reflection* is that in which the reflecting point, or ſurface, is ſituated, as A D and a d. Fig. 7, 8.

Fig. 6. 16. *Mirrours* or *Speculums* are thoſe bodies whoſe ſurfaces are ſo very ſmooth, and fine poliſhed, as to be impervious to the rays of light which fall on them, and which therefore they reflect ſo intirely, as to repreſent the *Images of Objects* oppoſed to them. Theſe are generally made of metal, or glaſs poliſhed on one ſide, and ſilvered on the other, and are either *plain*, *convex*, or *concave*.

17. *Plain Mirrours* are thoſe whoſe ſurfaces are perfect *Planes*, and whoſe ſection is a *ſtraight Line*, as A D. Note, theſe are vulgarly called *Looking-Glaſſes*.

18. *Convex Mirrours* are ſuch whoſe ſurfaces do every way equally and uniformly riſe above the plane of their baſes or loweſt parts; the ſection of which ſorts of mirrour is a *Curve*, either *Circular*, *Elliptical*, *Parabolical*, or *Hyperbolical*. Where A C D is a *Circular* ſection, and the *Mirrour* Fig. 7. is the ſegment of a *Globe*, or *Spherical* ſurface, which are moſt of common uſe. As,

19. *Concave Mirrours* are thoſe whoſe ſurfaces ſink down with an uniform hollowneſs or curvity below the Fig. 8. upper parts A D, and whoſe ſection alſo is a *Curve*, as various as the convex above; but A D is circular, and its ſurface the internal part of an *hollow Sphere*, as being moſt in uſe.

20. The *Incident Ray* is that which comes from any object, and falls on the reflecting ſurface as B C; and C E is the *reflected Ray*. Fig. 6.

21. The *Angle* or *Incidence* is that which is contained between the *incident Ray* B C, and a perpendicular to the

the reflecting ſurface in the point of reflection F C; *viz.* the angle B C F. Fig. 6. 7, 8.

22. The *Angle of Reflection* is that contained between the ſaid perpendicular F C, and the reflected ray C E; *viz.* the angle F C E. Fig. 6. 7, 8.

23. *Refraction* of rays is their being bent or turned out of their firſt courſe, in paſſing out of one *Medium* into another. Let A D H I be a body of *Water*, A D its ſurface, C a point in which a ray of light B C (in the air) begins to enter the ſame: this ray by the greater denſity of the water, will be reſiſted, and inſtead of paſſing ſtraight forwards in its firſt direction to K, it will be bent therefrom, and made to deſcribe the tract C E, which is called the *refracted Ray*. Let F G be drawn perpendicular to the ſurface of the medium in C, then it is plain the ray B C in paſſing out of a *rarer Medium (viz.* of *Air)* into a *denſer Medium, (viz.* of *Water)* is refracted into a ray C E, which is nearer to the perpendicular C G, than the *incident Ray*; and on the contrary, the ray E C paſſing out of a *denſer* into *a rarer Medium*, will be refracted into C B, which is farther from the perpendicular. Fig. 9.

24. The *Angle* B C F is the angle of *Incidence*, as before: and F C E is the angle of *Refraction*, as being contained between the refracted ray C K, and the perpendicular C G.

25. A *Lens* is a medium, generally of *Glaſs*, of a proper form to *collect* or *diſperſe* the rays of light which paſs through it. Of theſe there are various forms, which, from thence, receive divers names. As,

Fig. 10. 26. A *Plano-Convex*, which hath one ſide plain, the other ſpherical or convex; as A.

27. A *Plano-Concave*, *plain* on one ſide, and concave on the other; as B.

28. A *Double-Convex*, is one *Convex* on both ſides; as C.

29. A *Double-Concave*, is one *Concave* on both ſides; as D.

30. A *Meniſcus*, is one *Convex* on one ſide, and *Concave* on the other; as E.

31. A *Plain Glaſs*, which is flat on both ſides, and of equal thickneſs in all its parts; as F.

32. A *Flat Plano-convex*, whoſe convex ſide is ground into ſeveral flat ſurfaces; as G.

33. A *Priſm*, with three flat ſides, and when viewed endways, appears like an aquilateral triangle; as H.

34. Glaſſes ground into any of the ſhapes A B C D E, are called lenſes, and a line going horizontally through the middle, I K, is called the axis of the lens.

Fig, 11. 35. The *Vertex* of a *Mirrour* or *Lens*, as A B, is the middle point V, every way equally diſtant from its baſe.

36. The

36. The *Axis* of a *Mirrour* or *Lens* is the right line E D, drawn through the vertex V, and the center C, on which it was deſcribed.

37. The *Viſual* or *Optic Angle*, is that which is contained under the two right lines drawn from the extreme points of an object to the eye; thus A E B or C E D is the *Optic Angle*, or that under which the object A B or C D appears to the eye at E. Fig. 12.

38. A *Pencil* of rays is a double cone of rays, as L O N F L, joined together at the baſe in the *Lens* L N; of which one cone L O N has its vertex in ſome point of an object, as at O; and the other cone L F N has its vertex in the point of convergence, or *Focus* F. The middle line O F is called the *Axis* of that pencil. Fig. 13.

Of the practical part of Optics, with as much Theory as will be ſufficient for the Conſtruction and Uſe of moſt Kinds of optical Inſtruments.

WHAT I here propoſe to lay down as the practical part of optics, is chiefly intended for thoſe whoſe curioſity and ingenuity may lead them to make farther diſcoveries in this noble ſcience.

The part of optics has always been kept as ſecret as poſſible by people who made it their buſineſs, and the prices of optical inſtruments being partly out of the reach of any, but ſuch as are poſſeſſed of independent fortunes; by this means, ſome thouſands of ingenious enquirers have been deprived from

from viewing the glorious works of nature, which afford ſuch an amazing field for contemplation and amuſement.

It has been attended with great expence, and unwearied diligence, for me to gain the little knowledge I have of this art, and which, I ſhall freely communicate to the public, in as plain a manner as I poſſibly can; in order to do this, I ſhall deſcribe the parts, as far as the conſtruction and uſe require, of every machine I ſhall have occaſion to treat of; at the ſame time I would particularly recommend to every one who wiſh to make ſome proficiency in optics, to a cloſe application to the mathematics, as that is the only means whereby any one can attain a true knowledge of its theory.

My deſire alſo is to make people ſenſible of the pleaſure and information the microſcope and teleſcope can afford, and inſtruct them how to manage as well as to make theſe machines; likewiſe explain the effects of glaſſes on the ſight, and lead them gradually into the nature, uſe, and magnifying powers of theſe inſtruments.

Of Spectacles.

WHEN objects are ſeen through a perfectly flat glaſs, the rays of light paſs through it, from them to the eye, in a ſtraight direction, and parallel to each other; and conſequently, the objects appear very little either diminiſhed, or enlarged, or nearer, or farther off, than to the naked eye. But if the glaſs they are ſeen through has any degree of convexity, the rays of light are directed from the circumference towards the center, in an angle proportionable to the

the convexity of the glaſs, and meet in a point, at a greater or leſſer diſtance from the glaſs, as it is more or leſs convex. This point, where the rays meet, is called the focus; and this focus is nearer or farther off, according to the convexity of the glaſs; for as a little convexity throws it to a conſiderable diſtance, ſo when the convexity is much, the focus is very near. Its magnifying power is alſo in the ſame proportion to the convexity: for as a flat glaſs ſcarce magnifies at all, the leſs a glaſs departs from flatneſs, the leſs of courſe it magnifies; and the more it approaches towards a globular figure the nearer its focus is, and the more its magnifying power.

People's different length of ſight depends on the ſame principle, and ariſes from a more or leſs convexity of the cornea and chryſtalline humour of the eye; the rounder theſe are, the nearer will the focus or point of meeting rays be, and the nearer an object muſt be brought to ſee it well. The caſe of ſhort-ſighted people is only an over-roundneſs of the eye, which makes a very near focus; and that of old people is a ſinking or flattening of the eye, wherby the focus is thrown to a great diſtance: ſo that the former may properly be called eyes of two ſhort, and the latter eyes of too long a focus. Hence too, the remedy for the laſt is a convex glaſs, to ſupply the want of convexity in the eye itſelf, and brings the rays to a ſhorter focus; whereas a concave glaſs is needful for the firſt, to ſcatter the rays, and prevent their coming to a point too ſoon.

Nothing is more common than to obſerve old people holding objects they would examine at a great diſtance from them, for the reaſon above-mentioned; and every body


body knows, ſhort-ſighted people cannot diſtinguiſh any thing without bringing it very near their eyes. Both extremes are very inconvenient; but thoſe whoſe eyes are ſtat by age, ſhould remember with ſatisfaction, that they have enjoyed the pleaſure of them for many years; and the ſhort-ſighted may comfort themſelves, that they can diſtinguiſh much ſmaller objects than long-ſighted people: for the object is magnified in proportion to the roundneſs of the eye, and the nearneſs of the focus, and conſequently appears four times as big to an eye whoſe focus is but four inches off, as it does to one whoſe focal diſtance is at eight inches. Short-ſighted people have alſo this farther advantage, that age improves their eyes, by the ſame means it impairs other people's, that is, by making them more flat.

The nearer any object can be brought to the eye, the larger will be the angle under which it appears, and the more it will be magnified. Now, that diſtance from the naked eye, where the generality of people are ſuppoſed to ſee ſmall objects beſt, is at about ſix inches; conſequently, when ſuch objects are brought nearer than ſix inches, they will become leſs diſtinct: and if to four or three, they will ſcarce be ſeen all. But by the help of convex glaſſes we are enabled to view things clearly at much ſhorter diſtances than theſe: for the nature of a convex lens is to render an object diſtinctly viſible to the eye at the diſtance of its focus; wherefore, the ſmaller a lens is, and the more its convexity, the nearer is its focus, and the more its magnifying power.

Plate XIII. Fig. 1. Now, it is evident, from the figure, if either the cornea, a b c, or chyſtalline humour e, or both of them, be the

OPTICS

PLATE XIII.

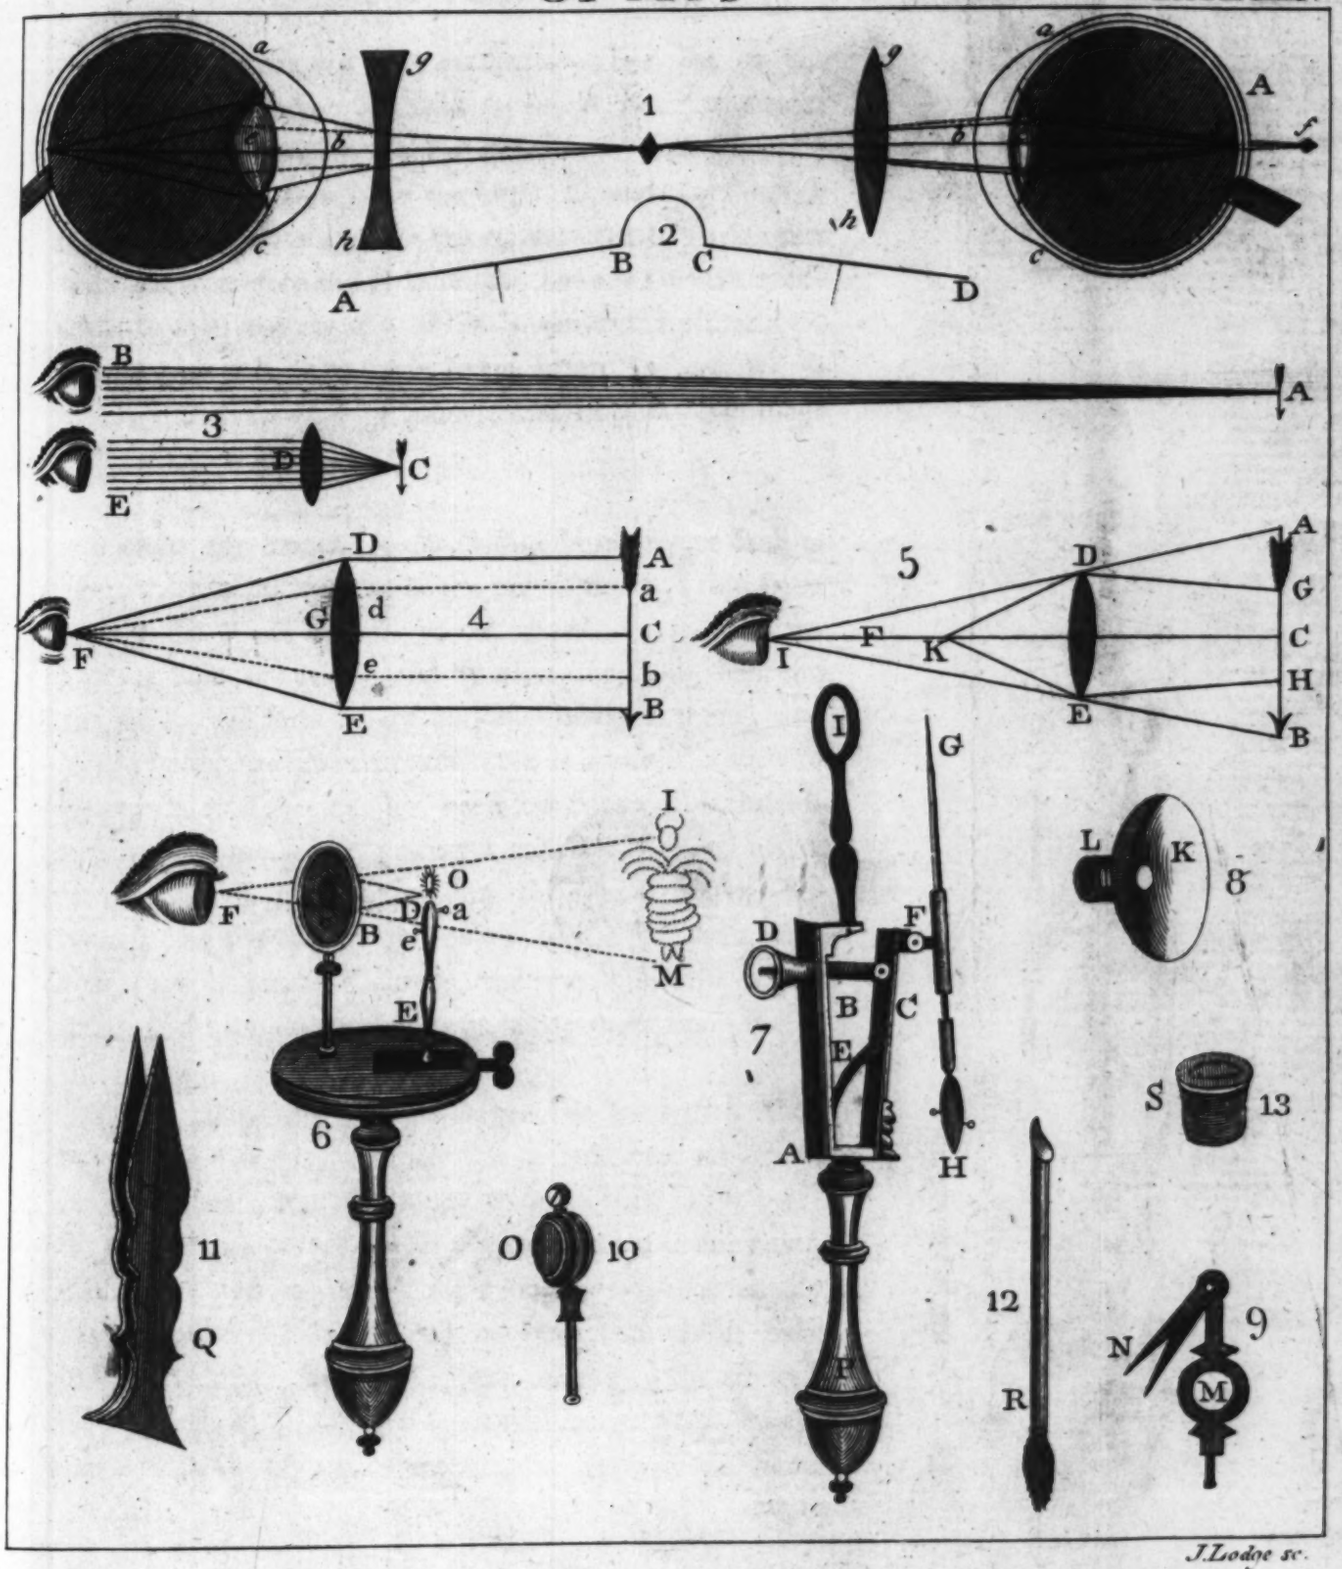

J.Lodge sc.


BRITISH MUSEUM
15
61
NOV

too flat, as in the eye A, their focus will not be on the retina, as at d, where it ought to be, in order to render viſion diſtinct; but, beyond the eye as at f. Conſequently thoſe rays which flow from the object C, and paſs through the humours of the eye, are not converged enough to unite at d: and therefore the obſerver can have but a very indiſtinct view of the object. This is remedied by placing a convex glaſs g h, of a proper focus, before the eye, which makes the rays converge ſooner, and imprints the image duly on the retina at d.

If either the cornea, or chryſtalline humour, or both of them, be too convex, as in the eye f, the rays that enter in from the object C, will be converged to a focus in the vitreous humour, as at f, and by diverging from thence to the retina, will form a very confuſed image thereon: and ſo, of courſe, the obſerver will have as confuſed a view of the object, as if his eye had been too flat. This inconvenience is remedied by placing a concave glaſs g h before the eye; which glaſs, by cauſing the rays to diverge between it and the eye, lengthens the focal diſtance ſo, that if the glaſs be properly choſen, the rays will unite at the retina, and form a diſtinct picture of the object upon it.

When glaſſes are put in frames for ſpectacles, their frames ought not to be ſtraight, ſo as both eyes may be as the ſame plane; but they ought to be ſo bent in the middle, that the axis of both glaſſes may be directed to one point, at ſuch a diſtance as you generally look with ſpectacles. By this means the eyes will fall perpendicular upon both glaſſes, and make the object appear diſtinct. But if they fall obliquely upon the glaſſes, it will cauſe a confuſed appearance in the objects; therefore, the ſhape of the frame

Fig. 2. ought to be as repreſented when A B is the plane as one glaſs is fixed, and C D the other.

Spectacles are the moſt uſeful optical machine in the world. There are few people that grow into years, but have occaſion for them to help their defective eyes, and without them would be uſeleſs in a great many occaſions of life.

Of MICROSCOPES.

THE word microſcope imports an inſtrument for viewing ſeveral ſmall objects. I have before obſerved, that nature has ſo formed the human eye, that we cannot diſtinctly view an object at a nearer diſtance than ſix inches; and ſince there is an affinity of objects, which at that diſtance appear either as points, or are wholly imperceptible, whatſoever inſtrument or contrivance will render ſuch minute objects viſible and diſtinct, we properly call a microſcope.

It is uſual to ſay, that the microſcope magnifies objects ſeen through it; but this is true only with regard to the apparent, not the real magnitude of objects; they indeed appear to be larger with, than without a microſcope, but, in truth they are not; and the reaſon why they appear to be magnified will be eaſy to apprehend, by any perſon who underſtands the nature of the optic angle.

The apparent magnitude of objects is meaſured by the angle which they are ſeen under by the eye; and thoſe angles are reciprocally as the diſtances from the eye. If, therefore, at the diſtance of ſix inches, I can but juſt diſcern

cern an object, and then by an interposing a lens, or other body, I can come to view that very object at a nearer distance, the object will appear to be as much larger through the lens, than before to the naked eye, as its distance from the lens is less than its distance from the eye.

That this is the case, is evident, from where A is a point in an object not clearly visible to the naked eye, at a less distance than A B, because the rays which proceed from it are too divergent to admit of distinct vision till they have passed that distance; but if the same object be placed in the focus C of the lens D, the rays which proceed from it will become parallel, by passing through the said lens, and therefore the object is distinctly visible to the eye E, placed any where before the lens D. Consequently it will appear as much larger, through the lens than to the naked eye, as C D is less than A B. Fig. 3.

If an object A B be placed in one focus C of a lens D E, and the eye in the other focus F, the eye will see just so much of the object as is equal to the diameter of the lens; for the rays of A D and B E, which go from the object to the extremities of the lens D and E, and are united at the focus F, must necessarily proceed from the object to the lens parallel to the axis F C, and therefore parallel to each other; consequently the part of the object A B, seen by the rays D F, E F, will be equal to the diameter D E of the said lens. Fig. 4.

If only the part d e of the lens be open, then only so much of the object a b, as is equal thereto, will be perceived by the eye. Now since A B is equal to D E, or a b to d e, therefore the angle D F E, or d F e, is the optic

angle under which the part of the object A B or a b appears to the eye at F; and ſince G F is but one half F C, therefore the angle D F E, or d F e, is double to that under which the part A B or a b would appear to the naked eye at the diſtance F C: that is, the eye ſees the object, ſituate as above, twice as large with the lens as it would do without it.

If you would ſee a portion of an object larger than the lens, your eye muſt be placed nearer the lens than its focus. Let the lens be D E, its two foci F and C; in the focus C let there be an object A B larger than the lens; ſuppoſe the rays A D, B E, proceed from the extremities of the object to thoſe of the lens, it is evident from the figure they will be convergent, and therefore will by the lens be united in a point K, between the lens D E, and its focus F: if then the eye be placed at K, it will take into its view an object greater than the lens D E.

Fig. 5.

Again, let G H be a portion of an object A B, leſs than the lens D E; draw G D, H E, which will be diverging rays, and therefore will be united at a point I, farther diſtant from the lens than the focus F: hence, if an eye be placed farther from the lens than its focal diſtance, it can never ſee any object, or part of an object, at one view, ſo large as the lens, but always ſmaller. And univerſally, the viſible part of an object will be to the lens, as the focal diſtance of the lens to the diſtance of the eye.

Since then it is evident, the nature of a convex lens is ſuch as will render an object diſtinctly viſible to the eye, at the diſtance of its focus, the reaſon why they are uſed

as

as microſcopes is exceeding plain. For ſuppoſe the diſtance A B be ſix inches, where the naked eye B, can but juſt perceive the object A diſtinctly, and let the focal diſtance C D of the lens D be half an inch; then ſince C D is but one twelfth of A B, the length of the object at C will appear twelve times as large as at A; if it were a ſurface it would be one hundred and forty-four times as great; and the ſolidity or bulk would be magnified one thouſand ſeven hundred and twenty-eight times. Fig. 3.

If C D, the focal diſtance of the lens D, be but one fourth part of an inch, then will that be but one twenty-fourth of A B, equal ſix inches, and ſo the length of objects will be magnified twenty-four times; the ſurface five hundred and ſeventy-ſix times, and the ſolidity thirteen thouſand eight hundred and twenty-four times, for thoſe numbers are the ſquare and cube of twenty four. From whence it appears, that ſingle glaſs lenſes make very good microſcopes, which have theſe advantages, that the object appears moſt clear, they lie in little room, may be carried about any where, are to be had for a ſmall price, and are moſt eaſy to be uſed.

The form of a very convenient microſcope, is where A B is a circular piece of wood, ivory, &c. in the middle of which is a ſmall hole, one twentieth of an inch diameter; upon this hole is fixed, with a wire, a ſmall lens C, whoſe focal diſtance is C D. At that diſtance is a pair of plyers D E, which may be adjuſted by means of the ſliding ſcrew as in the figure, and opened by means of the two little ſtuds a, e; with theſe you take up any ſmall object O, and view it with the eye placed in the other focus of the lens at Fig. 6.

F.

F. and according to the focal length of the lens, the object O will appear more or leſs magnified, as repreſented at I M. If the focal length be half or one-fourth of an inch, the length, ſurface, and bulk of the object will be magnified as before deſcribed. This ſmall inſtrument may be put into a caſe, and carried about in the pocket without any incumbrance. I have made trial of various lenſes, and find thoſe whoſe focal lengths are 3-tenths, 4-tenths, and 5-tenths of an inch, the beſt for common uſe.

Since the nearer the eye can approach to an object, the larger it appears, it is plain a double and equally convex lens is far preferable to a plano-convex lens; becauſe if the ſphere or convexity be the ſame, the focal length of the former is but half as long as of the latter: and ſince the double convex conſiſts of two ſegments of a ſphere, the more an object is to be magnified, the greater muſt the convexity be, and therefore the ſmaller the ſphere; till at laſt the utmoſt degree of magnifying will require that theſe ſegments become hemiſpheres, and conſequently the lens will be reduced to a perfect ſpherule, or very ſmall ſphere.

If the radius of the ſpherule be one tenth of an inch, the eye will have diſtinct viſion of an object by means thereof, at the diſtance of a radius and half, i. e. 3-twentieths of an inch, which, as it is but the 40th part of ſix inches, ſhews that the length of an object will be magnified forty times, the ſurface one thouſand ſix hundred times, and the ſolidity ſixty-four thouſand times, by ſuch a ſmall ſphere.

If the radius of a ſpherule be but one-twentieth of an inch, then will the eye have diſtinct viſion of an object at the diſtance of 3-fortieths of an inch, which, as it is but the

80th

80th part of ſix inches, ſhews the length of objects will appear eighty times greater, the ſurface ſix thouſand four hundred times, and the bulk five hundred and twelve thouſand times greater to the naked eye at ſix inches diſtance.

Again, if the diameter of a ſpherule be one twentieth of an inch, or the radius one fortieth, then will the eye approach the object ſo near as 3-80th part of an inch, which is but the 160th part of ſix inches; and therefore the length of objects will be magnified one hundred and ſixty times, the ſurface twenty-five thouſand ſix hundred times, and the ſolidity four million and ninety-ſix thouſand times by this ſpherule; which is ſo great a power of magnifying, as ſurpaſſes all human imagination and comprehenſion.

In uſing theſe ſpherule microſcopes, the objects are to be placed in one focus, and the eye in the other; and ſince the focus is ſo exceeding near the glaſs, it is impoſſible to view any but pellucid bodies: for if any opake object were to be applied, the eye being as it were juſt on the ſpherule, would entirely prevent any light falling on it, and it would be too obſcure to be viewed.

It was with this ſort of microſcopes, that the famous Dutch philoſopher Mr. *Leeuwenhoek* made ſuch wonderful diſcoveries; and it muſt be with theſe, if with any, that the corpuſcles or atoms, of which bodies conſiſt, are to be diſcovered; which the great *Sir Iſaac Newton* thought was poſſible. But the great difficulty of making very ſmall and at the ſame time, very good ones; their prejudice to the eyes in poring very hard and near; the trouble of placing objects at a due diſtance, and the very ſmall part which can be

be ſeen of any, make this ſort of microſcopes very little known or uſed.

Of a ſingle Microſcope for Opake Objects.

THIS microſcope remedies the inconvenience of having the dark ſide of an object next the eye, which has hitherto been an unſurmountable obſtruction to the making obſervations on opake objects with any conſiderable degree of exactneſs or ſatisfaction; for in all other contrivances commonly known, the nearneſs of the inſtrument to the object (when glaſſes that magnify much are uſed) unavoidably overſhadows it ſo much, as to render its appearance obſcure and undiſtinct. And, notwithſtanding, ways have been tried to point light upon an object, from the ſun, or a candle, by a convex glaſs placed on the ſide thereof; the rays from either can be thrown upon it in ſuch an acute angle only, that they ſerve to give a confuſed glare, but are inſufficient to afford a clear and perfect view of the object.

But in this new microſcope, by means of a concave ſpeculum of ſilver, highly poliſhed, in whoſe center a magnifying lens is placed, ſo direct and ſtrong a light is reflected upon the object, that it may be examined with all imaginable eaſe and pleaſure.

The apparatus for this purpoſe has afforded me more delight and ſatisfaction than I am able to deſcribe; and whoever tries it, will, I believe, join in my opinion, that he never ſaw an opake object with ſo much clearneſs, and in ſo perfect and true a manner.

The

The ſeveral parts of this inſtrument commonly made of braſs, are as follows:

Through the firſt ſide A, paſſes a fine ſcrew B, the other end whereof is faſtened to the moveable ſide C. Fig. 7.

D is a nut adapted to the ſaid ſcrew by the turning of which the two ſides A C are gradually brought together.

E is a ſpring of ſteel, that ſeparates the ſaid two ſides when the nut is unſcrewed.

F a piece of braſs turning round in a ſocket, whence proceeds a ſmall ſpring tube moving upon a rivet, through which tube there runs a ſteel wire, one end whereof terminates in a ſharp point G, and the other hath a pair of plyers H faſtened to it. The point and plyers are to thruſt into or to take up and hold any inſect or object: and either of them may be turned upwards, as ſuits your purpoſe beſt.

I is a ring of braſs with a female ſcrew within it, mounted on an upright piece of the ſame metal, which turns round on a rivet, that it may be ſet at a due diſtance when the leaſt magnifiers are employed. This ring receives the ſcrews of all the magnifiers.

P a handle turned of wood, to ſcrew into the inſtrument when it is made uſe of.

K a concave ſpeculum of ſilver, poliſhed as bright as poſſible, in the center of which a double convex lens is Fig. 8.

placed, with a proper aperture to look through it. On the back of this ſpeculum a male ſcrew L is made to fit the braſs ring I, to ſcrew into the ſaid ring at pleaſure.

There are four of theſe concave ſpecula, of different magnifying powers, to be uſed as objects to be examined may require. The greateſt magnifiers muſt always have the leaſt apertures.

Fig. 8. M a round object-plate, one ſide white and the other black, intended to render objects the more viſible, by placing them, if black, on the white, and if white on the black ſide. A ſteel ſpring N, turns down on each ſide to make any object faſt: and iſſuing from the object plate is a hollow pipe to ſcrew it on the needle's point G.

Fig. 10. O is a ſmall box of braſs, with a glaſs on each ſide, contrived to confine any living object, in order to examine it: this alſo has a pipe to ſcrew upon the end of the needle G.

Fig. 11. Q a pair of braſs plyers, to take up any object, or manage it with conveniency.

Fig. 12. R a ſoft hair bruſh, to clean the glaſſes or ſpecula, or apply a drop of any liquid to the iſinglaſs of the box O, in order to view the animalcules.

Fig. 13. S a ſmall ivory box for the talcs, to be placed when wanted in the ſmall braſs box O.

Fig. 7. When you would view any object, ſcrew the ſpeculum, with the magnifier you would think beſt to uſe, into the braſs

braſs ring I. Place your object either on the needle G, in the plyers H, on the object-plate M, or in the braſs hollow box O, as may be moſt convenient, according to the nature and condition of it: then holding up your inſtrument by the handle P, look againſt the light, through the magnifying lens, and by means of the nut D, together with the motion of the needle, by managing its lower end, the object may be turned about, raiſed, or depreſſed, brought nearer the glaſs, or put farther from it, till you hit the true focal diſtance, and the light be ſeen reflected from the ſpeculum ſtrongly upon the object: by which means, it will be ſhewn in a manner ſurprizingly diſtinct and clear. And for this purpoſe, the light of the ſky, or of a candle, will anſwer to your ſatisfaction.

This microſcope is principally intended for opake objects, but tranſparent ones may alſo be viewed by it: obſerving only, that when ſuch come under examination, it will not always be proper to throw on them the light reflected from the ſpeculum: for the light tranſmitted through them meeting the reflected light, may, together, produce too great a glare. A little practice will teach how to regulate both theſe lights to good advantage.

There is reaſon to expect great diſcoveries may be made by the apparatus above deſcribed, as opake objects are a large field, but little hitherto examined, by reaſon of the great difficulty in doing it.

Of Mr. Wilſon's ſingle Pocket Microſcope.

Plate XIV. Fig. 1. THE body is made either of braſs, ivory, or ſilver, as repreſented A A B B.

C C is a long fine-threaded male ſcrew, that turns into the body of the microſcope.

D a convex glaſs at the end of the ſaid ſcrew.

1. Two concave round pieces of thin braſs, with holes of different diameters in the middle of them, to cover the ſaid glaſs, and thereby diminiſh the aperture when the greateſt magnifiers are employed.


E E, three thin plates of braſs within the body of the microſcope, one whereof is bent ſemicircularly in the middle, ſo as to form an arched cavity for the reception of a tube of glaſs, whereas the two flat plates are to receive and hold the ſliders between them.

F a piece of wood or ivory, arched in the manner of the ſemicircular plate, and cemented thereto.

G the other end of the body of the microſcope, where a hollow female ſcrew is adapted to receive the different magnifiers.

H a ſpiral ſpring of ſteel, between the ſaid end C and the plates

OPTICS

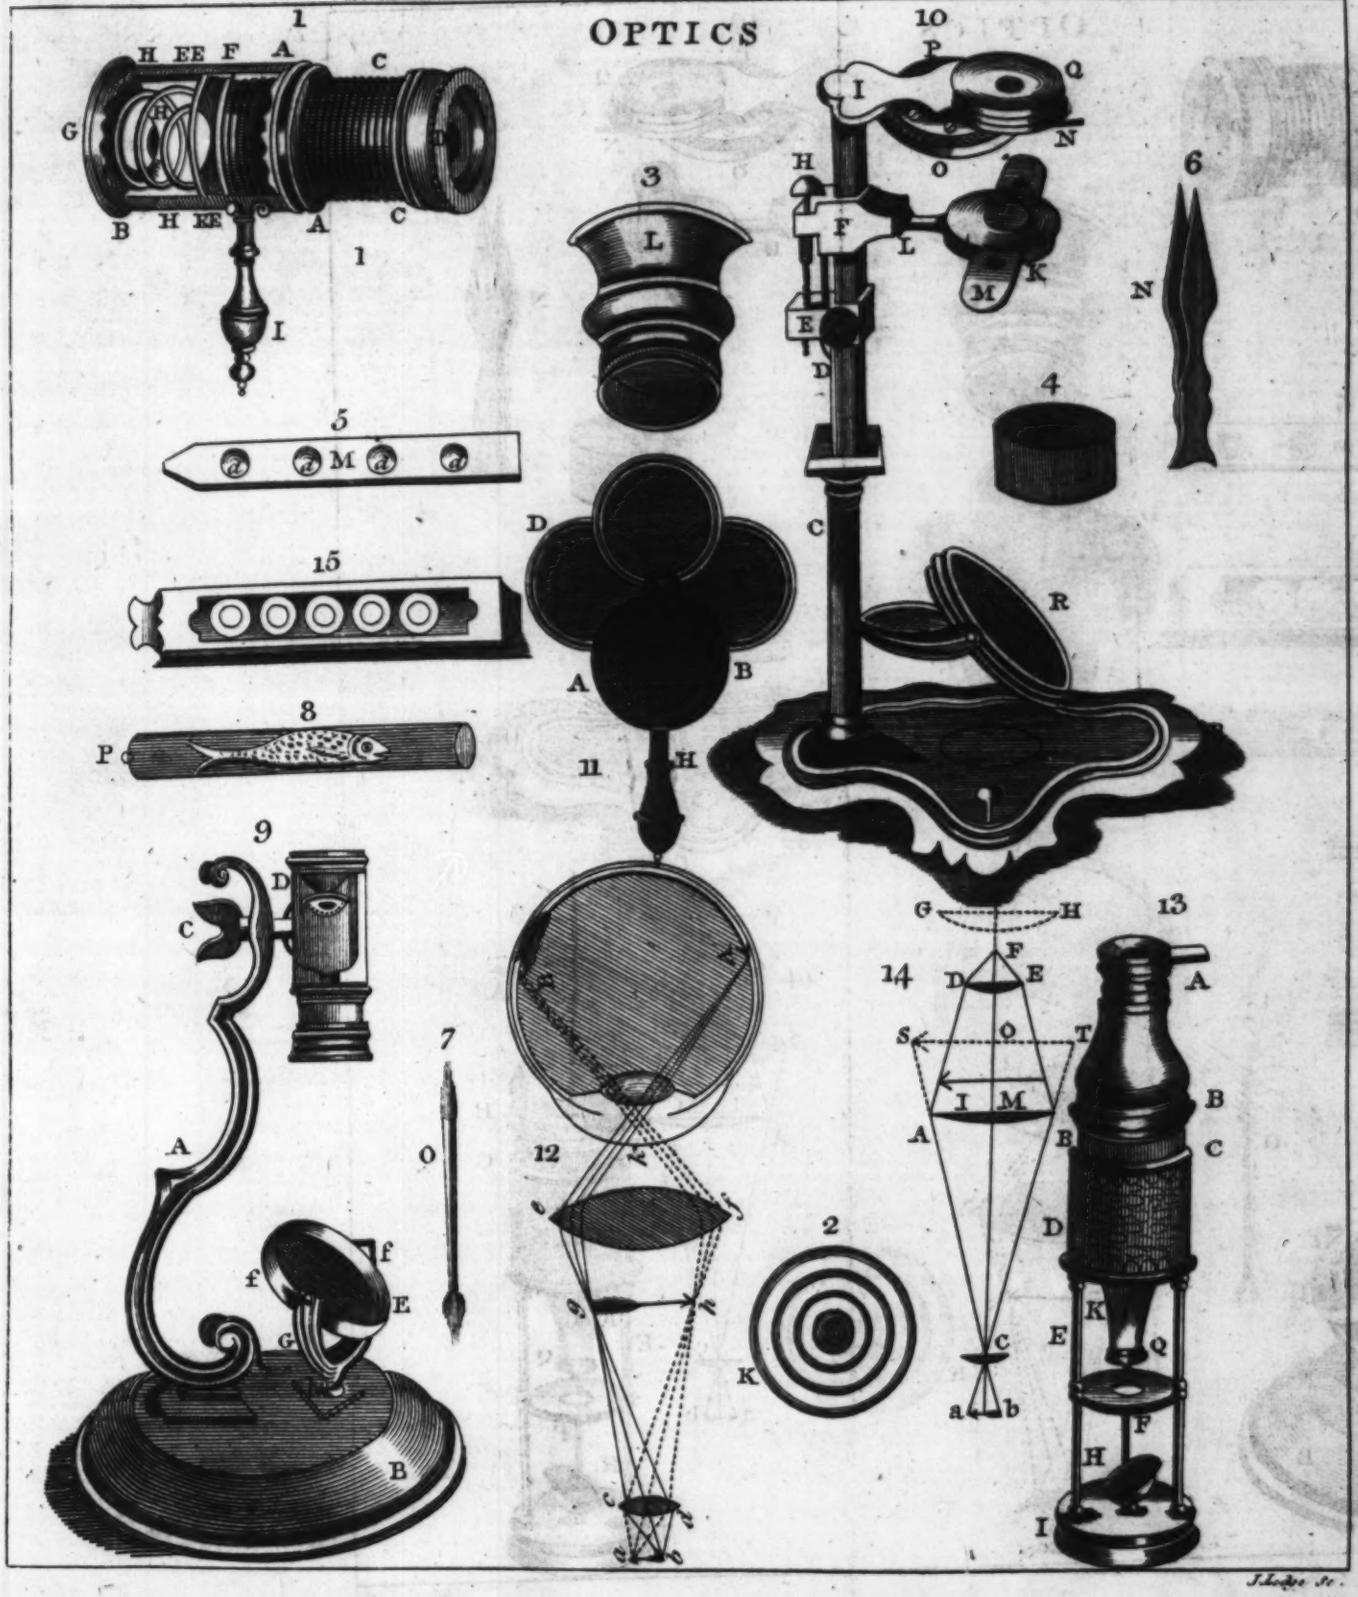

J. Lodge Sc.

BRITISH MUSEUM
15 NOV 81

plates of braſs; intended to keep the plates in a right poſition, and counteract againſt the long ſcrew C C.

I a ſmall turned handle, for the better holding of the inſtrument, to ſcrew on or off at pleaſure.

To this microſcope belong ſeven different magnifying glaſſes: ſix of them are ſet in ſilver, braſs, or ivory, as in K, and marked 1, 2, 3, 4, 5, 6, the loweſt numbers being the greateſt magnifiers. Fig. 2.

L is the ſeventh magnifier, ſet in the manner of a little barrel, to be held in the hand for the viewing any larger object. Fig. 3.

The figure may be of further uſe, by applying a thin cap, with a hole in it, a quarter of an inch ſquare, exact in the focus of the lens; by which means, when a piece of linen cloth is applied upon the braſs, and viewed through the other end, the threads will appear greatly magnified, ſo that they may be counted, and thereby the quality of the cloth may be aſcertained by calculation. Fig. 4.

M is a flat ſlip of ivory, called a ſlider, with four round holes through it, wherein to place objects between two glaſſes or pieces of Muſcovy talc, as they appear d d d d. Fig. 5.

Eight ſuch ivory fliders, and one of braſs, are uſually ſold with this microſcope; ſome with objects placed in them, and others empty, for viewing any thing that may offer: but whoever pleaſes to make a large collection of objects, may have as many as he deſires.

The

The braſs ſlider is to confine any ſmall object, that it may be viewed without cruſhing or deſtroying it.

Fig. 6. N is a forceps or pair of plyers, for the taking up inſects or other objects, and adjuſting them to the glaſſes.

Fig. 7. O is a little hair bruſh, or pencil, wherewith to wipe any duſt from off the glaſſes, or to take up any ſmall drop of liquid one would examine, and put it upon the talcs or iſinglaſs.

Fig. 8. P is a tube of glaſs, contrived to confine living objects, ſuch as frogs, fiſhes, &c. in order to diſcover the blood, as it ſtreams along the veins and arteries.

All theſe particulars are contained in a little neat box, very convenient for carrying in the pocket.

When an object is to be viewed, thruſt the ivory ſlider, in which the ſaid object is placed, between the two flat
Fig. 1. braſs plates E E: obſerving always to put that ſide of the ſlider where the braſs rings are, fartheſt from your eye. Then ſcrew on the magnifying glaſs you intend to uſe, at the end of the inſtrument G; and looking through it againſt the light, turn the long ſcrew C C, till your object be brought to fit your eye; which you will know by its appearing then perfectly diſtinct and clear. 'Tis beſt to look at it firſt, through a magnifier that can ſhew the whole thereof at once, and afterwards to inſpect the ſeveral parts more particularly with one of the greateſt magnifiers: for thus you will gain a true idea of the whole, and of all its parts. And though the greateſt magnifiers can ſhew

but

but a minute portion of any object at once, ſuch as the claw of a flea, the horn of a louſe, or the like; yet by gently moving the ſlider that contains your object, the eye will gradually overlook it all; and if any part ſhould be out of diſtance, the ſcrew C C will eaſily bring it to the true focus.

As objects muſt be brought very near the glaſſes when the greateſt magnifiers are uſed, be particularly careful not to ſcratch them as you move it in or out. A few turns of the ſcrew C C will eaſily prevent this miſchief, by giving them room enough.

You may change the objects in your ſliders, for what others you think proper, by taking out the braſs ring with the point of a penknife; the talc will then fall out, if you but turn the ſliders; and after putting what you pleaſe between them, by replacing the braſs rings, you will faſten them as they were before. 'Tis proper to have ſome ſliders furniſhed with talcs, but without any objects between them, to be always in readineſs for the examination of fluids, ſalts, ſands, powders, the farina of flowers, or any other caſual objects of ſuch ſort as need only be applied to the outſide of the talc.

The circulation of the blood may eaſieſt be ſeen in the tails and fins of fiſhes, in the fine membranes between a frog's toes, or beſt of all, in the tail of a water-newt. If your object be a ſmall fiſh, place it within the tube, and ſpread its tail or fin againſt the ſide thereof: if a frog, chuſe ſuch an one as can but juſt be got into your tube, and with a pen or ſtick expand the tranſparent membrane between the

the toes of the frog's hand foot as wide as you are able. When your object is ſo adjuſted, that no part thereof can intercept the light from the place you intend to view, unſcrew the long ſcrew C C, and thruſt your tube into the arched cavity, quite through the body of the microſcope; then ſcrew it to the true focal diſtance, and you will ſee the blood paſſing along its veſſels with a rapid motion, and in a moſt ſurpriſing manner.

Make uſe of the third or fourth magnifier for frogs or fiſhes; but for the tails of water-newts, the fifth, or ſixth will do; becauſe the globules of their blood are twice as large as thoſe of frogs or fiſh. The firſt or ſecond magnifier cannot well be employed to this purpoſe; for the thickneſs of the tube wherein the object lies, will ſcarce admit its being brought ſo near as the foeal diſtance of the magnifier.

A Pocket Microſcope, with a Reflecting Speculum.

Fig. 9. A is a ſcroll of braſs, fixed upright on a round pedeſtal of wood B, ſo as to ſtand perfectly firm and ſteady.

C is a braſs ſcrew, that paſſes through a hole in the upper limb of the ſcroll, into the ſide of the Microſcope D, and ſcrews it faſt to the ſaid ſcroll.

E a concave looking-glaſs or ſpeculum, ſet in a box of braſs, which hangs in the arch G, by two ſmall ſcrews f f, that ſcrew into the oppoſite ſides thereof.

At

At the bottom of the ſaid arch is a pin of the ſame metal, exactly fitted to a hole h, in the wooden pedeſtal, made for the reception of the ſaid pin.

As the arch turns to this pin, and the ſpeculum turns on the ends of the arch, it may, by this two-fold motion, be eaſily adjuſted, in ſuch a manner, as to reflect the light of the ſky, the ſun, or a candle, directly upwards, through the microſcope that is fixed perpendicularly over it; and by ſo doing, may be made to anſwer almoſt all the ends of the large double reflecting microſcope.

The body of the microſcope may alſo be fixed horizontally, and objects may be viewed in that poſition, by any light you chooſe; which is an advantage the reflecting microſcope has not.

It may alſo be rendered farther uſeful, by means of a ſlip of glaſs, one end of which being thruſt between the plates where the ſliders go, and the other extending to ſome diſtance, ſuch objects may be placed thereon, as cannot be applied to the ſliders: and then, having a limb of braſs that may be faſtened to the body of the microſcope, and extend over the projecting glaſs a hollow ring, wherein to ſcrew the magnifiers, all ſorts of ſubjects may be examined with great conveniency, if a hole be made in the pedeſtal, to place the ſpeculum exactly underneath, and thereby throw up the rays of light as in the next figure.

The pocket microſcope thus fixed, is, if I may preſume to judge, as eaſy and pleaſant in its uſe, and as fit for the moſt curious examination of the animalcules and ſalts in

fluids, of the farinæ in vegetables, of the circulations in ſmall creatures: in ſhort, it is likely to make conſiderable diſcoveries in objects that have ſome degree of tranſparency, as any microſcopes I have ever ſeeen or heard of.

Another ſingle Microſcope on a Foot or Stand.

THE ſingle microſcopes hitherto deſcribed, have been contrived in many different forms, which on ſome occaſions are very neceſſary and convenient. I have here given the form or ſtructure of one which I think, in ſome caſes, preferable to any I have ſeen.

This is the general form of the inſtrument in which A B is the baſis or foot.

Fig. 10. C D I is the ſtem, of which the lower part C is in the form of a pillar; and the upper part D has four plain ſides.

E, F, are two ſquare ſockets of braſs, moveable up and down together upon the ſquare part of the ſtem, being connected by a common ſcrew; but this motion is checked by the conſtant preſſure of a ſpring.

G is a ſcrew by which the part E is fixed to the ſtem.

H is an adjuſting ſcrew, by which the part F is gradually moved up and down: and thereby K L, the ſtage on which the objects are placed, has M N the ſlider, with its objects, duly adjuſted to the focus of the magnifiers.

L is

L is a joint by which the ſtage is capable of an horizontal motion, to ſhew any part of the object without moving the ſlider.

O P is a circular piece of braſs conſiſting of two plates, between which are placed ſix ſmall lenſes or magnifiers in a circle near the extreme part, and is moveable on a ſcrew, in its center, which goes into I Q a piece of braſs fixed very firmly on the top of the ſtem; upon this is Q a circular piece of braſs ſoldered on, with a hole in the center, under which the circle of glaſſes below paſſes, and, conſequently, any one of the lenſes being brought to the center of this hole, will be exactly over the center of the hole in the ſtage, and ſhew the objects when adjuſted to the focus of the ſaid lens.

R is the ſpeculum that reflects the light through the microſcope.

A Megalaſcope for viewing large Objects.

This is an optical inſtrument that may be properly called a megalaſcope for the hand; becauſe it is adapted for viewing all the larger ſort of ſmall objects, ſuch as inſects, flowers, minerals, linen, &c. to a very great advantage; as with three glaſſes only it has ſeven different magnifying powers.

A B is the caſe of braſs, ſilver, &c. Fig. 11.

D, E, F, three ſeveral lenſes with different magnifying powers, which are all contained in the ſaid caſe, and turned out at pleaſure.

H the handle.

The three glaſſes ſingly, afford three magnifying powers; and by combining two and two, we make three more; for D with E makes one, D with F another, and E with F a third; which with the three ſingly make ſix; and laſtly, all three combined together make another, ſo that upon the whole, there are ſeven powers of magnifying with three glaſſes only.

Of double or compound Microſcopes.

Fig. 12. The double or compound Microſcope, conſiſts of an object glaſs c d, and an eye glaſs e f. The ſmall object a b is placed at a little greater diſtance from the glaſs c d than its principal focus, ſo that the pencils of rays flowing from the different points of the object, and paſſing through the glaſs, may be made to converge and unite in as many points between g and h, where the image of the object will be formed: which image is viewed by the eye through the eye glaſs e f. For the eye glaſs being ſo placed, that the image g h may be in its focus, and the eye much about the ſame diſtance on the other ſide, the rays of each pencil will be parallel, after going out of the eye glaſs, as at e and f, till they come to the eye at k, where they will begin to converge by the refractive powers of the humours; and after having croſſed each other in the pupil, and paſſed through the chryſtalline and vitreous humours, they will be collected into points on the retina, and form the large inverted image A B thereon.

The

The magnifying power of this microſcope is as follows: ſuppoſe the image g h to be ſix times the diſtance of the object a b from the object glaſs c d; then will the image be ſix times the length of the object: but ſince the image could not be ſeen diſtinctly by the bare eye at a leſs diſtance than ſix inches, if it be viewed by an eye glaſs e f, of one inch focus, it will thereby be brought ſix times nearer the eye; and conſequently viewed under an angle ſix times as large as before; ſo that it will be again magnified ſix times; that is, ſix times by the object glaſs, and ſix times by the eye glaſs, which multiplied into one another, makes thirty-ſix times; and ſo much is the object magnified in diameter more than what it appears to the bare eye; and conſequently thirty-ſix times thirty-ſix, or one thouſand two hundred and ninety ſix times in ſurface.

But becauſe the extent or field of view is very ſmall in this microſcope, there are generally two eye glaſſes placed ſometimes cloſe together, and ſometimes an inch aſunder; by which means, although the object appears leſs magnified, yet the viſible area is much enlarged by the interpoſition of a ſecond eye glaſs; and conſequently a much pleaſanter view is obtained.

The Deſcription and Uſe of a compound Microſcope.

Is the form of a compound microſcope for the pocket. Fig. 13.

A Q is the body or internal part which is moveable up and down in C D an external caſe of wood, braſs or ſilver.

E one

E one of the three pillars which ſupport the inſtrument.

F a plate fixed (horizontally) to the legs, uſually called the ſtage.

G a hole in the central part, in which glaſs, and other parts of the apparatus are placed, with objects to be viewed.

H an illuminating or reflecting ſpeculum.

I the foot of the inſtrument.

K is a pipe to which is ſcrewed,

Q a braſs button or caſe to hold the magnifier.

In this compound microſcope there are generally three (ſometimes four) glaſſes employed to produce the effect, viz. 1. The magnifying lens at Q which makes a large image in the upper part of the ſmall object below. 2. A large lens at B, called the body glaſs, which is the cauſe of a larger field of view. 3. An eye glaſs at A, by which we view the enlarged image of the object, in its focus.

The Method of computing the magnifying Power of ſingle and double Microſcopes.

THE magnifying power in all optical inſtruments depends upon this one principle, that every object is apparently greater or leſs in proportion, as it is nearer to, or farther

farther from the eye; becauſe the nearer it is, the larger is the viſual angle under which it appears, *& vice verſa*.

But the eye is ſo formed as to admit of diſtinct viſion by ſuch rays only as are nearly parallel; and therefore every object muſt be removed to ſuch a diſtance from the eye that the rays of light iſſuing from every point thereof, may fall upon the eye with ſmall divergency, or nearly parallel, which diſtance is in different eyes from ſix to eight inches, as any one may find by trial.

Now, ſince a convex glaſs convenes parallel rays to a point or focus; therefore, on the contrary, if an object be placed in the focus of ſuch a lens, the rays proceeding from each point will be refracted parallel to the eye, and thereby produce diſtinct viſion of that object in its focus.

Hence then it follows, that if a b be a very ſmall object in the focus of the glaſs c, whoſe focal diſtance is one inch, the eye applied to the lens C will have the diſtinct viſion thereof; and this being at a diſtance ſix, ſeven, or eight times nearer than the eye alone could clearly ſee it, it muſt appear ſo many times larger than to the naked eye; and therefore we properly ſay, it is magnified to ſuch eyes, ſix, ſeven, or eight times in length and breadth. Fig. 14.

But all ſurfaces are magnified in proportion to the ſquares of their lengths or ſides; therefore the ſurfaces of objects are magnified thirty-ſix, forty-nine, or ſixty-four times by a lens of one inch focal diſtance.

Alſo the bulk or magnitude of the whole body, will be magnified

magnified in proportion to the cubes of the ſides or length, and therefore all ſolid bodies will, by ſuch a lens, be magnified two hundred and ſixteen, three hundred and forty-three, or five hundred and twelve times, to ſuch eyes reſpectively.

If the lens C were but of half an inch focal diſtance, the lengths of the objects would be magnified twice as much; the ſurfaces four times, and the magnitude or bulk, eight times as much as before.

If the focal diſtance of the lens C be a quarter of an inch, then the lengths are magnified four times as much, viz. twenty-four, twenty-eight, or thirty-two times; the ſurfaces ſixteen times as much, or 576 times more than to the naked eye at ſix inches diſtance; and ſolid bodies are magnified ſixty-four times more than by the lens of a whole inch focal diſtance.

Once more; ſuppoſe the lens ſo ſmall that its focal diſtance is but 1-tenth of an inch, then the length of an object is magnified ſixty, ſeventy, or eighty times; the ſurface 3,600, 3,900, or 6,400 times, and the ſolidity or whole bulk 216,000, 343,000, or 512,000 times, or ſo much larger do the bodies of mites, or their eggs, appear than to the naked eye at ſix, ſeven, or eight inches diſtance.

After the ſame manner you may compute the magnifying power of lenſes of 1-twentieth, 1-thirtieth, 1-fortieth, and even 1-fiftieth part of an inch focal diſtance, which may be made if required; but they are with difficulty uſed. By a lens 1-fiftieth of an inch, the length is magnified 300 times;

times; and the ſurface 90,000 times; and the ſolidity 27,000,000 times.

But theſe enormous powers of magnifying are much better effected in compound microſcopes, and be that in what degree you pleaſe, it is thus eaſily eſtimated. Let C be the object lens in the cell Q, Fig 13, of the compound microſcope, if then a ſmall object, a b, be placed on the ſtage at G, a little more than the focal diſtance, there will be formed by the ſaid lens C, a large image S T, in the upper part of the microſcope, and this image is viewed through the glaſs G H in its focus below at O. Fig. 13.

Now it is eaſy to underſtand that the image S T is as much larger than the object a b, as the diſtance C A, exceeds the diſtance C a from the lens. Suppoſe the image S T ſix times larger than the object a b; then if it be viewed by a lens G H of one inch focal diſtance, the image S T will appear magnified ſix times at leaſt, and therefore the object a b will be magnified ſix times ſix, or 36 times in length; and 36 times 36, or 1,296 times in ſurface; and 36 times 1,296, or 46,656 times in the bulk of ſolidity. And yet with theſe great powers of magnifying, the lens C may not be of leſs than half an inch focal diſtance, in the leaſt ſort of compound pocket microſcopes.

But with a ſingle eye-glaſs G H, we have too ſmall a field of view, therefore we uſe two, viz. A B and D E; the firſt contracts the image S T into another I M, which is leſs, and this is viewed by the eye-glaſs D E. Now both theſe glaſſes may have a magnifying power equal to that of a given ſingle glaſs G H by this rule; let their diſtance be equal to the difference of their focal lengths, and their

magnifying power will be equal to that of a lens whose focal diſtance is half that of the greater A B.

For example, ſuppoſe the focal length of A B to be two inches 1-half, and that of D E one inch; then if their diſtance be one inch 1-half, their joint magnifying power will be equal to that of a ſingle lens G H, whoſe focal diſtance is one 1-4th equal half that of A B. By the two eye-glaſſes the rays are converged to the eye at the compound focus F, much leſs affected by the errors ariſing from the aberration of rays, both from their different refrangibility, and the figure of the glaſſes.


The Solar, or Camera Obſcura Microſcope.


THIS microſcope depends on the ſun-ſhine, and muſt be made uſe of in a darkened chamber, as its name implies.

It is compoſed of a tube, a looking-glaſs, a convex lens, and Wilſon's ſingle pocket microſcope before deſcribed.

The ſun's rays being directed by the looking glaſs through the tube upon the object, the image or picture of the object is thrown, diſtinctly and beautifully, upon a ſcreen of white paper, or a white linen ſheet, placed at ſome diſtance to receive the ſame; and may be magnified to a ſize beyond the imagination of thoſe who have not ſeen it: for the farther off the ſcreen is removed, the larger will the object appear; inſomuch, that a louſe may be magnified to the length of five or ſix feet, or even a great deal more: but

it

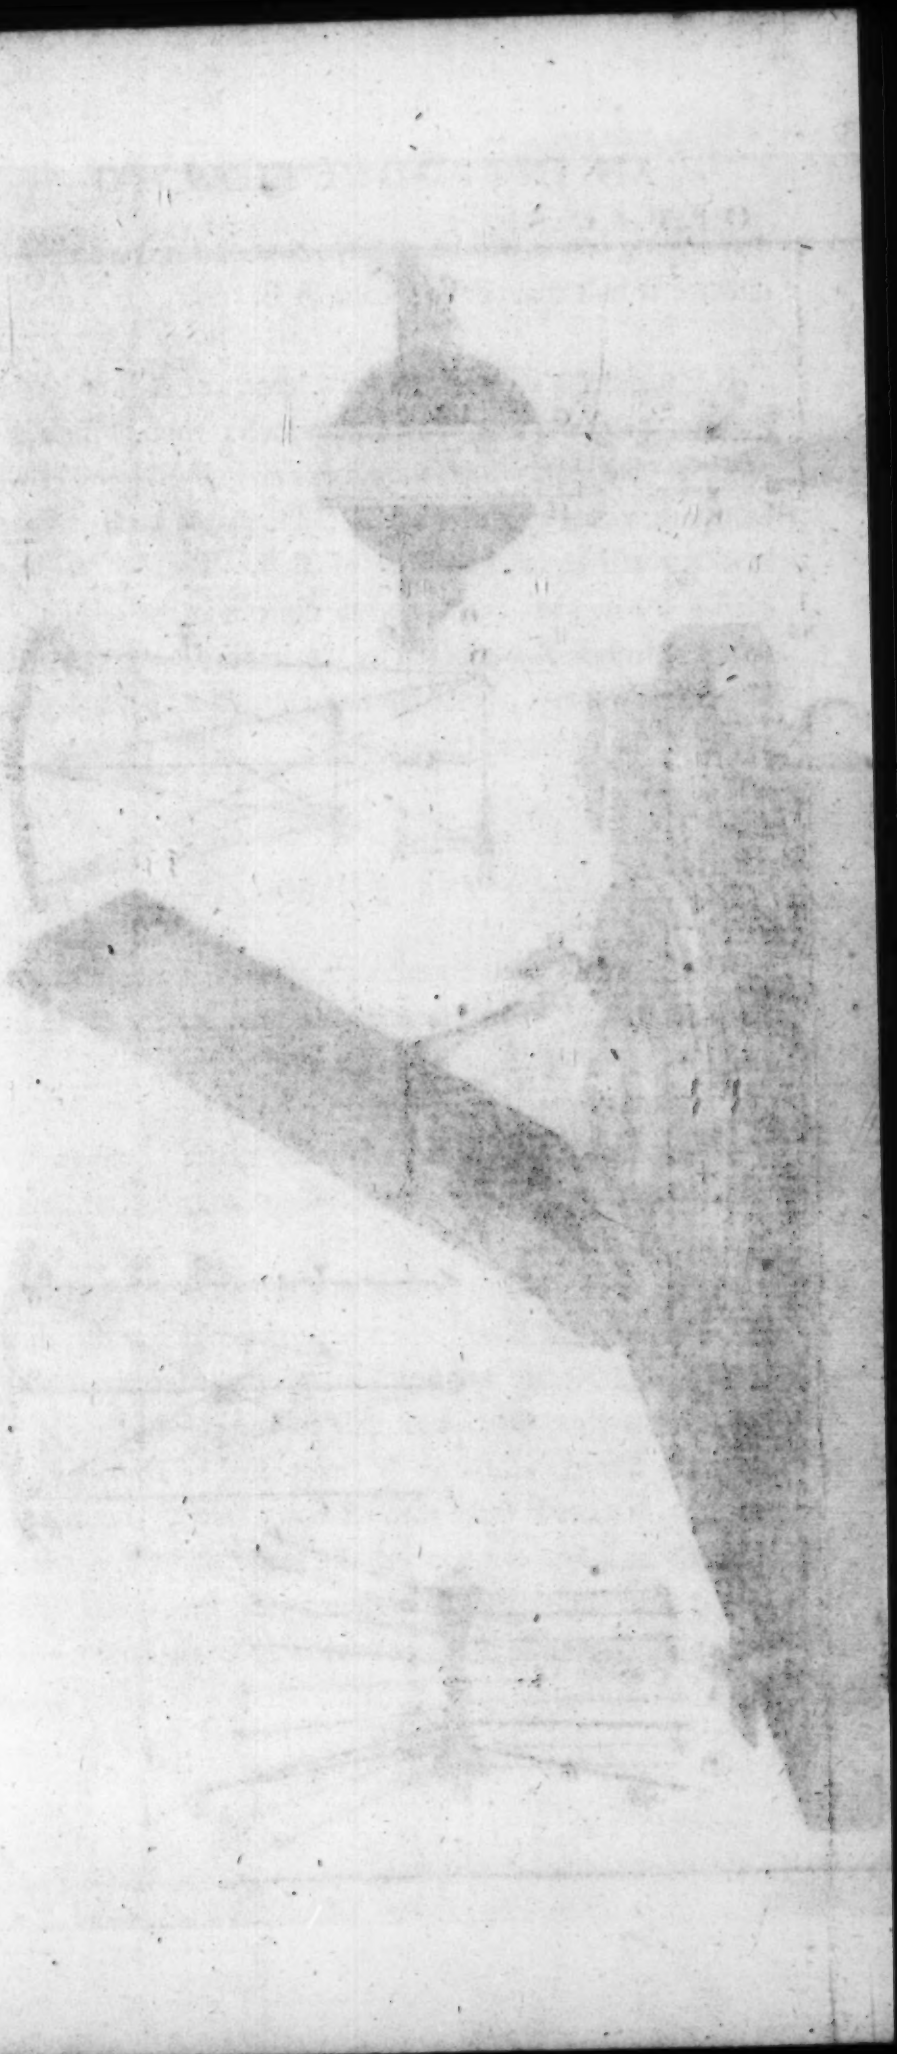

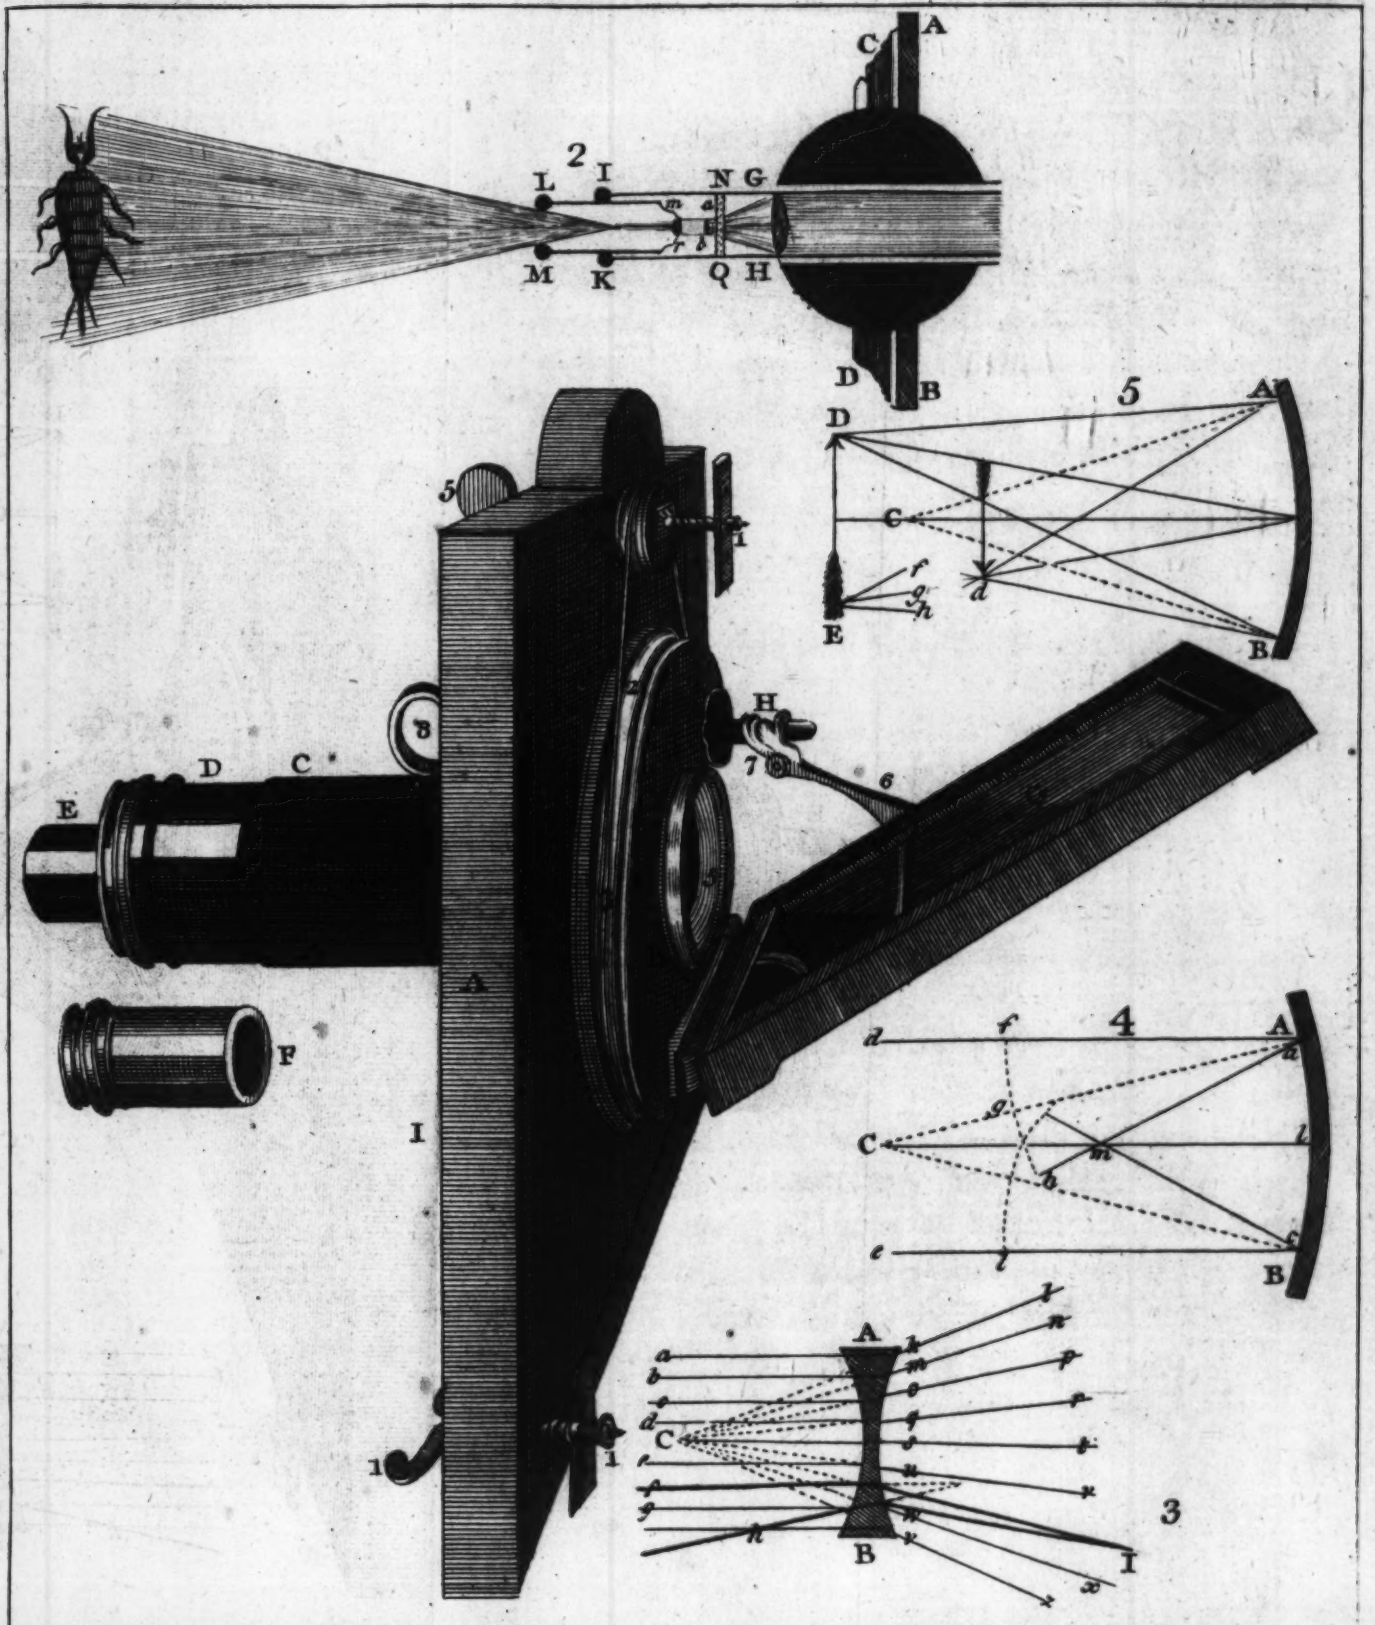
2
L
I
N
G
M
K
Q
H
C
A
D
B
5
E
F
H
7
6
4
3

it is indeed more diſtinct, when not enlarged to above half that ſize.

The apparatus for this purpoſe, as repreſented in the plate annexed, is as follows: Plate XV.

A, a ſquare wooden frame, through which two long ſcrews paſs, and, aſſiſted by a couple of nuts 1. 1. faſten it firmly to a window-ſhutter, wherein a hole is made for its reception; the two nuts being let into the ſhutter, and made faſt thereto. Fig. 1.

A circular hole is made in the middle of this frame, to receive a piece of wood of a circular figure B, whoſe edge, that projects a little beyond the frame, compoſes a ſhallow groove 2, wherein runs a cat-gut 3; which by twiſting round, and then croſſing over a braſs pulley 4, (the handle whereof 5, paſſes through the frame) affords an eaſy motion for turning round the circular piece of wood B, with all the parts thereto affixed.

C is a braſs tube covered with ſeal-ſkin, which ſcrewing into the middle of the circular piece of wood, becomes a caſe for the uncovered braſs tube D, to be drawn backwards or forwards in.

E, a ſmaller tube of about one inch in length, ſcrewed to the end of the larger tube D.

F is another ſhort braſs tube, made to ſlide over the above deſcribed tube E. To the end hereof the microſcope muſt be ſcrewed when we come to uſe it.

5, A convex lens, whoſe focus is about twelve inches; deſigned to collect the ſun's rays, and throw them more ſtrongly upon the object.

G, a looking-glaſs of an oblong figure, ſet in a wooden frame, faſtened by hinges to the circular piece of wood B, and turning about therewith, by means of the above-mentioned cat-gut.

H, a jointed wire, partly braſs and partly iron: the braſs part whereof, which is flat 6, being faſtened to the looking-glaſs, and the iron part, which is round 7, paſſing through the wooden frame, enable the obſerver (by putting it backwards or forwards) to elevate or decline the glaſs according to the ſun's altitude.

1, A braſs ring at the end of the jointed wire, whereby to manage it with greater eaſe.

N. B. The extremities of the cat-gut are faſtened to a braſs pin, by turning of which it may be braced up, if at any time it becomes too ſlack. This pin lying behind could not be ſhown in the picture.

When this microſcope is employed, the room muſt be rendered as dark as poſſible: for on the darkneſs of the room, and the brightneſs of the ſun-ſhine, depend the ſharpneſs and perfection of your image. Then putting the looking-glaſs G through the hole in your window-ſhutter, faſten the ſquare frame A to the ſaid ſhutter by its two ſcrews and nuts, 1. 1.

This

This done, adjuſt your looking-glaſs to the elevation and ſituation of the ſun, by means of the jointed wire H, together with the cat-gut and pulley 3. 4. For the firſt of theſe raiſing or lowering the glaſs, and the other reclining it to either ſide, there reſults a two-fold motion, which may eaſily be ſo managed as to bring the glaſs to a right poſition, that is, to make it reflect the ſun's rays directly through the lens 5, upon the paper ſcreen, and form thereon a ſpot of light exactly round.

Though obtaining a perfect circular ſpot of light upon the ſcreen before you apply the microſcope, is a a certain proof that your looking-glaſs is adjuſted right, yet that proof muſt not always be expected: for the ſun is ſo low in Winter, that if it ſhines in a direct line againſt the window, it cannot then afford a ſpot of light exactly round. But if it be on either ſide of you, a round ſpot may be obtained even in December.

As ſoon as this appears, ſcrew the tube C into the braſs collar provided for it in the middle of your wood-work, taking care not to alter your looking-glaſs; then ſcrewing the magnifier you chuſe to employ to the end of your microſcope, in the uſual manner, take away the lens at the other end thereof, and place a ſlider, containing the object to be examined, between the thin braſs plates, as in the other ways of uſing the microſcope.

Things being thus prepared, ſcrew the body of your microſcope to the ſhort braſs tube F, which ſlip over the ſmall end E of the tube D, and pull out the ſaid tube D leſs or more as your object is capable of enduring the ſun's heat. Dead objects may be brought within about an inch of the

focus

focus of the convex lens 5; but the diſtance muſt be ſhortened for living creatures, or they will ſoon be killed.

If the light falls not exactly right, you may eaſily, by a gentle motion of the jointed wire and pulley, direct it through the axis of the microſcopic lens.

The ſhort tube F, which your microſcope is ſcrewed to, enables you, by ſliding it backwards or forwards on the other tube E, to bring your object to their true focal diſtance; which will be known by the ſharpneſs and clearneſs of their appearance; they may alſo be turned round by the ſame means, without being in the leaſt diſordered.

The magnifiers moſt uſeful in the ſolar microſcope are, in general, the fourth, fifth, or ſixth.

Mention having been often made of a ſcreen to throw the images of objects on, it is proper to inform the reader, that ſuch a ſcreen is uſually compoſed of a ſheet of the largeſt elephant paper, ſtrained on a frame, which ſlides up or down, or turns about at pleaſure on a round wooden pillar, in the manner of ſome fire-ſcreens. Larger ſcreens are likewiſe made ſometimes, with ſeveral ſheets of the ſame paper paſted together on cloth, and let down from the ceiling with a roller, like a large map.

This microſcope is the moſt entertaining of any; and, perhaps, the moſt capable of making diſcoveries in objects that are not too opake; as it ſhews them much larger than can be done any other way. There are alſo ſeveral conveniencies attending it, which no other microſcope can have:

have: for the weakeſt eyes may uſe it without the leaſt ſtraining or fatigue: numbers of people may view any object, together, at the ſame time, and, by pointing to the particular parts thereof, and diſcourſing on what lies before them, may be able better to underſtand one another, and more likely to find out the truth, than when, in other microſcopes, they muſt peep one after another, and perhaps ſee the object neither in the ſame light, nor the ſame poſition. Such too as have no ſkill in drawing, may, by this contrivance, eaſily ſketch out the exact figure of any object they have a mind to preſerve a figure of; ſince they need only faſten a paper upon the ſcreen, and trace it out thereon either with a pen or pencil, as it appears before them.

It is worth their while, who are deſirous to take many draughts in this way, to get a frame, wherein a ſheet of paper may be put in or taken out at pleaſure; for if the paper be ſingle, the image of an object will be ſeen as plainly almoſt on the back as on the other ſide, and by ſtanding behind the ſcreen, the ſhade of the hand will not obſtruct the light in drawing, as it muſt in ſome degree when one ſtands before it.

I muſt obſerve that Dr. Liberkhun's ſolar microſcope had no looking-glaſs belonging to it, and therefore was of uſe a few hours only in a day, when the tube could be placed directly againſt the body of the ſun, and even then not without a good deal of trouble; but by this lucky contrivance of a looking-glaſs, the ſun's rays may be reflected through the tube, whatever its height or ſituation be, provided

vided it ſhines at all upon the window, and that too with much eaſe and advantage.

Of the Nature and Uſe of the Micrometer in viewing ſmall Objects.

MANY and expenſive have been the contrivances for meaſuring ſmall objects, in all their dimenſions, by that inſtrument called a micrometer: I ſhall refer the reader to the ſeveral writers on optics for an account of them, and ſhall here only propoſe one other method, which will come eaſy, and be very ready in practice; the conſtruction of which is a ſufficient explanation of its reaſon and uſe.

The new micrometer is nothing more than a ſtage (on which the objects are placed) moveable by a fine ſcrew which has a hand or ſmall index paſſing over the diviſions of a graduated circle. A fine threaded ſcrew is the eſſential part in all micrometers, of the beſt or moſt perfect kind. This ſcrew was formerly placed in the focus of the eye-glaſs D E, juſt where the image I M is formed; but I found this method of applying it gave ſome trouble in underſtanding and computing the dimenſions taken by it; and therefore I have here applied to the ſtage, or rather to the object itſelf; which being attended with no difficulty, will, I preſume, render the uſe of it more general and pleaſant.

The upper part of the microſcope which contains the glaſs D E has a very fine wire in its focus, and to it any part of the image I M may be applied; or that wire may be applied to any part of the image, by a proper conſtruction

of

of the upper part of the microſcope for that purpoſe. The object being then placed in a proper manner on the ſtage, the ſcrew is to be turned till the image of the object has paſſed its whole length or breadth under the wire, and then the quantity of its dimenſion will be known. Thus, for example:

The number of threads on the ſcrew in one inch is fifty; and the number of diviſions on the circular plate is twenty. Therefore one thread, or one turn of the ſcrew, meaſures one fiftieth part of an inch; and one diviſion of the plate is one twentieth of one fiftieth, that is one thouſandth part of an inch. So that ſuch a micrometer will very exactly meaſure any ſmall object, or its ſmaller parts to the thouſandth part of an inch.

Suppoſe the ſubject were a mite, and it were required to meaſure the length thereof; then I place it in a ſlider, and that ſlider on a ſtage in ſuch a manner, that the mite may move length-wiſe in the direction of a ſcrew; then I move or ſet the wire at right angles thereto, and ſo as to touch the image of the mite at one end, very exactly. This done, I turn the wire till the image has paſſed its whole length under the wire; and having counted the turns, I find them four, and fourteen diviſions of another; the four turns are 4-fiftieths or 80-thouſandths, and the fourteen diviſions are 14 thouſandths; ſo that the whole length of the mite is 94-thouſandths part of an inch, which is almoſt 1-tenth part of an inch.

Again, for a ſecond example: ſuppoſe you meaſure the length of the egg of a mite, and find one turn of the ſcrew, and three diviſions on the plate, carry it completely

under the wire; then one revolution of the ſcrew is 1-fiftieth or 20-thouſandth, and three diviſions are 3-thouſandth, ſo the whole length of the egg is equal to 23-thouſandth of an inch; that is, almoſt one forty-fourth part of an inch; or forty-four ſuch eggs of a mite will, if laid contiguouſly in a right line, be nearly equal to one inch in length.

I may here add, that the micrometer may be eaſily applied to the ſolar microſcope; for let a fine ſtraight line be drawn on the ſcreen, and the end or ſide of the image be placed to touch it, then by turning the ſcrew, it will thereby be meaſured in thouſandth parts of an inch.

How great the pleaſure ariſing to the curious naturaliſts muſt be in the uſe of the micrometer, meaſuring the ſmalleſt objects, may be better conceived than expreſſed, when by this means he acquires an idea of the wonderful diſproportion there is between the magnitudes or dimenſions of the ſmalleſt and largeſt objects of the ſame ſpecies; as between the ſmalleſt of the finny fry and the largeſt whale; an animalcule in vinegar and a rattleſnake thirty or forty feet long. And that the reader may have a clear perception of ſuch a ſurpriſing contraſt in the works of nature, I ſhall here give him a calculation of the comparative magnitude of the egg of a mite, and that of an oſtrich.

Suppoſe the length of an oſtrich's egg to be five inches (ſome are larger); let the length of the egg of a mite be one fiftieth of an inch, and ſome are leſs than that; then the lengths of theſe two eggs will be to each other as five to one fiftieth, or two hundred and fifty to one; then as they are ſimilar bodies, their magnitudes will be as the cubes of

theſe

theſe numbers, viz. as 15625000 to one: that is in words, one egg of an oſtrich is equal to fifteen million ſix hundred and twenty-five thouſand eggs of a mite. And there is great reaſon to believe, that there are eggs of other animalcules in a ſtill greater degree leſs than thoſe of a mite. Indeed, the greateſt ſtretch of the human mind is infinitely inſufficient to explore the amazing and inconceiveable gradations of miniature in every part of nature, even at their very commencement; and nothing but the all-piercing eye of boundleſs intelligence can ſee through a ſeries of ſuch infinitely decreaſing progreſſions.

A Diagram of the Solar Microſcope.

LET A B be a ſection of the window ſhutter of a dark room, C D of the frame containing a ſcioptric ball E F; in the forepart whereof is ſcrewed the tube G I K H, at one end of which is a lens G H, which, by converging the ſun-beams into a narrow compaſs, does ſtrongly enlighten the ſmall object a b, placed on a ſlip of glaſs, or otherwiſe, in the part of the tube N Q, where a ſlit is made on each ſide for that purpoſe. Within this tube there ſlides another, L m r M, which contains a ſmall magnifying lens m r. Plate XIV. Fig. 2.

By moving the exterior tube I G H K one way, and the other, the glaſs G H will be brought to receive the rays of the ſun directly, and will therefore moſt intenſely illuminate the object a b. The other tube L M, being ſlid backwards and forwards, will adjuſt the diſtance of the ſmall lens m r, ſo that the image of the object a b ſhall be made very diſtinct, on the oppoſite ſide of the room at O P; and

the magnitude of the image will be to that of the object, as the diſtance from the lens m r is to the diſtance of the object from it; as is evident from the figure.

Of TELESCOPES.

BEFORE we enter upon the deſcription of teleſcopes, it will be proper to ſhew how the rays of light are affected by paſſing through concave glaſſes, and alſo by falling upon concave mirrours.

Fig. 3. When parallel rays, as a b c d e f g h, paſs directly through a glaſs A B, which is equally concave on both ſides, they will diverge after paſſing through the glaſs, as if they had come from a radiant point C, in the center of the glaſs's concavity; which point is called the negative or virtual focus of the glaſs. Thus the ray a, after paſſing through the glaſs A B, will go on in the direction k l, as if it had proceeded from the point C, and no glaſs being in the way. The ray b will go on in the direction m n; the ray c in the direction o p, &c. The ray C, that falls directly upon the middle of the glaſs, ſuffers no refraction in paſſing through it; but goes on in the ſame rectilineal direction, as if no glaſs had been in its way.

If the glaſs had been concave only on one ſide, and the other ſide quite plane, the rays would have diverged, after paſſing through it, as if they had come from a radiant point at double the diſtance of C from the glaſs; that is, as if the radiant had been at the diſtance of a whole diameter of the glaſs's concavity.

If

If rays come more converging to ſuch a glaſs than parallel rays diverge after paſſing through it, they will continue to converge after paſſing through it; but will not meet ſo ſoon as if no glaſs had been in the way; and will incline towards the ſame ſide to which they would have diverged, if they had come parallel to the glaſs. Thus the rays f and h going in a converging ſtate towards the edge of the glaſs at B, and converging more in their way to it than the parallel rays diverge after paſſing through it, they will go on converging after they paſs through it, though in a leſs degree than they did before, and will meet at l: but if no glaſs had been in their way, they would have met at i.

When the parallel rays, as d f a, C m b e l c, fall upon a concave mirrour A B (which is not tranſparent, but has only the ſurface A b B of a clear poliſh) they will be reflected back from that mirrour, and meet in a point m, at half the diſtance of the ſurface of the mirrour from C, the center of its concavity: for they will be reflected at as great an angle from the perpendicular to the ſurface of the mirrour as they fell upon it, with regard to that perpendicular; but on the other ſide thereof. Thus, let C be the center of concavity of the mirrour A b B, and let the parallel rays d f a, C m b, and e l c, fall upon it at the points a b and c. Draw the lines C i a, C m b, and C h c from the center C to theſe points; and all theſe lines will be perpendicular to the ſurface of the mirrour, becauſe they proceed thereto like ſo many radii or ſpokes from its center. Make the angle C A h equal to the angle d a C, and draw the line a m n, which will be the direction of the ray d f a, after it is reflected from the point of the mirrour: ſo that the angle of incidence d a C, is equal Fig. 4.

to

to the angle of reflection C a h; the rays making equal angles with the perpendicular C i a on its oppoſite ſides.

Draw alſo the perpendicular C h c to the point c, where the ray e l c touches the mirrour; and, having made the angle C c i, equal to the angle C c e, draw the line c m i, which will be the courſe of the ray e l c, after it is reflected from the mirrour.

The ray C m b paſſes through the center of concavity of the mirrour, and falls upon it at b, the perpendicular to it; and is therefore reflected back from it in the ſame line b m C.

All theſe reflected rays meet in the point m; and in that point the image of the body which emits the parallel rays d a, C d, and e c will be formed: which point is diſtant from the mirrour equal to half the radius b m C of its concavity.

The rays which proceed from any celeſtial object, may be eſteemed parallel at the earth; and therefore, the images of that object will be formed at m, when the reflecting ſurface of the concave mirrour is turned directly towards the object. Hence the focus of the parallel rays is not in the center of the mirrour's concavity, but half way between the mirrour and that center.

The rays which proceed from any remote terreſtrial object, are nearly parallel at the mirrour: not ſtrictly ſo but come diverging to it in ſeparate pencils, or, as it were, bundles of rays, from each point of the ſide of the object next the mirrour; therefore they will not be converged to a point

a point at the diſtance of half the radius of the mirrour's concavity from its reflecting ſurface; but in ſeparate points at a little greater diſtance from the mirrour. And the nearer the object is to the mirrour, the farther theſe points will be from it; and an inverted image of the object will be formed in them, which will ſeem to hang pendant in the air: and will be ſeen by an eye placed beyond it (with regard to the mirrour) in all reſpects like the object, and as diſtinct as the object itſelf.

Let A c B be the reflecting ſurface of a mirrour, whoſe center of concavity is at C; and let the upright object D E be placed beyond the center C, and ſend out a conical pencil of diverging rays from its upper extremity D, to every point of the concave ſurface of the mirrour A c B. But to avoid confuſion, we only draw three rays of that pencil; as D A, D c, D B. Fig. 3.

From the center of concavity C, draw the three right lines C A, C c, C B, touching the mirrour in the ſame points where the aforeſaid touch it, and all theſe lines will be perpendicular to the ſurface of the mirrour. Make the angle C A d equal to the angle D A C, and draw the right line A d for the courſe of the reflected ray D A: make the angle C c d equal to the angle D c C, and draw the right line c d for the courſe of the reflected ray D d: make alſo the angle C B d equal to the angle D B C, and draw the right light line B d for the courſe of the reflected ray D B. All theſe reflected rays will meet in point d, where they will form the extremity d of the inverted image e d, ſimilar to the extremity D of the upright object D E.

If

If the pencils of rays E f, E g, E h, be alſo continued to the mirrour, and their angles of reflection from it be made equal to their angles of incidence upon it, as in the former pencil from D, they will all meet at the point e by reflection, and form the extremity e of the image e d, ſimilar to the extremity E of the object D E.

As each intermediate point of the object between D and E, ſends out a pencil of rays in like manner to every part of the mirrour, the rays of each pencil will be reflected back from it, and meet in all the intermediate points between the extremities e and d of the image; and ſo the whole image will be formed not at i, half the diſtance of the mirrour from its center of concavity C, but at a greater diſtance between i and the object D E; and the image will be inverted with reſpect to the object.

This being well underſtood, the reader will eaſily ſee how the image is formed by the large concave mirrour of the reflecting teleſcope, when he comes to the deſcription of that inſtrument.

When the object is more remote from the mirrour than its center of concavity C, the image will be leſs than the object, and between the object and the mirrour; when the object is nearer than the center of concavity, the image will be more remote and bigger than the object: thus, if D E be the object, e d will be its image; for as the object recedes from the mirrour, the image approaches nearer to it; and as the object approaches nearer to the mirrour, the image recedes farther from it; on account of the leſſer or greater divergency of the pencils of rays which proceed from the object; for the leſs they diverge, the

ſooner

ſooner they are converged to points by reflection; and the more they diverge, the farther they muſt be reflected before they meet.

If the radius of the mirrour's concavity and the diſtance of the object from it be known, the diſtance of the image from the mirrour is found by this rule: Divide the product of the diſtance and radius by double the diſtance made leſs by the radius, and the quotient is the diſtance required.

If the object be in the center of the mirrour's concavity, the image and object will be coincident, and equal in bulk.

If a man places himſelf directly before a large concave mirrour, but farther from it than its center of concavity, he will ſee an inverted image of himſelf in the air, between him and the mirrour, of a leſs ſize than himſelf. And if he holds out his hand towards the mirrour, the hand of the image will come out towards his hand, and coincide with it, of an equal bulk, when his hand is in the center of concavity; and he will imagine he may ſhake hands with his image. If he reaches his hand farther, the hand of the image will paſs by his hand, and come between his hand and his body: and if he moves his hand towards either ſide, the hand of the image will move towards the other: ſo that whatever way the object moves, the image will move the contrary way.


All the while a bye-ſtander will ſee nothing of the image, becauſe none of the reflected rays that form it enter his eyes.

If a fire be made in a large room, and a ſmooth mahogany table be placed at a good diſtance near the wall, before a large concave mirrour, ſo placed that the light of the fire may be reflected from the mirrour to its focus upon the table; if a perſon ſtands by the table, he will ſee nothing upon it but a longiſh beam of light: but if he ſtands at a diſtance towards the fire, not directly between the fire and mirrour, he will ſee an image of the fire upon the table, large and erect. And if another perſon, who knows nothing of this matter before hand, ſhould chance to come into the room, and ſhould look from the fire towards the table, he would be ſtartled at the appearance; for the table would ſeem to be on fire, and by being near the wainſcot, to endanger the whole houſe. In this experiment there ſhould be no light in the room but what proceeds from the fire; and the mirrour ought to be at leaſt fifteen inches in diameter.

If the firſt be darkened by a ſcreen, and a large candle be placed at the back of the ſcreen; a perſon ſtanding by the candle will ſee the appearance of a fine large ſtar, or rather planet, upon the table, as bright as Venus or Jupiter. And if a ſmall wax taper (whoſe flame is much leſs than the flame of a candle) be placed near the candle, a ſatellite to the planet will appear on the table: and if the taper be moved round the candle, the ſatellite will go round the planet.

The Refracting Teleſcope.

IN a refracting teleſcope, the glaſs which is neareſt the object in viewing it, is called the object glaſs; and that which

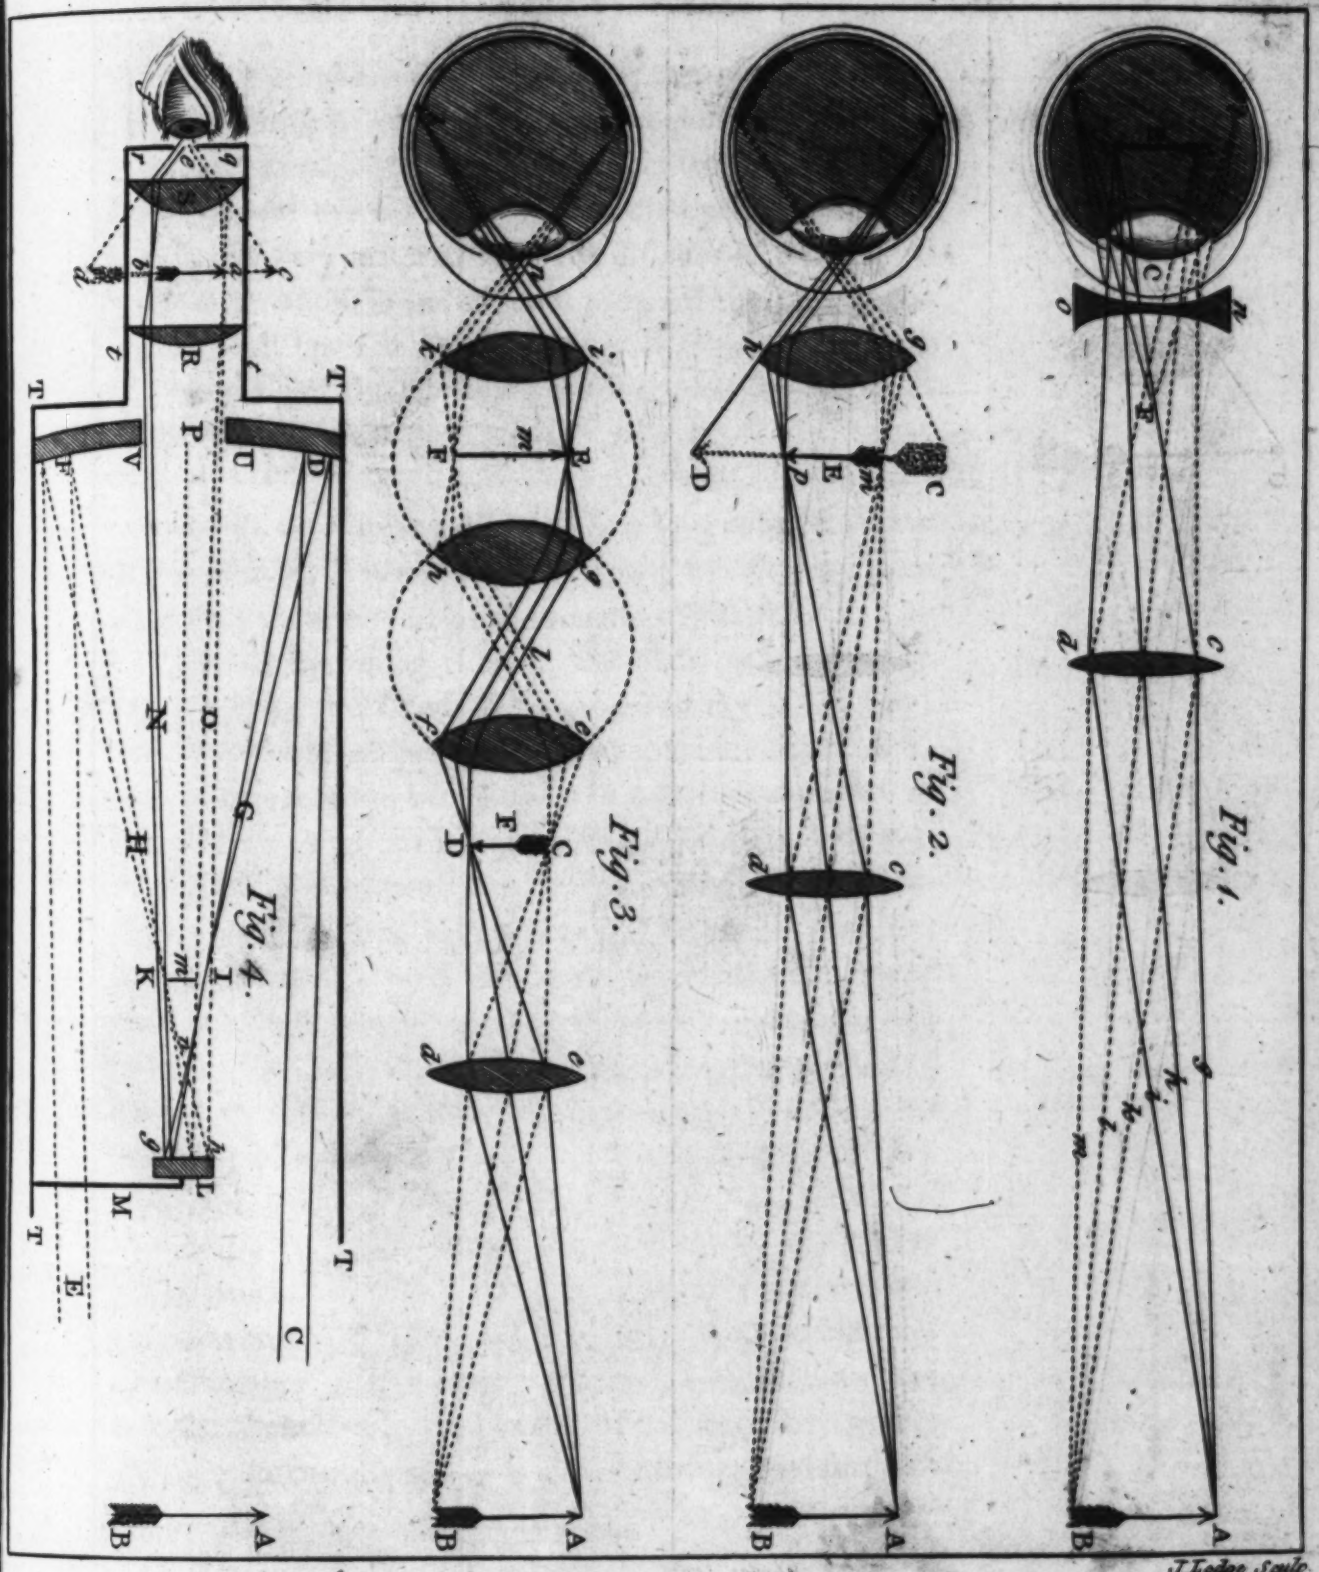
Fig. 1.
Fig. 2.
Fig. 3.
Fig. 4.
J. Lodge Sculp.


BRITISH MUSEUM
15
61
NOV

which is neareſt the eye is called the eye-glaſs. The object-glaſs muſt be convex, but the eye-glaſs may be either convex or concave: and generally, in looking through a teleſcope, the eye is in the focus of the eye-glaſs, though that is not very material: for the diſtance of the eye, as to diſtinct viſion, is indifferent, provided the rays of the pencils fall upon it parallel: only, the nearer the eye is to the end of the teleſcope, the larger the ſcope or area of the field of view.

Let c d be a convex glaſs fixed in a long tube, and have its focus at E. Then a pencil of rays g h i, flowing from the upper extremity A of the remote object A B, will be ſo refracted by paſſing through the glaſs, as to converge and meet in point f; whilſt the pencil of rays k l m flowing from the lower extremity B, of the ſame object A B, and paſſing through the glaſs, will converge and meet in the point e: and the images of the point A and B, will be formed in the points f and e. And as all the intermediate points of the object between A and B ſend out pencils of rays in the ſame manner, a ſufficient number of theſe pencils will paſs through the object-glaſs c d, and converge to as many intermediate points between e and f; and ſo will form the whole inverted image e E f, of the diſtinct object. But becauſe this image is ſmall, a concave glaſs n o is ſo placed in the end of the tube next the eye, that its virtual focus may be at F. And as the rays of the pencils paſs converging through the concave glaſs, but converge leſs after paſſing through it than before they go on further, as to b and a, before they meet; and the pencils themſelves being made to diverge by paſſing through the concave glaſs, they enter the eye, and form the Plate XVI. Fig. 1.

large picture a b upon the retina, whereon it is magnified under the angle b F a.

But this teleſcope has one inconveniency which renders it unfit for moſt purpoſes; which is, that the pencils of rays being made to diverge by paſſing through the concave glaſs n o, very few of them can enter the pupil of the eye; and therefore the field of view is but very ſmall, as is evident by the figure. For none of the pencils which flow either from the top or bottom of the object A B can enter the pupil of the eye at C, but are all ſtopt by falling upon the iris above and below the pupil: and therefore only the middle part of the object can be ſeen when the teleſcope lies directly towards it, by means of thoſe rays which proceed from the middle of the object. So that to ſee the whole of it, the teleſcope muſt be moved upwards and downwards, unleſs the object be very remote; and then it is never ſeen diſtinctly.

Fig. 2. This inconvenience is remedied by ſubſtituting a convex eye-glaſs, as g h, in place of the concave one; and fixing it ſo in the tube that its focus may be coincident with the focus of the object glaſs c d; as at E. For then the rays of the pencils flowing from the object A B, and paſſing through the object glaſs c d, will meet in its focus, and form the inverted image m E p; and as the image is formed in the focus of the eye-glaſs g h, the rays of each pencil will be parallel, after paſſing through that glaſs; but the pencils themſelves will croſs in its focus, on the other ſide, as at e; and the pupil of the eye being in this focus, the image will be viewed through the glaſs, under the angle g e h; and being at E, it will appear magnified, ſo as to fill the whole ſpace C m e p D.

But,

But, as this teleſcope inverts the image with reſpect to the object, it gives an unpleaſant view of terreſtrial objects; and is only fit for viewing the heavenly bodies, in which we regard not their poſition, becauſe their being inverted does not appear, on account of their being round. But whatever way the object ſeems to move, this teleſcope muſt be moved the contrary way, in order to keep ſight of it; for, ſince the object is inverted, its motion will be ſo too.

The magnifying power of this teleſcope is, as the focal diſtance of the object-glaſs to the focal diſtance of the eye-glaſs. Therefore, if the former be divided by the latter, the quotient will expreſs the magnifying power.

When we ſpeak of magnifying by a teleſcope or microſcope, it is only meant with regard to the diameter, not to the area or ſolidity of the object. But as the inſtrument magnifies the vertical diameter as much as it does the horizontal, it is eaſy to find how much the whole viſible area or ſurface is magnified: for, if the diameters be multiplied into one another, the product will expreſs the magnification of the whole viſible area. Thus, ſuppoſe the focal diſtance of the object-glaſs be ten times as great as the focal diſtance of the eye-glaſs; then, the object will be magnified ten times, both in length and breadth: and ten multiplied by ten produces one hundred; which ſhews that the area of the object will appear one hundred times as big when ſeen through ſuch a teleſcope, as it does to the bare eye.

Hence it appears, that if the focal diſtance of the eye-glaſs were equal to the focal diſtance of the object-glaſs,

glaſs, the magnifying power of the teleſcope would be nothing.

This teleſcope may be made to magnify in any given degree, provided it be of a ſufficient length. For the greater the focal diſtance of the object-glaſs, the leſs may be the focal diſtance of the eye-glaſs, though not directly in proportion. Thus, an object-glaſs of ten feet focal diſtance, will admit of an eye-glaſs whoſe focal diſtance is little more than two inches and a half; which will magnify near forty-eight times; but an object-glaſs of one hundred feet focus, will require an eye-glaſs ſomewhat more than ſix inches; and will therefore magnify almoſt two hundred times.

Fig. 3. A teleſcope for viewing terreſtrial objects, ſhould be ſo conſtructed as to ſhew them in their natural poſture. And this is done by one object-glaſs c d, and three eye-glaſſes e f, g h, i k, ſo placed, that the diſtance between any two, which are neareſt to each other, may be equal to the ſum of their focal diſtances; as in the figure where the focus of the glaſſes c d and e f meet at F, thoſe of the glaſſes e f and g h, meet at l, and of g h and i k, at m; the eye being at n, in or near the focus of the eye-glaſs i k, on the other ſide Then it is plain that theſe pencils of rays which flow from the object A B, and paſs through the object-glaſs c d, will meet and form an inverted image C F D in the focus of that glaſs; and the image being alſo in the focus of the glaſs e f, the rays of the pencils will become parallel, after paſſing through that glaſs, and croſs at l, in the focus of the glaſs e f; from whence they paſs on to the next glaſs g h, and by going through it they are converged to the points in its other focus, where they form

form an erect image E m F, of the object A B; and as this image is alſo in the focus of the eye-glaſs i k, and the eye on the oppoſite ſide of the ſame glaſs; the image is viewed through the eye-glaſs in this teleſcope, in the ſame manner as through the eye-glaſs in the former one; only in a contrary poſition; that is, in the ſame poſition with the object.

The three glaſſes next the eye have all their focal diſtances equal; and the magnifying power of this teleſcope is found the ſame way as that of the laſt above; viz. by dividing the focal diſtance of the object-glaſs c d by the focal diſtance of the eye-glaſs i k, or g h, or e f, ſince all theſe three are equal.

Why the object appears coloured when ſeen through a teleſcope.

When the rays of light are ſeparated by refraction, they become coloured, and if they be united again, they will be a perfect white. But thoſe rays which paſs through a convex glaſs, near its edges, are more unequally refracted than thoſe nearer the middle of the glaſs. And when the rays of any pencil are unequally refracted by the glaſs, they do not all meet again in one and the ſame point, but in ſeparate points; which makes the object indiſtinct, and coloured about the edges. The remedy is, to have a plate with a ſmall round hole in its middle, fixed in the tube at m, parallel to the glaſſes. For the wandering rays about the middle of the glaſſes will be ſtopt by the plate from coming to the eye; and none admitted but thoſe which come through the middle of the glaſs, or at leaſt at a good diſtance from its edges, and paſs through a hole in the middle of the plate. But this circumſcribes the image, and leſſens the field of view, which ſhould be much larger if the plate could be diſpenſed with.

The

The Binocular, or Double Teleſcope.

BESIDES the teleſcopes deſcribed before, there is alſo one called a binocular, or double teleſcope. This is no more than two equal teleſcopes ſet in a frame, parallel to one another; and theſe may be ſet at a proper diſtance from one another, by the help of ſcrews; and that diſtance is to be the ſame as the diſtance of the two pupils of the eyes. When that is adjuſted, a perſon is to look through them both at once; through one with each eye, to any object; which will then be ſeen by both eyes, and appear far brighter then through a ſingle teleſcope.

All teleſcopes in general repreſent all terreſtrial objects to be nearer hand, but not larger; and this nearneſs, vicinity, or ſeeming approach of the object, is as the magnifying power of the teleſcope. Thus looking at a man one hundred yards off, with a teleſcope that magnifies one hundred times; the man will appear to be no bigger, but will ſeem only to be a yard off; and the like of other objects ſituated on the earth.

The magnifying power of a teleſcope will be found if you make two equal circles of paper of an inch diameter or more, and fix one of them upon a wall one hundred or two hundred yards diſtant; and the other at a ſmall diſtance, in a line with the firſt. Then look at the further circle through the teleſcope with one eye, and at the near circle with the other eye naked. Move the near circle (or elſe the teleſcope) back and forward, till the two circles appear equal, or coincide. Then meaſure the two diſtances

tances, from the eye-glaſs of the teleſcope to the two circles; then divide the greater diſtance by the leſſer, and you have the magnifying power of the teleſcope.

To try the Goodneſs of an Object Glaſs.

THERE is no better way for trying the goodneſs of an object glaſs than putting it in a tube, and trying it with ſeveral ſmall eye-glaſſes, by looking at ſeveral diſtant objects, and particularly at the title-page of a book; for that glaſs which repreſents objects the moſt bright and diſtinct, and bears the greateſt aperture, and the ſhorteſt eye-glaſs, without colouring or dimneſs, is the beſt glaſs.

If ſeveral teleſcopes of the ſame length be compared together, thoſe are the beſt with which you can read the ſame print at the greateſt diſtance. And this may be a rule for thoſe that buy teleſcopes, by which they may know how to chooſe the beſt.

There are four principal things in a teleſcope to be conſidered: 1. Magnifying power. 2. Diſtinctneſs. 3. Brightneſs. 4. The viſible angle, or linear view it takes in.

A TABLE *of the Focal Diſtances, Apertures, and magnifying Powers of Refracting Teleſcopes.*

Foc. obj. glaſs	aper. obj. glaſs	Foc. eye glaſs	mag. power.
Feet.	Inch.	Inch.	
1	.54	.60	20
2	.76	.83	28
3	.94	1.03	34
4	1.08	1.19	40
5	1.22	1.34	44
6	1.32	1.45	49
7	1.43	1.57	52
8	1.53	1.68	56
9	1.62	1.78	60
10	1.71	1.88	64
13	1.95	2.14	73
15	2.09	2.30	78
20	2.42	2.66	90
25	2.70	2.97	101
30	2.96	3.25	110
35	3.20	3.52	119
40	3.41	3.75	128
45	3.62	3.98	135
50	3.82	4.20	143
55	4.00	4.40	150
60	4.18	4.60	156
70	4.52	4.97	169
80	4.83	5.31	181
90	5.13	5.64	192
100	5.40	5.94	202
120	5.91	6.50	222
140	6.39	7.03	239
160	6.83	7.51	255
180	7.25	7.97	271
200	7.64	8.40	284

The Reflecting Teleſcope.

THE great inconvenience attending the management of long teleſcopes of the refracting kind, has brought them much into diſuſe ever ſince the reflecting teleſcope was invented; for one of this ſort, ſix feet in length, magnifies as much as one of the other at an hundred. It was invented by Sir Iſaac Newton; but has received conſiderable improvements ſince his time; and is now generally conſtructed in the following manner, which was firſt propoſed by Dr. Gregory.

At the bottom of the great tube T T T T, is placed the large concave mirror DUVF, whoſe principal focus is at M; and in its middle is a round hole P, oppoſite to which is placed the ſmall mirror L, concave toward the great one; and ſo fixed to a ſtrong wire, M, that it may be moved farther from the great mirror, or nearer to it, by means of a long ſcrew on the outſide of the tube, keeping its axis ſtill in the ſame line P m n with that of the great one. Now, ſince in viewing a very remote object, we can ſcarce ſee a point of it but what is at leaſt as broad as the great mirror, we may conſider the rays of each pencil, which flow from every point of the object, to be parallel to each other, and to cover the whole reflecting ſurface D U V F. But, to avoid confuſion in the figure, we ſhall only draw two rays of a pencil flowing from each extremity of the object into the great tube, and trace their progreſs, through all their reflections and refractions, to the eye f, at the end of the ſmall tube t t, which is joined to the great one. Fig. 4.

Let us then ſuppoſe the object A B to be at ſuch a diſtance, that the rays C may flow from its lower extremity B, and the rays E from its upper extremity A. Then the rays C falling parallel upon the great mirror at D, will be thence reflected, converging in the direction D G; and by croſſing at I in the principal focus of the mirror, they will form the upper extremity I of the inverted image I K, ſimilar to the lower extremity B of the object A B: and paſſing on to the concave mirror L (whoſe focus is at n) they will fall upon it at g, and be thence reflected converging, in the direction g N, becauſe g m is longer than g n; and paſſing through the hole P in the large mirror, they would meet ſomewhere about r, and form the lower extremity d of the erect image a d, ſimilar to the lower extremity B of the object A B. But by paſſing through the plano-convex-glaſs R in their way, they form that extremity of the image at b. In like manner the rays E, which come from the top of the object A B, and fall parallel upon the great mirror at F, are thence reflected converging to its focus, where they form the lower extremity K of the inverted image I K, ſimilar to the upper extremity A of the object A B; and thence paſſing on to the ſmall mirror L, and falling upon it at h, they are thence reflected in the converging ſtate h O; and going on thro' the hole P of the great mirror, they would meet ſomewhere about q, and form there the upper extremity a of the erect image a d, ſimilar to the upper extremity A of the object A B: but by paſſing through the convex-glaſs R in their way, they meet and croſs ſooner, as at a, where that point of the erect image is formed. The like being underſtood of all thoſe rays which flow from the intermediate points of the object, between A and B, and enter the tube T T; all the intermediate points of the image between a and b will be formed; and the rays

paſſing

paſſing on from the image through the eye-glaſs S, and through a ſmall hole e in the end of the leſſer tube t t, they enter the eye f, which ſees the image a d (by means of the eye-glaſs) under the large angle c e d, and magnified in length, under that angle from c to d.

In the beſt reflecting teleſcopes, the focus of the ſmall mirror is never coincident with the focus m of the great one, where the firſt image I K is formed but a little beyond it (with reſpect to the eye) as at n: the conſequence of which is, that the rays of the pencils will not be parallel after reflection from the ſmall mirror, but converge ſo as to meet in points about q, e, r; where they will form a larger upright image than a d, if the glaſs R was not in their way: and this image might be viewed by means of a ſingle eye-glaſs properly placed between the image and the eye; but then the field of view would be leſs, and conſequently not ſo pleaſant; for which reaſon the glaſs R is ſtill retained, to enlarge the ſcope or area of the field.

To find the magnifying power of this teleſcope, multiply the focal diſtance of the great mirror by the diſtance of the ſmall mirror from the image next the eye; and multiply the focal diſtance of the ſmall mirror by the focal diſtance of the eye-glaſs; then divide the product of the former multiplication by the product of the latter, and the quotient will expreſs the magnifying power.

I ſhall here ſet down the dimenſions of one of Mr. Short's reflecting teleſcopes, as deſcribed in Dr. Smith's optics.

The focal diſtance of the great mirror 9.6 inches, its breadth 2.3; the focal diſtance of the ſmall mirror 1.5,

its

its breadth 0.6: the breadth of the hole in the great mirror 0.5; the diſtance between the ſmall mirror and the next eye-glaſs 14.2; the diſtance between the two eye-glaſſes 2.4; the focal diſtance of the eye-glaſs next the metal 3.8; and the focal diſtance of the eye-glaſs next the eye 1.1.

One great advantage of the reflecting teleſcope is, that it will admit of an eye-glaſs of a much ſhorter focal diſtance than a refracting teleſcope will; and conſequently it will magnify ſo much the more; for the rays are not coloured by reflection from a concave mirror, if it be ground to a true figure, as they are by paſſing through a convex-glaſs, let it be ground ever ſo true.

The adjuſting ſcrew on the outſide of the great tube fits this teleſcope to all ſorts of eyes, by bringing the ſmall mirror either nearer to the eye, or removing it farther; by which means the rays are made to diverge a little for ſhort-ſighted eyes, or to converge for thoſe of a long ſight.

The nearer an object is to the teleſcope, the more its pencils of rays will diverge before they fall upon the great mirror, and therefore they will be the longer of meeting in points after reflection; ſo that the firſt image I K will be formed at a greater diſtance from the large mirror, when the object is near the teleſcope, than when very remote. But as this image muſt be formed farther from the ſmall mirror than its principal focus n, this mirror muſt be always ſet at a greater diſtance from the large one in viewing near objects, than in viewing remote ones: and this is done by turning the ſcrew on the outſide of the tube, until the ſmall mirror be ſo adjuſted, that the object (or rather its image) appears perfect.

In

In looking through any teleſcope towards an object, we never ſee the object itſelf, but only that image of it which is formed next the eye in the teleſcope: for, if a man holds his finger or a ſtick between his bare eye and an object, it will hide part, if not the whole, of the object from his view. But if he ties a ſtick acroſs the mouth of a teleſcope, before the object-glaſs, it will hide no part of the imaginary object he ſaw through the teleſcope before, unleſs it covers the whole mouth of the tube: for all the effect will be to make the object appear dimmer, becauſe it intercepts part of the rays. Whereas, if he puts only a piece of wire acroſs the inſide of the tube, between the eye-glaſs and his eye, it will hide part of the object which he thinks he ſees: which proves that he ſees not the real object, but its image. This is alſo confirmed by means of the ſmall mirror L, in the reflecting teleſcope, which is made of opake metal, and ſtands directly between the eye and the object towards which the teleſcope is turned; and will hide the whole object from the eye at e, if the two glaſſes R and S are taken out of the tube.

A Table

A TABLE *of the Apertures, Powers, &c. of Teleſcopes of the Newtonian Conſtruction, in which the Figure of the great Metal is ſuppoſed to be truly Spherical.*

Focal diſtance of the Concave Metal.	Aperture of Concave Metal.	Sir Iſaac Newton's Numbers	Focal diſtance of ſingle eye glaſs.	Magnifying power.
Feet.	In. dec.		In. dec.	
½	0.86	100	0.167	36
1	1.44	168	0.199	62
2	2.45	283	0.236	102
3	3.31	383	0.261	138
4	4.10	476	0.281	171
5	4.85	562	0.297	202
6	5.57	645	0.311	232
7	6.24	———	0.323	260
8	6.89	800	0.334	287
9	7.54	———	0.344	314
10	8.16	946	0.353	340
11	8.76	———	0.362	365
12	9.36	1084	0.367	390
13	9.94	———	0.377	414
14	10.49	———	0.384	437
15	11.04	———	0.391	460
16	11.59	1345	0.397	483
17	12.14	———	0.403	506
18	12.67	———	0.409	528
19	13.20	———	0.414	550
20	13.71	1591	0.420	571
21	14.23	———	0.425	593
22	14.73	———	0.430	614
23	15.21	———	0.435	635
24	15.73	1824	0.439	656

As

AS teleſcopes of Sir Iſaac Newton's conſtruction are now found (particularly by the late exquiſite obſervations of Mr. Herſchell) to perform moſt excellently in the *minutiæ* of aſtronomy, eſpecially if ſmall apertures and long foci are made uſe of, I have added the foregoing table, chiefly taken from Dr. Smith's Optics, and have continued it from 17 to 24 feet focal diſtance of the great mirror: I have alſo annexed to it Sir Iſaac Newton's numbers, by means of which the apertures of reflecting teleſcopes of any conſtruction may be eaſily computed. See Appendix to Gregory's Optics.

It may be neceſſary to mention that the preceding table was conſtructed by uſing the dimenſions of the middle aperture and power of Mr. Hadley's excellent *Newtonian* teleſcope as a ſtandard; viz. the focal diſtance of great mirror 62 ½ inches; aperture of concave metal 5 inches, and power 208 times. Mr. Herſchell, chiefly makes uſe of a Newtonian reflector, the focal diſtance of whoſe great mirror is 7 feet, its aperture 6.25 inches, and powers 227 and 460 times; though ſometimes he uſes a power of 6450 for the fixed ſtars; but he is now conſtructing a teleſcope which will infinitely exceed the former.


If the metals of a *Newtonian* teleſcope are worked as exquiſitely as thoſe in Mr. Herſchell's 7 feet reflector, the higheſt power that ſuch a teleſcope ſhould bear with perfect diſtinctneſs will be given by multiplying the diameter of the great ſpeculum by 74; and the focal diſtance of the ſingle eye-glaſs may be found by dividing the focal diſtance of the great mirror by the magnifying power; thus 6.25 multiplied by 74 is 462, the mag-


nifying power; and 7 multiplied by 12 and divided by 462 is 0.182 of an inch, the focal distance of the single eye-glass required.—To this I shall add


A TABLE *of the Dimensions and magnifying Powers of* Gregorian *Reflecting Telescopes, as constructed by* Mr. Short, *computed by* Dr. Smith, *from the Dimensions of one given before. See Page* 261.


Focal distance of the great mirror.	Breadth of the great mirror.	Focus of the little speculum.	Breadth of the hole in the great speculum.	Distance between the little speculum and the first eye-glass.	Focal distance of the glass next the metals.	Focal distance of the glass next the eye.	Distance between the two glasses.	Magnifying Power.
In. dec.	In. dec.	In. dec.	In. dec.	In. dec.	In. dec.	In. dec.	In. dec.	
5.65	1.54	1.10	.31	8.54	2.44	.81	1.68	39
9.60	2.30	1.50	.39	14.61	3.13	1.04	2.08	60
15.50	3.30	2.14	.50	23.81	3.94	1.31	2.63	86
36.00	6.26	3.43	.65	41.16	5.12	1.70	3.41	165
60.00	9.21	5.00	.85	68.17	6.43	2.4	4.28	241



BRITISH MUSEUM
15
61
NOV

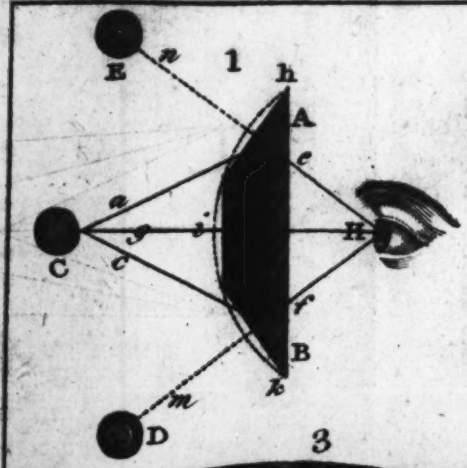

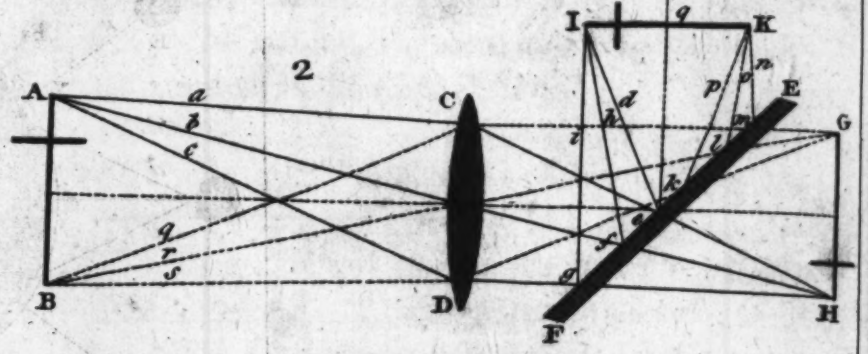

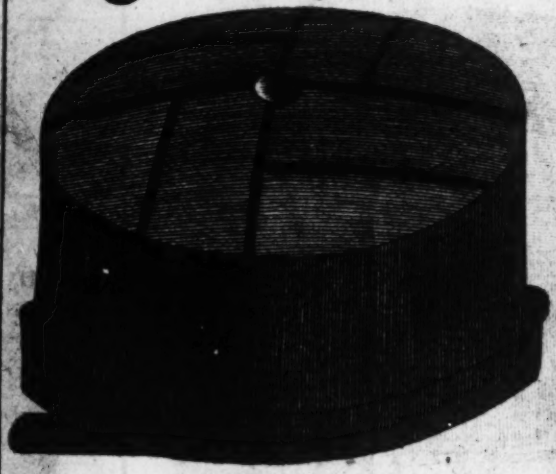

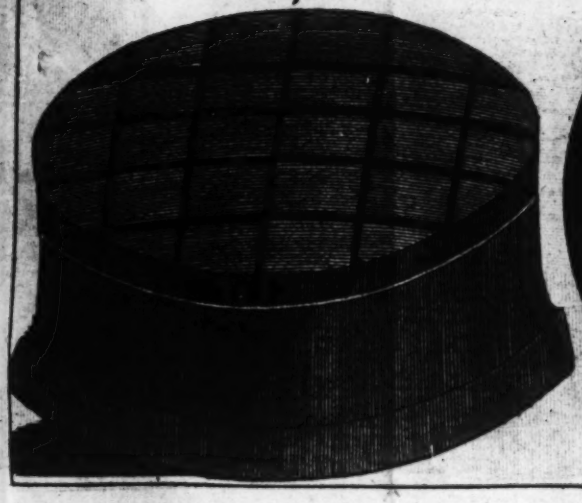

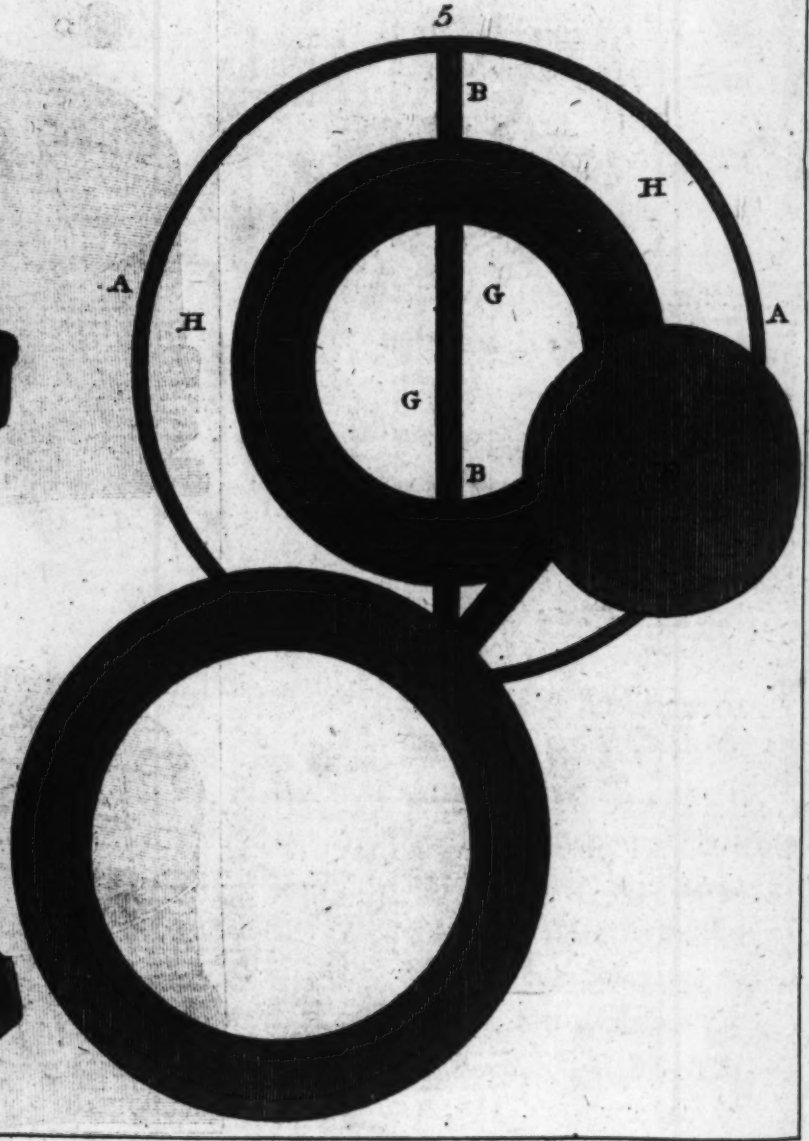

S. Lodge sc.

The Multiplying Glaſs.

THE multiplying glaſs is made by grinding down the round ſide h i k of a convex glaſs A B into ſeveral flat ſurfaces, as h b, b I d, d k. An object C will not appear magnified, when ſeen through this glaſs, by the eye at H; but it will appear multiplied into as many different objects as the glaſs contains plane ſurfaces. For, ſince rays will flow from the object C to all parts of the glaſs, and each plane ſurface will refract theſe rays to the eye, the ſame object will appear to the eye, in the direction of the rays which enter it through each ſurface. Thus a ray g i H, falling perpendicularly on the middle ſurface will go through the glaſs to the eye, without ſuffering any refraction; and will therefore ſhe wthe object in its true place at C: whilſt a ray a b flowing from the ſame object, and falling obliquely on the plane ſurface b h, will be refracted in the direction b e, by paſſing through the glaſs; and upon leaving it, will go on to the eye in the direction e H; which will cauſe the ſame object C to appear alſo at E, in the direction of the ray H e, produced in the right line H e n. And the ray c d, flowing from the object C, and falling obliquely on the plane ſurface d k, will be refracted (by paſſing through the glaſs and leaving it at f) to the eye at H; which will cauſe the ſame object to appear at D, in the direction H f m. If the glaſs be turned round the line g l H, as an axis, the object C will keep its place, becauſe the ſurface b l d is not removed; but all the other objects will ſeem to go round C, becauſe the oblique planes, on which the rays a b c d fall, will go round by the turning of the glaſs. Plate XVII Fig. 1.

The Camera Obſcura.

Fig. 2. THE camera obſcura is made by a convex glaſs C D, placed in a hole of a window-ſhutter. Then, if the room be darkened ſo as no light can enter but what comes through the glaſs, the pictures of all the objects (as fields, trees, buildings, men, cattle, &c.) on the outſide, will be ſhewn in an inverted order, on a white paper, placed at G H in the focus of the glaſs; and will afford a moſt beautiful and perfect piece of perſpective or landſcape of whatever is before the glaſs: eſpecially if the ſun ſhines upon the objects.

If the convex glaſs C D be placed in a tube in the ſide of a ſquare box, within which is the plane mirror E F, reclining backwards in an angle of forty-five degrees from the perpendicular k q, the pencils of rays flowing from the outward objects, and paſſing through the convex glaſs to the plane mirror, will be reflected upwards from it, and meet in points, as I and K (at the ſame diſtance that they would have met at H and G, if the mirror had not been in the way) and will form the aforeſaid images on an oiled paper ſtretched horizontally in the direction I K; on which paper the outlines of the images may be eaſily drawn with a black lead pencil; and then copied on a clean ſheet and coloured by art, as the objects themſelves are by nature. In this machine, it is uſual to place a plain glaſs, unpoliſhed, in the horizontal ſituation I K, which glaſs receives the images of the outward objects; and their outlines may be traced upon it by a black lead pencil.

The

The tube in which the convex glaſs C D is fixed, muſt be made to draw out, or puſh in, ſo as to adjuſt the diſtance of that glaſs from the plain mirror, in proportion to the diſtance of the outward objects; which the operator does, until he ſees their images diſtinctly painted on the horizontal glaſs at I K.

The forming a horizontal image, as I K, of an upright object A B, depends upon the angles of incidence of the rays upon the plane mirror E. F, being equal to their angles of reflection from it. For, if a perpendicular be ſuppoſed to be drawn to the ſurface of the plain mirror at e, where the ray A a C e falls upon it, that ray will be reflected upwards in an equal angle with the other ſide of the perpendicular, in the line e d I. Again, if a perpendicular be drawn to the mirror from the point f, where the ray A b f falls upon it, that ray will be reflected in an equal angle from the other ſide of the perpendicular, in the line f h l. And if a perpendicular be drawn from the point g, where the ray A c g falls upon the mirror, that ray will be reflected in an equal angle from the other ſide of the perpendicular, in the line g i l. So that all the rays of the pencil a b c, flowing from the upper extremity of the object A B, and paſſing through the convex-glaſs C D, to the plain mirror E F, will be reflected from the mirror, and meet at I, where they will form the extremity I of the image I K, ſimilar to the extremity A of the object A B. The like is to be underſtood of the pencil q r s, flowing from the lower extremity of the object A B, and meeting at K (after reflection from the plain mirror) the rays from the extremity K of the image, ſimilar to the extremity B of the object; and ſo of all the pencils that flow from the intermediate points of the object

object to the mirror, through the convex-glaſs. This may be further improved by placing a convex lens of ſix inches focal diſtance, and four inches diameter, or more if it be required longer between the mirror and the ground glaſs; and though this will reduce the picture, yet it will be more illuminated, and afford a pleaſanter view.

The Solar Teleſcope

IS a curious inſtrument, and is applied to uſe in the following manner. A ſcioptric ball and ſocket being faſtened againſt a hole in the window-ſhutter in a darkened chamber, place the end of a common refracting teleſcope with its object-glaſs and eye-glaſs into the cylindrical hole of the ſcioptric ball, and draw out the tube to its proper length; this being done the teleſcope and ball are moved about till it receives the ſun-beams perpendicular on the object-glaſs through the cylindrical hole of the ball; the tube with the eye-glaſs is then to be adjuſted by moving it either in or out, till the image of the ſun, formed on a white plane or ſcreen, is very diſtinct, large, and luminous.

In this manner the ſun's face is viewed without offence to the eyes, and whatever changes happen therein may be moſt accurately obſerved; the ſpots, which are ſeldom ſeen, even when viewed through ſmall teleſcopes in the common way, are here conſpicuous, and eaſy to be obſerved with all the different circumſtances of the ſpots beginning to appear; their increaſe, diviſion of one into many, or the uniting of many into one, their magnitude and decreaſe, their vaniſhing, and their diſappearance behind the ſun.

An

An eclipſe of the ſun may, by the ſolar teleſcope, be viewed to the greateſt advantage, we having it in our power to repreſent the face of the ſun as large as we pleaſe, conſequently the eclipſe proportionally conſpicuous; alſo the circle of the ſun's diſk may be ſo divided by lines and circles drawn thereon, that the quantity of the eclipſe intimated in digits may this way be exactly determined; alſo the exact time of the beginning, middle, and end thereof, for determining the longitude of the place, are ſeen to the greateſt advantage. The tranſits of Mercury and Venus over the face of the ſun, are exhibited moſt delightfully by this inſtrument: they will here appear truly round, well defined, and very black: their comparative diameters to that of the ſun may this way be obſerved, the direction of their motion, and the times of ingreſs and egreſs are here viewed to the greateſt perfection.

The *Helioſtata* to take off the inconveniences which ariſe from the motion of the earth, in making experiments on the ſolar light, was an excellent invention of Dr. *Graveſand:* it conſiſts of two principal parts, each of which conſiſts of many ſmaller parts. The firſt is a plain metallic ſpeculum, ſupported by a ſtand; the other is a clock which directs the ſpeculum according to the earth's motion, keeping the ſun in the ſame point of view.

The Acromatic Teleſcope.

THIS conſiſts of a double or treble object-glaſs; the double object-glaſs conſiſts of a double concave of white flint, and a double convex of crown glaſs. The parts of the lenſes, which are of the ſame ſide of the centers,

centers, may be conceived to act like two prisms, which refract contrary ways; and if the excess of refraction in the crown glass be such as to destroy the divergency of colour caused by the flint-glass, the incident ray will be refracted without any production of colour: the same is true of all the incident rays, and consequently the image formed in the focus of this compound object-glass will be free from colours; or, in other words, by means of the different refractive power of these two sorts of glass and their unequal figure, it comes to pass that all the rays of light incident upon those glasses from distant radiant objects, will pass through them in such a manner, that whatever aberration is occasioned in the heterogeneal rays in refraction through the first glass, is so far corrected by the second, that those rays emerge from it nearly parallel among themselves, and are converged to one focus, forming an image not sensibly compounded or coloured, and therefore are more perfect and distinct. It will therefore admit a much larger aperture, and of course a greater magnifying power than the common refracting telescopes possibly can; if the telescope be short, the convexity of the lenses will be considerable; and in such cases it is most convenient to combine three lenses, one concave of white flint-glass between two convex of crown glass; but still, where a great magnifying power is wanted, recourse must be had to refracting telescopes: these, and all other optical and philosophical instruments, are to be had in their greatest perfection of that ingenious artist Mr. George Adams, *Fleet Street, London*; whose assiduity in rendering philosophical researches familiar, is well known to the scientific.

CLOCK

CLOCK-MAKING.

Of the Terms of Art, or Names by which the Parts of an Automaton are called.

IT is neceſſary that I ſhould ſhew the meaning of the terms which clock-makers uſe, that gentlemen, and others, unſkilled in the art, may know how to expreſs themſelves properly, in ſpeaking; and alſo underſtand what I ſhall ſay in the following treatiſe:

I begin with the more general terms: as, the frame; which is that which contains the wheels, and the reſt of the Work. The pillars and plates are what it chiefly conſiſts of.

Next for the main-ſpring, and its appurtenances. That which the ſpring lies in, is the ſpring-box: that which the ſpring laps about, in the middle of the ſpring-box, is the ſpring-arbor; to which the ſpring is hooked at one end. At the top of the ſpring-arbor, is the endleſs-ſcrew, and its wheel: but in ſpring-clocks, it is a ratchet-wheel, with its click that ſtops it.

That which the main ſpring draweth, and about which the chain or ſtring is wrapped, and which is commonly taper, is the fuſy. In larger work, going with weights, where it is cylindrical, it is called the barrel: the ſmall teeth at the bottom of the fuſy, or barrel, that ſtop it in winding up, is the ratchet. That which ſtops it when wound up, and is for that end driven up by the ſtring, is the gardegut.

The parts of a wheel are, the hoop, or rim; the teeth; the croſs; and the collet, or piece of braſs, ſoldered on the arbor, or ſpindle, on which the wheel is rivetted.

A pinion, is that little wheel which plays in the teeth of the wheel: its teeth (which are commonly 4, 5, 6, 7, 8, &c.) are called leaves, not teeth.

The ends of the ſpindle, are called pivots: the holes in which they run, pivot holes.

The guttered wheel, with iron ſpikes at the bottom, in which the line of ordinary thirty-hour houſe-clocks doth run, is called the pulley.

I need not ſpeak of the dial-plate, the hands, ſcrews, wedges, ſtops, &c.

Thus much for general names, which are common to all parts of a movement.

The moſt uſual movements are watches and clocks. Watches, ſtrictly taken, are all ſuch movements as ſhew the parts of time; and clocks are ſuch as publiſh it, by

ſtriking

ſtriking on a bell, &c. But commonly the name of watches is appropriated to ſuch as are carried in the pocket; and that of clock to the larger movements, whether they ſtrike the hour or no. As for watches which ſtrike the hour, they are called pocket-clocks.

The parts of a movement, which I ſhall conſider, are the watch and clock parts.

The watch part of a movement, is that which ſerveth to the meaſuring the hours: in which the firſt thing I ſhall conſider is the balance; whoſe parts are the rim, which is the circular part of it; the verge is its ſpindle, to which belong the two pallets, or leaves, which play in the teeth of the crown-wheel: in pocket watches, that ſtrong ſtud, in which the lower pivot of the verge plays, and in the middle of which, one pivot of the balance-wheel plays, is called the pottance. The bottom of this is called the foot; the middle part (in which the pivot of the balance-wheel turns) is called the noſe; the upper part, the ſhoulder of the pottance. The piece which covers the balance, and in which the upper pivot of the balance plays, is the cock. The ſmall ſpring in pocket watches underneath the balance, is the regulator, or pendulum-ſpring.

The parts of a pendulum are the verge, pallets, and cocks, as before. The ball in long pendulums, the bob in ſhort ones, is the weight at the bottom: the rod, or wire is plain. The term peculiar to the royal ſwing, are the pads, which are the pallets in others, and are fixed on the arbor; the fork is alſo fixed to the arbor, and about ſix inches below, catcheth hold on the rod, at a flat piece of braſs, called the flat, in which the lower end of the ſpring is faſtened.

The names of the wheels next follow: the crown-wheel in ſmall pieces, and the ſwing wheel in royal pendulums, is that wheel which drives the balance, or pendulum.

The contrate-wheel, is that wheel in pocket-watches, and others, which is next to the crown-wheel, whoſe teeth and hoop lie contrary to thoſe of other wheels; whence it hath its name.

The great wheel, or firſt-wheel, is that which the fuſy, &c. immediately driveth. Next it are the ſecond-wheel, third-wheel, &c.

Next followeth the work between the frame and dial-plate: and firſt, is the pinion of report; which is that pinion which is commonly fixed on the arbor of the great wheel, and in old watches uſed to have commonly but four leaves; which driveth the dial-wheel, and this carrieth about the hand.

The laſt part which I ſhall ſpeak of is the clock, which is that part which ſerveth to ſtrike the hours: in which, I ſhall firſt ſpeak of the great or firſt wheel; which is that which the weight or ſpring firſt drives. In thirty-hour clocks, this is commonly the pin-wheel: this wheel, thus with pins, is called the ſtriking-wheel, or pin-wheel.

Next to this ſtriking-wheel, followeth the detent-wheel, or hoop-wheel, it having a hoop almoſt round it, in which is a vacancy, at which the clock locks.

The next is the third, or fourth-wheel (according as it is diſtant from the firſt wheel) called alſo the warning-wheel,

And

And laſtly, is the flying pinion, with a fly, or fan, to gather air, and ſo bridle the rapidity of the clock's motion.

Beſides theſe, there are the pinion of report, of which before, which driveth round the locking wheel, called alſo the count-wheel, with eleven notches in it commonly, unequally diſtant from one another, to make the clock ſtrike the hours of 1, 2, 3, &c.

Thus much for wheels of the clock part.

The detents are thoſe ſtops which, by being lifted up, or let fall down, do lock and unlock the clock in ſtriking.

The hammers ſtrike the bell: the hammer-tails are what the ſtriking-pins draw back the hammers by.

Latches are what lift up, and unlock the work.

Catches are what hold by hooking, or catching hold of.

The lifting pieces do lift up, and unlock the detents, in the clock part.

The train is the number of beats or vibrations which the watch maketh in an hour, or any other certain time.

There are beſide theſe, divers other terms which clock-makers uſe in various ſorts of pieces; as the ſnail or ſtep-wheel, in repeating-clocks, the rack, the ſafeguards, the ſeveral

ſeveral levers, lifters, and detents: but it would be tedious, and it is needleſs to mention the particulars.

For the better underſtanding theſe terms of art, and the parts of a clock, I have repreſented them to the eye: in which, two diſtinct parts may be obſerved; the watch, and the clock part.

The wheels, &c. on the right hand, is the watch part; they on the left, the clock.

Plate XVIII. Fig. 2.

D.D. The ſpring-boxes of the watch and clock part.

E. E. The great wheel of each part.

F. F. The fuſy of each part, about which the chain or ſtring is wrapped.

o. o. The click and ſpring of each part.

g. g. The ratchet of each part.

a. The hoop, or rim of the ſecond wheel.

b The croſs thereof.

c. The pinion.

d. The third wheel.

x. The pallet-wheel.


L. The pin-wheel, with the ſtriking-pins e. e. e.

m. The hoop-wheel.

n. The

CLOCK WORK

PLATE XVIII

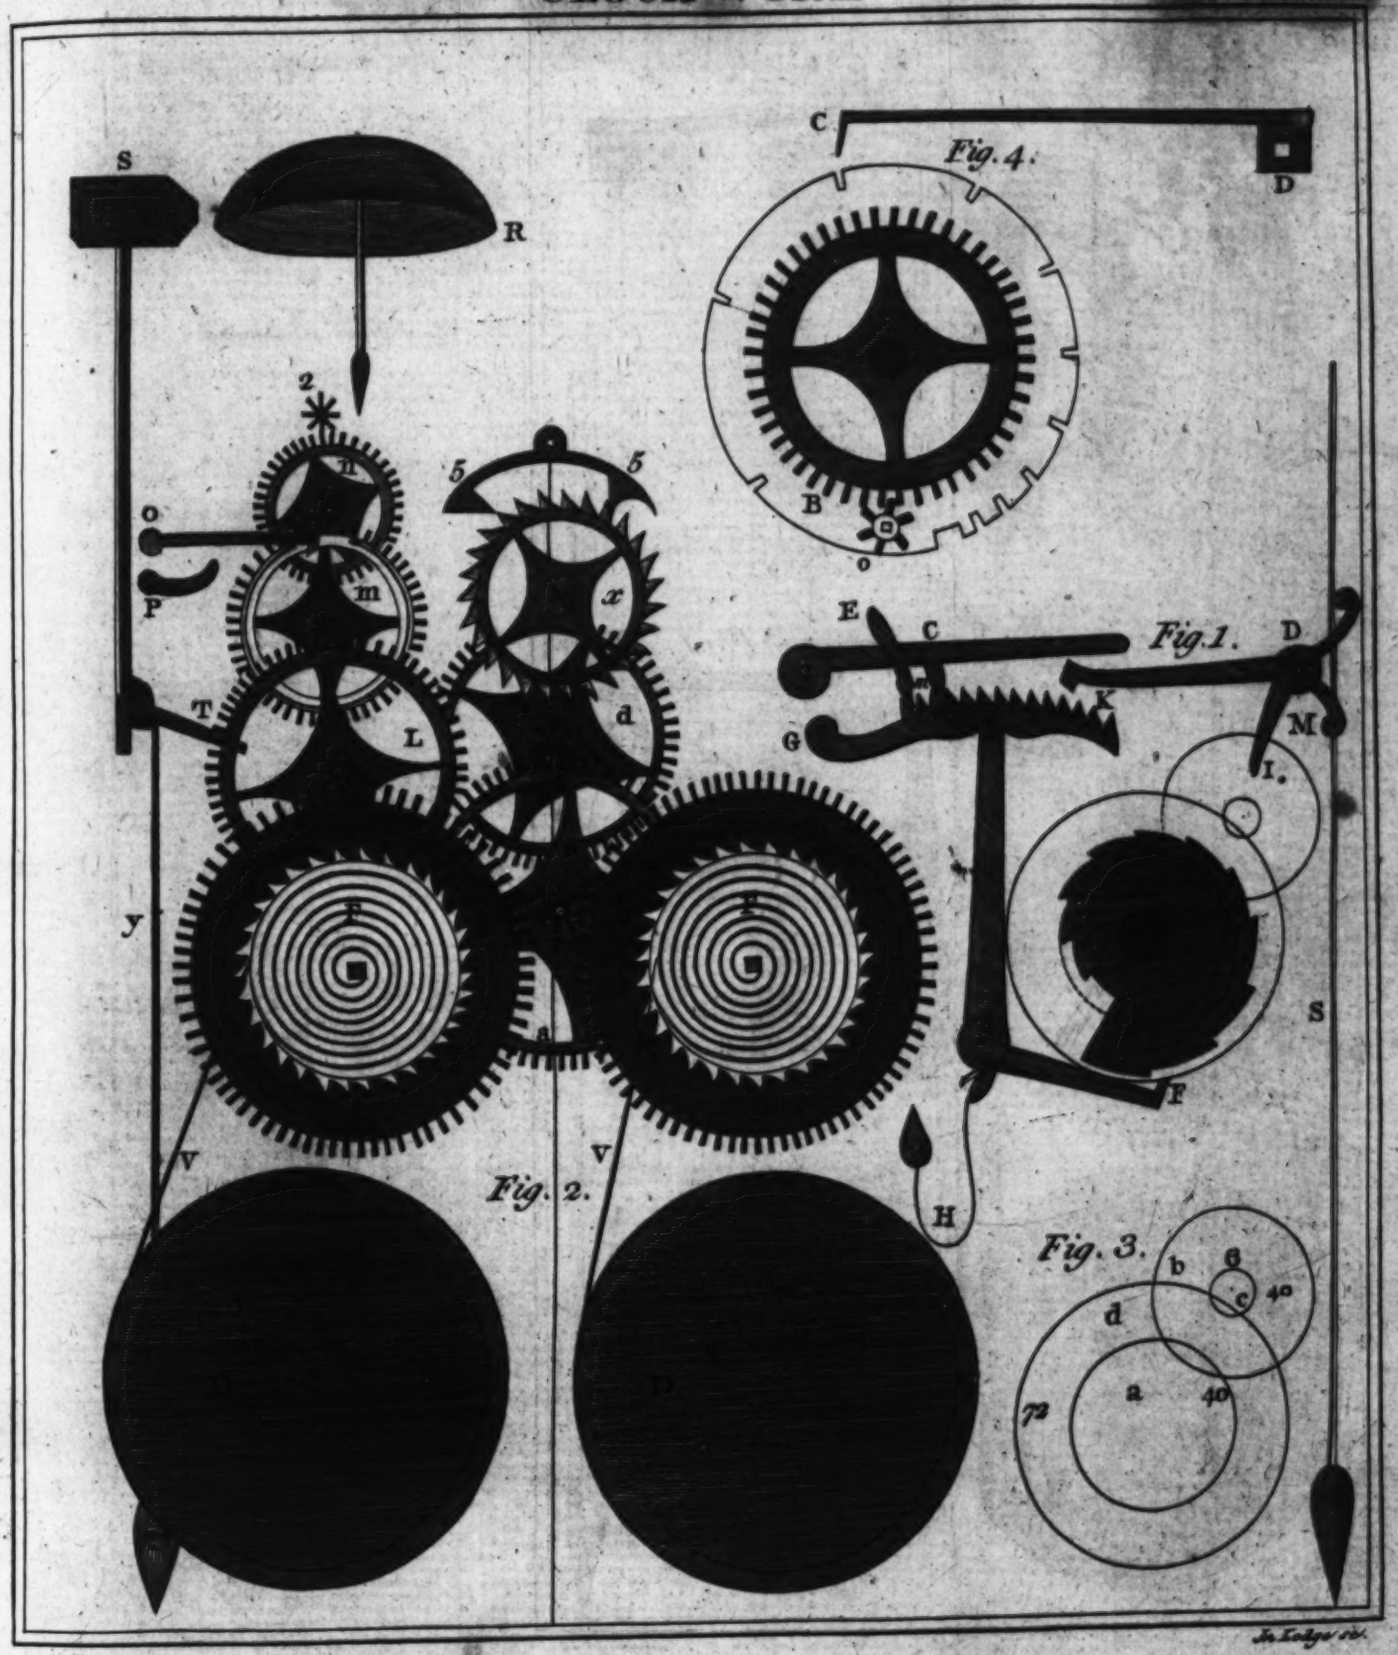

BRITISH MUSEUM
15 61
NOV

n. The warning wheel, or fourth-wheel.

O. The detent.

P. The lifting-piece.

2. The fan, and flying-pinion.

R. The bell.

S. The hammer.

T. The hammer-tail.

v. The hammer-ſpring.

V. V. The chain, or ſtring of the watch and clock.

The pendulum conſiſts of, 1. The rod. 2. The fork. 3. The flat. 4. The great ball. 5. The corrector, or regulator; being a contrivance of very great uſe to bring the pendulum to its niceſt vibrations, and is fixed on the verge at the end of the pallets 5. 5.

To find the Length of a Pendulum that ſhall make any Number of Vibrations in a Minute, and vice verſa.

A PENDULUM whoſe length is 59.2 inches, from the point of ſuſpenſion to the center of oſcillation, makes 60 vibrations in a minute: this is called ſtandard length. For any other number of vibrations in a minute, ſay as the ſquare of the given number of vibrations is to the

ſquare

ſquare of 60, ſo is the length of the ſtandard to the length ſought. Thus, ſuppoſe the given number of vibrations to be 30 per minute: the ſquare of 30 is 900, and the ſquare of 60 is 3600: then, as 900 is to 3600, ſo is 39.2 to 156.8: ſo that the length required for 30 vibrations per minute is 156.8 inches.

If the length of the pendulum be given, and the number of vibrations it makes in a minute might be required; ſay, as the given length is to the ſtandard length (39.2 inches) ſo is the ſquare of 60 vibrations to the ſquare of the number required: the ſquare root of which ſhall be the number of vibrations made by the pendulum in a minute. Thus, ſuppoſe the given length to be 156.8 inches: as 156.8 is to 39.2, ſo is 3600 (the ſquare of 60) to 900; the ſquare root of which is 30, the number of vibrations that this pendulum will make in a minute.

The length of a pendulum that would make only one vibration in a minute is 3920 yards, or 141120 inches: and the length of a pendulum that would make 240 vibrations in a minute (or 4 in a ſecond) is 2.45 inches.

In theſe calculations, it is ſuppoſed that the weight of the pendulum-rod bears little or no ſenſible proportion to the weight of the ball. But as this cannot be the caſe in practice, the center of oſcillation will always be further from the point of ſuſpenſion than the calculation makes it; and this muſt be found by trial.

To divide the Circumference of a Circle into any given Number of equal Parts, whether even or odd.

As there are very uncommon and odd numbers of teeth in ſome of the wheels of the aſtronomical clocks, and which, conſequently, could not be cut by any common engine uſed by clock-makers for cutting the numbers of teeth in their clock-wheels, I thought proper to ſhew how to divide the circumference of a circle into any given odd or even number of equal parts, ſo as that number may be laid down upon the dividing-plate of a cutting engine.

There is no odd number, but from which, if a certain number be ſubtracted, there will remain an even number, eaſy to be ſubdivided: thus, ſuppoſing the given number of equal diviſions of a circle on the dividing-plate to be 69; ſubtract 9, and there will remain 60.

Every circle is ſuppoſed to contain 360 degrees: therefore ſay, as the given number of parts in the circle, which is 69, is to 360 degrees, ſo is 9 parts to the correſponding arc of the circle that will contain them: which arc, by the rule of three, will be found to be 46 95-100. Therefore, by the line of chords on a common ſcale, or rather on a ſector, ſet off 46 95-100 (or 46 9-10) degrees with your compaſſes, in the periphery of the circle, and divide that arc or portion of the circle into 9 equal parts, and the reſt of the circle into 60; and the whole will be divided into 69 equal parts, as was required.

Again, ſuppoſe it were required to divide the circumference of a circle into 83 equal parts; ſubtract 3, and

80 will remain. Then as 83 parts are to 360 degrees, ſo (by the rule of proportion) are 3 parts to 13 degrees and one hundredth part of a degree; which ſmall fraction may be neglected. Therefore, by the line of chords, and compaſſes, ſet off 13 degrees in the periphery of the circle, and divide that portion or arc into 3 equal parts, and the reſt of the circle into 80; and the thing will be done.

Once more, ſuppoſe it were required to divide a given circle into 365 equal parts: ſubtract 5, and 360 will remain. Then, as 365 parts are to 360 degrees, ſo are 5 parts to 4 93-100 degrees. Therefore, ſet off 4 93-100 (or 4 9-10) degrees in the circle; divide that ſpace into 5 equal parts, and the reſt of the circle into 360; and the whole will be divided into 365 equal parts, as was required.

I have often found this rule or method very uſeful in dividing circles into an odd number of equal parts, or wheels into odd numbers of equal ſized teeth with equal ſpaces between them: and now I find it as eaſy to divide any given circle into any odd numbers of equal parts, as to divide it into any even number. For this purpoſe I prefer the line of chords on a ſector, to that on a plain ſcale; becauſe the ſector may be opened ſo, as to make the radius of the line of chords upon it equal to the radius of the given circle, unleſs the radius of the circle exceed the whole length of the ſector when it is opened ſo as to reſemble a ſtraight ruler, or ſcale; and this is what very ſeldom happens.

Any perſon who is uſed to handle the compaſſes, and the ſcale or ſector, may very eaſily, by a little practice, take

take off degrees, and fractional parts of a degree, by the accuracy of his eye, from a line of chords, near enough the truth for the above-mentioned purpoſe.

Suppoſing the Diſtance between the Centers of two Wheels, one of which is to turn the other, be given; that the Number of Teeth in one of theſe Wheels is different from the Number of Teeth in the other, and it is required to make the Diameters of theſe Wheels in ſuch Proportion to one another as their Numbers of Teeth are, ſo that the Teeth in both Wheels may be of equal Size, and the Spaces between them equal, that either of them may turn the other eaſily and freely,—it is required to find their Diameters.

HERE it is plain, that the diſtance between the centers of the wheels is equal to the ſum of both their radii in the working parts of the teeth. Therefore as the number of teeth in both wheels, taken together, is to the diſtance between their centers, taken in any kind of meaſure, as feet, inches, or parts of an inch; ſo is the number of teeth in either of the wheels to the radius or ſemidiameter of that wheel, taken in the like meaſure, from its center to the working part of any one of its teeth.

Thus, ſuppoſe the two wheels muſt be of ſuch ſizes as to have their diſtances between their centers 5 inches; that one wheel is to have ſeventy-five teeth, and the other to have 33, and that the ſizes of the teeth in both the wheels is equal, ſo that either of them may turn the other. The ſum of the teeth in both wheels is 108; therefore ſay, as 108 teeth is to 5 inches, ſo is 75 teeth to 3 inches and 47 hundred parts of an inch: and as 108

is to 5, ſo is 33 to 1 inch and 53 hundred parts of an inch. So that from the center of the wheel of 75 teeth to the working part of any tooth in it, is 3 inches and 47 hundred parts of an inch; and, from the center of the wheel of 33 teeth to the working part of either of its teeth, is 1 inch and 53 hundred parts of an inch.

General preliminary Rules and Directions for Calculation.

FOR the more clear underſtanding this, it muſt be obſerved, that thoſe automata (whoſe calculation I chiefly intend) do by little interſtices, or ſtrokes, meaſure out long portions of time. Thus the ſtrokes of the balance of a watch do meaſure out minutes, hours, days, &c.

Now to ſcatter thoſe ſtrokes amongſt wheels and pinions, and to proportionate them, ſo as to meaſure time regularly, is the deſign of calculation.

And in the firſt place, you are to know, that any wheel being divided by its pinions, ſhews how many turns that pinion hath to one turn of that wheel. Thus a wheel of 60 teeth driving a pinion of 6, will turn round the pinion 10 times in going round once. 6)60(10.

From the fuſy to the balance the wheels drive the pinions; and conſequently the pinions run faſter, or go more turns, than the wheels they run in. But it is contrary from the great wheel to the dial-wheel. Thus, in the laſt example, the wheel drives round the pinion 10 times: but if the pinion drove the wheel, it muſt turn 10 times to drive the wheel round once.

Before

Before I proceed further, I muſt ſhew how to write down the wheels and pinions; which may be done either as vulgar fractions, or in the way of diviſion in vulgar arithmetic. For example, a wheel of 60 moving a pinion of 5, may be ſet down 60-5ths; or thus 5)60: where the uppermoſt figure 60, or numerator, is the wheel, the lowermoſt or denominator, is the pinion: or in the latter example, the firſt figure is the pinion, the next without the hook the wheel.

The number of turns which the pinion hath in one turn of the wheel, is ſet without a hook on the right hand, as 5)60(12; i. e. a pinion 5 playing in a wheel of 60, moveth round 12 times in one turn of the wheel.

A whole movement may be noted thus, $\frac{4}{36}$ $\frac{55}{5}$ $\frac{45}{5}$ $\frac{40}{5}$ ſeventeen notches in the crown-wheel. Or rather becauſe eaſier to mean capacities, as you ſee here in the margin: where the uppermoſt number above the line is the pinion of report 4, the dial-wheel 36, and 9 turns of the pin of report. The ſecond number (under the line) is 5 the pinion, 55 is the great wheel, and 11 turns of the pinion it driveth. The third numbers are the ſecond wheel, &c. The fourth the contrate wheel, &c. And the ſingle number 17 under all, is the number of the crown-wheel.

4)36(9
5)55(11
5)45(9
5(40(8
17

By knowing the number of turns which any pinion hath in one turn of the wheel it worketh in, you may alſo find out how many turns a wheel or pinion hath at a greater diſtance; as the contrate wheel, crown wheel, &c. For it is but multiplying together the quotients (by the

quotients

quotients, I commonly mean the number of turns; which number is ſet on the right hand, without the hook, as is ſhewn in the laſt example) and the number produced is the number of turns. An example will make what I ſay plain: let us chuſe three numbers here ſet down; the firſt of which hath 11 turns, the next 9, and the laſt 8. If you multiply 11 and 9, it produceth 99, for 9 times 11 is 99, that is in one turn of the wheel 55, there are 99 turns of the ſecond pinion 5, or the wheel 40, which runs concentrical, or on the ſame arbor with the ſecond pinion 5. For as there are 11 turns of the firſt pinion 5, in one turn of the great wheel 55, or (which is the ſame) of the ſecond wheel 45, which is on the ſame ſpindle with that pinion 5; ſo there are 9 times 11 turns in the ſecond pinion 5, or wheel 40 in 1 turn of the great wheel 55. If you multiply the laſt quotient 8 (that is, 8 times 99 is 792) it ſhews the number of turns which the third and laſt pinion 5 hath. So that this third and laſt pinion turns 792 times in one turn of the firſt wheel 55. Another example will make it ſtill more plain. The example is in the margin. The turns are 10, 9, and 8. Theſe multiplied as before, run thus, viz. 10 times 9 is 90, that is the pinion 6 (which is the pinion of the third wheel 40, and runs in the ſecond wheel 54) turns 90 times in one turn of the firſt wheel 80. This laſt product 90 being multiplied by 8, produces 720; that is, the pinion 5 (which is the pin of the crown-wheel 15) turns 720 times in one turn of the firſt wheel of 80 teeth.

5) 55 (11
5) 45 (9
5) 40 (8

8) 80 (10
6) 54 (9
5) 40 (8
15

A whole

A whole Movement of a modern Pocket Watch may be noted thus:

	Teeth	Leaves
The great wheel -	48 -	12
Centre wheel -	54 -	6
Third wheel -	48 -	6
Contrate wheel -	48 -	6
Balance wheel -	15 -	2 pallets.

Thus when the watch is wound up, the chain from the ſpring exerts a force upon the fuſee, which gives motion to all parts of the machine.

The great wheel on the fuſee having 48 teeth, and driving the center wheel by a pinion of 12 leaves, make the center wheel turn round four times in one turn of the fuſee. Thus alſo we may account for all others; for,

If 12) 48 (4 = Turns of the center wheel,
So 6) 54 (9 = Turns of the third wheel.
6) 48 (8 = Turns of the contrate wheel,
6) 48 (8 = Turns of the balance.

Then multiply theſe ſeveral quotients together ſucceſſively, and you will find the turns of each of thoſe wheels reſpectively in one turn of the fuſee.

Thus 1 turn of the fuſee, or great wheel; 4 mul. 1 = to 4 turns of the center wheel; 9 mul. 4, mul. 1 = to 36 turns of the third wheel; 8 mul. 9, mul. 4. mul. 1 = to 288 turns of the contrate wheel; 8 mul. 9 mul. 4 mul. 1 = to 2304 turns of the balance wheel.

And

And the balance wheel having 15 teeth, and each ſtriking a pallet twice in one revolution, there will be thirty ſtrokes upon the axis of the balance, which are called the beats of the balance; conſequently there muſt be 2304 mul. 30 = 69120 ſtrokes or beats in one turn of the fuſee or great wheel.

But though theſe particulars are neceſſary to be premiſed, our principal regard, in the diviſion of time, is to be paid to the center wheel. For this wheel alone is that upon which both the hour and minute-hand is moved or carried round upon the face of the watch, to ſhew the hour of the day, and the minute of the hour, &c.

If we would find out the number of beats of the balance in the time of thoſe turns above-mentioned, it muſt be noted, that as the watch goes thirty hours, and the minute-hand, and conſequently the center wheel goes round once in an hour, the ſaid center wheel will have thirty turns in the time of the watch's going round; and becauſe it hath four turns in one of the fuſee, therefore we muſt ſay 4)30(= 7 $\frac{1}{2}$ = the number of turns of the fuſee, in winding up the watch. Whence we find 69120 mul. 7, 5 = 518400 = the number of the beats in 30 hours. Then if we divide 518400 by 30, the quotient will be 17280 = number of beats in an hour, which is called the train of a watch; which train is called ſwifter or ſlower, as the number of beats in an hour is more or leſs: ſo again, if we divide this train 17280 by 3600, the ſeconds in an hour, the quotient will be almoſt 5, or almoſt 5 beats per ſecond in ſuch a watch.

By

By this analyſis, it is eaſy to form an idea of the manner of calculation for the numbers of the teeth and leaves for the ſeveral wheels and pinions in a watch; which may further be illuſtrated by an example of a train 14400, which will beat quarter ſeconds, becauſe ſuch a train is uſeful in many philoſophical caſes, as well as in the juſt diviſion of time.

Suppoſe the intended watch is to go 32 hours; then it will be found that 14400 multiplied by 32 = 460800 = the beats of the balance in 32 hours. And if the number of turns in the fuſee be 8, then 8)460800(= 57600 = the beats in one turn of the fuſee.

Again, ſuppoſe the number of teeth in the balance-wheel be 15, there will be 30 beats in one turn of this wheel; then 30)57600(= 1920, which will be the number ariſing from the continued multiplication of all the quotients of the wheels, divided by the pinions they drive from the great wheel to the balance-wheel, as has been already exemplied.

Our next care is to break this number into four convenient ſmall numbers, which, multiplied together, ſhall make the ſame number 1920. Then I ſay, 4)1920(= 480. Again, I ſay, 6)480(= 80: and as I plainly ſee that 80 = 8 multiplied by 10, conſequently the four numbers ſought for are 4, 6, 8, and 10; becauſe, multiply theſe numbers together, they will make exactly 1920: thus, 4 mul. 6 mul. 8. mul. 10 = 1920.

The quotients thus inveſtigated, we may eaſily find what large numbers, divided by ſmall ones, will pro-

duce the ſaid quotients: thus 12)48(= 4. Conſequently, if we allow 48 teeth to the great wheel on the fuſee, it muſt drive a pinion of 12 on the center-wheel. So again, if for the quotient 6, we chooſe 54 and 9 (thus 9)54(= 6) it ſhews that the teeth of the center wheel may be 54; and it muſt drive a pinion of 9 on the third wheel. Or if, inſtead of 54 and 9, we chuſe 48 and 8, it will anſwer the ſame end: thus 8)48(=6. As for the quotient 10, we may eaſily perceive that 50 and 5 will anſwer the enquiry: thus 5)50(= 10; ſo the third wheel having 50 teeth, muſt drive a pinion of 5 on the contrate wheel: where note, that if the ſaid wheel has 40 or 60 teeth, and drive a pinion of 4 or 6, we ſhall find the ſame number of turns exactly: and as for the quotient 8, we have the number 48 and 6: thus, 6)48(=8; or, 7)56(=8; or, 5)40(=8: therefore, if the contrate wheel be allowed 40, or 48, or 56 teeth, it will drive a pinion of 5, 6, or 7 leaves on the balance-wheel.

Thus it is to determine and adjuſt all the wheels and pinions in the body of a watch, from the fuſee to the balance, ſo far as to relate to the minute of an hour, and to the ſeconds and quarter ſeconds of a minute.

Having ſhewed, as clearly as I can, the way of calculating numbers for the watch-part, I ſhall alſo briefly ſhew the principles of the ſtriking part.

Altho' this part conſiſts of many wheels and pinions, yet reſpect needs to be had only to the count-wheel, ſtriking-wheel, and detent-wheel, which move round in this proportion; the count-wheel B moveth round commonly once in 12 or 24 hours. The detent-wheel

Fig. 4

moves

moves round every ſtroke the clock ſtriketh; ſometimes but once in two ſtrokes. From whence it follows,

1. That as many pins as are in the pin-wheel, ſo many turns hath the detent-wheel in one turn of the pin-wheel: or (which is the ſame) the pins of the pin-wheel are the quotient of that wheel, divided by the pinion of the detent-wheel. But if the detent-wheel moveth but once round in two ſtrokes of the clock, then the ſaid quotient is but half the number of pins.

2. As many turns of the pin-wheel as are required to perform the ſtrokes of 12 hours (which are 78) ſo many turns muſt the pinion of report have, to turn round the count-wheel once. Or thus: Divide 78 by the number of ſtriking-pins, and the quotient thereof ſhall be the quotient for the pinion of report and the count-wheel. All this is, in caſe the pinion of report be fixed to the arbor of the pin-wheel, as is very commonly done.

All this I take to be very plain: or, if it be not, the example in the margin will clear all difficulties. Here the locking-wheel A is 48, the pinion of report is 8, the pin-wheel is 78, the ſtriking-pins are 13: and ſo the reſt. I need only to remark here, that 78 being divided by the 13 pins, gives 6; which is the quotient of the pinion of report O, as was before hinted; and the notches of the plate B ſerve to let the locking-piece C fall into; which comes from the detent D.

8)48(6

6)78(13 pins

6)60(10

6)48(8

As for the warning-wheel and flying-pinion, it matters little what numbers they have, their uſe being only to bridle the rapidity of the motion of the other wheels.

Numbers of ſeveral Sorts of Movements.

Although I have before given ſuch plain directions as may, I hope, accompliſh a young practitioner in the art of calculation, yet it may be very convenient to ſet down ſome numbers fit for ſeveral movements; partly to be as examples to exerciſe the young reader; and partly to ſerve ſuch who want leiſure or underſtanding to attain to the art of calculation.

Numbers of an Eight-Day Piece, with 16 *Turns of the Barrel: the Pendulum vibrates Seconds, and ſhews Minutes, Seconds, &c.*

Watch part.	Clock part.
8)96	8)78
8(60—40)40—6)72	7)56 8 pins
7)56	7)49
——	7)49
30	

In the watch part, the wheel 60 is the minute-wheel, which is ſet in the middle of the clock, that its ſpindle may go through the middle of the dial-plate, to carry the minute-hand.

Fig. 3. Alſo, on this ſpindle is the wheel 40, a, which driveth another wheel b of 40; which laſt hath a pinion 6, c, which driveth round that of 72 d in 12 hours. Note two things:

things: 1. That the two wheels 40, are of no other uſe but to ſet the pinion 6 at a convenient diſtance from the minute-wheel, to drive the wheel 72, which is concentrical with the minute-wheel; for a pinion 6 driving a wheel 72, would be ſufficient, if the minute-hand and hour-hand had two different centers. 2. Theſe numbers, 60—40)40—6(72, ſet thus, ought, according as above, to be thus read, viz. The wheel 60 hath another wheel 40, on the ſame ſpindle; which wheel 40, divideth (playeth in, or turns round) another wheel 40; which hath a pinion 6 concentrical with it; which pinion driveth or divideth a wheel of 72; for a line parting two numbers (as 60—48) denoteth thoſe two numbers to be concentrical, or to be placed upon the ſame ſpindle. And when two numbers have a hook between them (as 48)48) it ſignifies one to run in the other.

In the ſtriking part, there are 8 pins on the ſecond-wheel 56. The count-wheel may be fixed unto the great wheel, which goeth round once in 12 hours.

A Piece of 32 *Days, with* 16 *Turns both Parts: the Watch ſheweth Hours, Minutes, and Seconds; and the Pendulum vibrateth Seconds.*

Watch part, with 16 turns.	Striking part, with 16 turns.
16)96	10)130
9)72	8)96 { 24 pins / 12)39
8)60—48)48—6)72	6)72 double hoop.
7)56	6)60
30	

The

The pinion of report is fixed on the end of the arbor of the pin-wheel. The pinion is 12, the count-wheel 39; thus, 12)39.

A Two Months Piece of 64 *Days, with* 16 *Turns; Pendulum vibrateth Seconds, and ſheweth Minutes, Seconds, &c.*

Watch part.	Clock part.
9)90	10)80
8)76	10)65
8)60—48)48—6)72	9)54 { 12 pins — 8)52
7)56	5)60 double hoop.
30	5)50

Here the third wheel is the pin-wheel; which alſo carrieth the pinion of report 8, driving the count-wheel 52.

A Sevenmonth-Piece, with Turns, Pendulum, and Motions, as before.

Watch.	Clock.
8)60	8)96
8)56	8)88—27)12
8)48	8)64—16 pins
6)45—48)48—6)72	6)48 double hoop
5)40	6)48
30	

A Year-

A Year-Piece of 384 *Days, with Turns, Pendulums, and Motions, as before.*

Watch.	Clock.
12)108	10)120
9)72	8)96—36)9
8)64	6)78.26 pins
8)60—48)48—6)72	6)72 double hoop
7)56	6)60
30	

If you had rather have the pinion of report on the ſpindle of the pin-wheel, it muſt be 13)39.

A Piece of 30 *Hours, Pendulum about* 6 *Inches.*

Watch.	Clock.
12)48	8)48
6)78	6)78 13 pins
6)60	6)60
6)42	6)48
15	

A 30 *Hour-Piece, to ſwing Seconds.*

Watch part.	Clock part.
6)90	6)78 13 pins
6)72	6)54
30	7)49

Repeating Work.

LET A be a piece of braſs cut down in twelve ſpiral ſteps, in form of a ſnail (from whence it takes its name) as in the figure; let this be fixed on the ſocket of the hour-wheel; and BGLF the rack, with 14 teeth, turning on its center L, having a ſpring H to force the end F upon Fig. 1.


upon the ſteps of the ſnail A, when at liberty. The pin at I in the motion-wheel, takes hold of the lifting-piece D M K; and the end K, in riſing, lifts up the hook C, which lies in the teeth of the rack, and riſes until the teeth are diſengaged from it; the end F then falls down, and ſtops againſt the ſteps of the ſnail A, which in the figure is at two o'clock.

The arbor of the third or gathering-wheel m (fig. 2.) comes thro' the plate on which the pallet E m (fig. 1.) is fixed; a turn of which anſwering to one ſtroke of the hammer, gathers the rack up one tooth: 12 ſteps of the ſnail anſwer 12 teeth in the rack; and when the gathering pallet E m, has taken as many teeth in the rack as the number of the hour, the end E of the pallet ſtops againſt a pin in the rack at G, and is there at reſt until the hook C is again lifted out of the teeth by the lifting-piece, as before.

When the hook C is lifted out of the teeth of the rack, the clock would ſtrike continually, as the hook being out of the teeth, prevents the rack being gathered up; but that the end K of the lifting-piece has a ſmall arm which goes through the plate, and a pin in the wheel n, which ſtops againſt it in ſuch a manner, that when the lifting-piece is ſuffered to fall by the pin I, having gone paſt the pin in the rim of the wheel n, it is clear of the arm at the end of the lifting-piece K; the wheel being then at liberty, the clock ſtrikes until the gathering pallet E ſtops againſt the pin of the rack at G, as before. By putting a ſmall ſtring to the top-end of the ſpring S, to come thro' the caſe, it may be made to ſtrike the laſt hour at any time, except when on the warning.

THE *COPERNICAN* OR *SOLAR SYSTEM*

PLATE XI

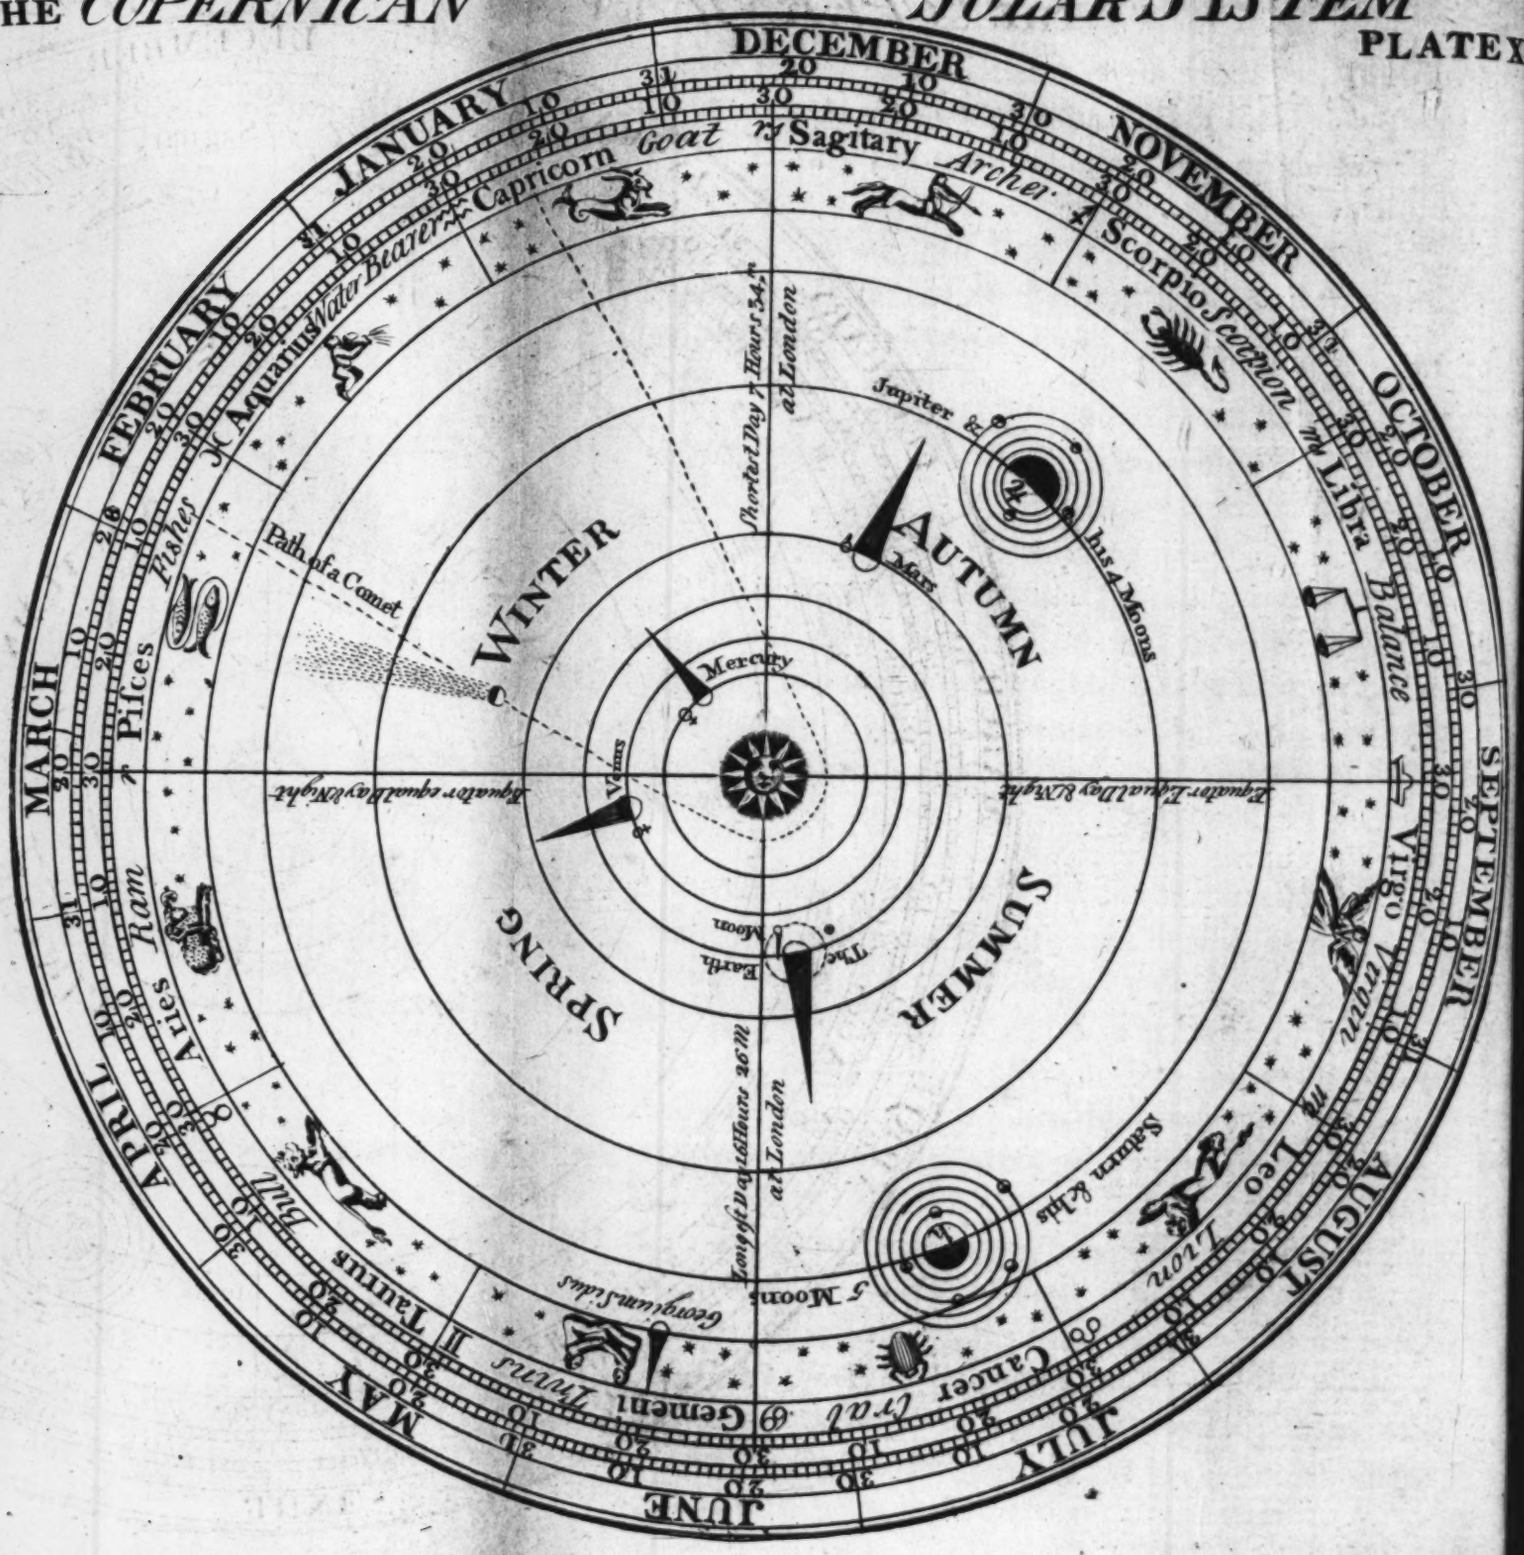

ASTRONOMY.

A brief Deſcription of the Solar Syſtem.

THE Sun, with the planets and comets which move round him as their center, conſtitute the ſolar ſyſtem. Thoſe planets which are near the Sun, not only finiſh their circuits ſooner, but likewiſe move faſter in their reſpective orbits, than thoſe which are more remote from him. Their motions are all performed from weſt to eaſt, in orbits nearly circular. Their names, diſtances, bulks, and periodical revolutions, are as follow: — Plate XIX.

The Sun, an immenſe globe of fire, is placed near the common center of all the planets, and turns round his axis in 25 days 6 hours, as is evident by the motion of ſpots ſeen on his ſurface; which have often been remarked to keep this time before they diſappeared. His diameter is computed to be 763,000 miles: all planets ſeen from him move the ſame way, and according to the order of the ſigns in the graduated circle, Aries, Taurus, Gemini, Cancer, &c. which repreſent the great ecliptic in the heavens; but as ſeen from any one planet, the reſt appear ſometimes to go backward, and ſometimes forward, and ſometimes to ſtand ſtill, not in circles or ellipſes, but in looped curves, which never return into themſelves.

Mercury. Mercury, the neareſt planet to the Sun, goes round him in 87 days 23 hours of our time nearly; which is the length of his year. But being ſeldom ſeen, and no ſpots appearing upon his ſurface or diſk, the time of his rotation on his axis, or the length of his days and nights, are as yet unknown. His diſtance from the Sun is computed to be 32,000,000 of miles, and his diameter 2,600. In his courſe round the Sun, he moves at the rate of 95,000 miles every hour. His light and heat from the Sun are almoſt ſeven times as great as ours; and the Sun appears to him near ſeven times as large as to us.

His orbit is inclined ſeven degrees to the ecliptic; and that node from which he aſcends northward above the ecliptic, is in the 14th degree of Taurus; the oppoſite in the 14th degree of Scorpio. The Earth is in theſe points on the 6th of November and 4th of May, new ſtile; and when Mercury comes to either of his nodes, when he is between the Earth and Sun in the nearer part of his orbit, he will appear to paſs over the diſk or face of the ſun, like a dark round ſpot; but in all other parts of his orbit, his conjunctions are inviſible, becauſe he either goes above or below the Sun.

According to Mr. Whiſton, he will appear on the Sun's diſk in 1789, Dec. 6th, at 3h. 55m. in the afternoon; and in 1799, May 7th, at 2h. 34m. in the afternoon. There will be ſeveral intermediate tranſits, but none of them viſible in this latitude.

Venus. Venus, the next planet in order, is computed to be 59 millions of miles from the Sun; and by moving at the rate

rate of 69,000 miles every hour in her orbit, ſhe goes round the Sun in 224 days 17 hours of our time nearly; in which, tho' it be the full length of her year, ſhe has only nine days one quarter, according to the beſt obſervations; ſo that, to her, every day and night together, is as 24 1-3d days and nights with us. This odd 1-4th of a day in every year, makes every fourth year to Venus, as the like does to our Earth. Her diameter is 7,906 miles; and, by her diurnal motion, the inhabitants about her equator are carried 43 miles every hour, beſides the 69,000 above mentioned.

Venus's orbit is inclined 3½ degrees to the Earth's, and croſſes it in the 14th degree of Gemini and of Sagittarius.

The axis of Venus is inclined 75 degrees to the axis of her orbit; which is 51½ degrees more than the Earth's axis is inclined to the axis of the ecliptic; and therefore her ſeaſons vary much more than ours do. The north pole of her axis inclines toward the 20th degree of Aquarius; the Earth's to the beginning of Cancer; conſequently the northern parts of Venus have ſummer in the ſigns where thoſe of the Earth have winter, and *vice verſa*.

As her annual revolution contains only 9¼ of her days, the Sun will always appear to go thro' a whole ſign, or 12th part of her orbit, in little more than three quarters of her natural day, or nearly in 13¾ of our days and nights.

She ſhews the ſame appearances to us regularly every eight years; her conjunctions, elongations, and times of

riſing and ſetting, being very nearly the ſame on the ſame days as before.

Earth. The Earth is the next planet above Venus in the ſyſtem. It is 82,000,000 of miles from the ſun, and goes round him in 365 days 5 hours 49 minutes, from any equinox or ſolſtice to the ſame again; but from any fixed ſtar to the ſame again, as ſeen from the Sun, in 365 days 6 hours and 9 minutes; the former being the length of the tropical year, and the latter the length of the ſydereal. It travels at the rate of 58,000 miles every hour; which motion, tho' 120 times ſwifter than that of a cannon-ball, is little more than half as ſwift as Mercury's motion in his orbit. The Earth's diameter is 7,970 miles; and by turning round its axis every 24 hours from weſt to eaſt, it cauſes an apparent diurnal motion of all the heavenly bodies from eaſt to weſt. By this rapid motion of the earth on its axis, the inhabitants about the equator are carried 1,042 miles every hour, while thoſe on the parallel of London are carried only about 580, beſides the 58,000 miles by the annual motion above mentioned, which is common to all places whatever. The Earth's axis makes an angle of 23½ degrees with the axis of its orbit; and keeps nearly the ſame oblique direction, inclining towards the ſame fixed ſtars throughout its annual courſe, which cauſes the return of ſpring, ſummer, autumn, and winter.

Moon. The Moon is not a planet, but only a ſatellite or attendant of the Earth, going round the Earth from change to change, in 29 days 12 hours and 44 minutes; and round the Sun with it every year. The Moon's diameter is 2,180 miles; and her diſtance from the Earth's center 24,000. She goes round her orbit in 27 days

days 7 hours 43 minutes, moving about 2,290 miles every hour; and turns round her axis exactly in the time that she goes round the earth; which is the reason of her keeping always the same side towards us; and that her day and night together is as long as our lunar month.

The Moon is an opaque globe, like the Earth, and shines only by reflecting the light of the Sun; therefore, whilst that half of her which is towards the Sun is enlightened, the other half must be dark and invisible. Hence, she disappears when she comes between us and the Sun, because her dark side is then towards us. When she is gone a little forward, we see a little of her enlightened side; which still increases to our view as she advances forward, until she comes to be opposite to the Sun, and then her whole enlightened side is towards the Earth; and she appears with a round illuminated orb, which we call the Full Moon; her dark side being then turned away from the Earth. From the full, she seems to decrease gradually as she goes through the other half of her course; shewing us less and less of her enlightened side every day, till her next change or conjunction with the sun; then she disappears, as before.

This continual change of the Moon's phases demonstrates, that she shines not by any light of her own; for if she did, being globular, we should always see her with a round full orb, like the Sun. She has very little difference of seasons, her axis being almost perpendicular to the ecliptic. What is very singular, one half of her has no darkness at all; the Earth constantly affording it a strong light in the Sun's absence; while the other half has a fortnight's darkness and a fortnight's light, by turns.

The

The Earth is a moon to the Moon, waxing and waning regularly, but appearing thirteen times as big, and affording her thirteen times as much light as ſhe does to us. When ſhe changes to us, the Earth appears full to her; and when ſhe is in her firſt quarter to us, the Earth is in its third quarter to her, and *vice verſa*.

But from one half of the Moon the Earth is never ſeen at all: from the middle of the other half it is always ſeen over head; turning round almoſt thirty times as quick as the Moon does. From the circle which limits our view of the Moon, only one half of the Earth's ſide next her is ſeen; the other half being hid below the horizon of all places on that circle. To her the Earth ſeems the biggeſt body in the univerſe; for it appears 13 times as big as ſhe does to us. Her orbit croſſes the ecliptic in two oppoſite points, called the Moon's Nodes; ſo that one half of her orbit is above the ecliptic, and the other below it. The angle of obliquity is $5\frac{1}{3}$ degrees: as the Earth turns round its axis, the ſeveral continents, ſeas, and iſlands, appear to the Moon's inhabitants like ſo many ſpots of different forms and brightneſs, moving over its ſurface; but much fainter at ſome times than others, as our clouds cover them or leave them. By theſe ſpots the Lunarians can determine the time of the Earth's diurnal motion, juſt as we do the motion of the Sun: and perhaps they meaſure their time by the motion of the Earth's ſpots; for they cannot have a truer dial.

Mars. The planet Mars is next in order, being the firſt above the Earth's orbit: his diſtance from the Sun is computed to be 125,000,000 of miles; and he moves at the rate of 47,000 miles every hour: he goes round the

the Sun in 686 of our days and 23 hours; which is the length of his year, and contains 667¾ of his days; every day and night together being 40 minutes longer than with us. His diameter is 4,444 miles; and by his diurnal rotation, the inhabitants about his equator are carried 556 miles every hour. His quantity of light and heat is equal but to one half of ours; and the Sun appears but half as big to him as to us.

This planet being but a fifth part ſo big as the earth, if any moon attends him ſhe muſt be very ſmall; and has not yet been diſcovered by our beſt teleſcopes. He is of a fiery red colour; and, by his appulſes to ſome of the fixed ſtars, ſeems to be encompaſſed by a very groſs atmoſphere. He appears ſometimes gibbous, but never horned; which both ſhews that his orbit includes the Earth within it, and that he ſhines not by his own light.

To Mars, the Earth and Moon appear like two moons, a bigger and a leſs, changing places with one another, and appearing ſometimes horned, ſometimes half or three quarters illuminated, but never full; nor at moſt above one quarter of a degree from each other, altho' they are 240,000 miles aſunder.

The Earth appears almoſt as big to Mars as Venus does to us; and at Mars it is never ſeen above 48 degrees from the Sun. Sometimes it appears to paſs over the diſk of the Sun; and ſo do Mercury and Venus; but Mercury can never be ſeen from Mars by ſuch eyes as ours, unaſſiſted by proper inſtruments; and Venus will be as ſeldom ſeen as we ſee Mercury: Jupiter and Saturn are as viſible to Mars as to us. His axis is perpendicular to the ecliptic, and his orbit is two degrees inclined to it.

Jupiter,

Jupiter.

Jupiter, the biggeſt of all the planets, is ſtill higher in the ſyſtem, being about 426,000,000 of miles from the Sun; and going at the rate of 25,000 miles every hour in his orbit, finiſhes his annual period in eleven of our years 314 days and 12 hours. He is above 1000 times as big as the Earth, for his diameter is 81,000 miles, which is more than ten times the diameter of the Earth.

Jupiter turns round his axis in 9 hours 56 minutes, ſo that his year contains 10,470 days; and the diurnal velocity of his equatorial parts is greater than the ſwiftneſs with which he moves in his annual orbit: a ſingular circumſtance, as far as we know. By this prodigious quick rotation, his equatorial inhabitants are carried 25,920 miles every hour (which is 920 miles an hour more than an inhabitant of this Earth's equator moves in 24 hours) beſides the 25,000 above mentioned, which is common to all his ſurface, by his annual motion.

His belts and ſpots.

Jupiter is ſurrounded by faint ſubſtances, called Belts, in which ſo many changes appear, that they are generally thought to be clouds: for ſome of them have been firſt interrupted and broken, and then have vaniſhed entirely. They have ſometimes been obſerved of different breadths, and afterwards have become nearly all of the ſame breadth. Large ſpots have been ſeen in theſe belts; and when a belt vaniſhes, the contiguous ſpots diſappear with it.

He has no change of ſeaſons.

The axis of Jupiter is ſo nearly perpendicular to his orbit, that he has no ſenſible change of ſeaſons: which is a great advantage, and wiſely ordered by the Author of Nature; for if this planet's axis was inclined any conſiderable

ſiderable number of degrees, juſt ſo many degrees round each pole would in their turn be almoſt ſix of our years together in darkneſs. And, as each degree of a great circle on Jupiter contains 706 of our miles at a mean rate, it is eaſy to judge what vaſt tracts of land would be rendered uninhabitable by any conſiderable inclination of his axis.

but has four moons.

The ſun appears but 1-28th part ſo big to Jupiter as to us; and his light and heat are in the ſame ſmall proportion, but compenſated by the quick returns thereof, and by four moons (ſome bigger and ſome leſs than our earth) which revolve about him; ſo that there is ſcarce any part of this huge planet but what is during the whole night enlightened by one or more of theſe moons, except his poles, whence only the fartheſt moons can be ſeen, and where their light is not wanted, becauſe the ſun conſtantly circulates in or near the horizon, and is very probably kept in view of both poles by the refraction of Jupiter's atmoſphere; which, if it be like ours, has certainly refractive power enough for that purpoſe.

Their periods round Jupiter.

The orbits of theſe moons are repreſented in this ſcheme of the ſolar ſyſtem by four ſmall circles on Jupiter's orbit; but they are drawn fifty times too large in proportion to it. The firſt moon, or that neareſt to Jupiter, goes round him in 1 day 18 hours and 36 minutes of our time; and is 229 thouſand miles diſtant from his center: The ſecond performs its revolution in three days 13 hours and 15 minutes, at 364 thouſand miles diſtance: The third in 7 days 3 hours and 59 minutes, at the diſtance of 580 thouſand miles: And the fourth, or outermoſt, in 16 days 18 hours and 30 minutes, at the diſtance of one million of miles from his center.

Two grand diſcoveries made by the eclipſe of Jupiter's moons.

Jupiter's three neareſt moons fall into his ſhadow, and are eclipſed in every revolution: but the orbit of the fourth moon is ſo much inclined, that it paſſeth by its oppoſition to Jupiter, without falling into his ſhadow, two years in every ſix. By theſe eclipſes, aſtronomers have not only diſcovered that the ſun's light takes up eight minutes of time in coming to us, but they have alſo determined the longitudes of places on this earth with greater certainty and facility, than by any other method yet known.

The place of his nodes

Jupiter's orbit is 1 degree 20 minutes inclined to the ecliptic. His north node is in the 7th degree of Cancer, and his ſouth node in the 7th degree of Capricorn.

Saturn.

Saturn, next in order, is about 780,000,000 of miles from the ſun; and travelling at the rate of 18,000 miles every hour, performs its annual circuit in 29 years 167 days and 5 hours of our time; which makes only one year to that planet. Its diameter is 67,000 miles; and therefore it is near 600 times as big as the earth.

His ring.

This planet is ſurrounded by a thin broad ring, as an artificial globe is by a horizon. The ring appears double when ſeen through a good teleſcope. It is inclined 30 degrees to the ecliptic, and is about 21,000 miles in breadth: which is equal to its diſtance from Saturn on all ſides. There is reaſon to believe that the ring turns round its axis, becauſe, when it is almoſt edgewiſe to us, it appears ſomewhat thicker on one ſide of the planet than on the other; and the thickeſt edge has been ſeen on different ſides at different times. But Saturn having no viſible ſpots on his body, whereby to determine the time of his turning round his axis, the

the length of his days and nights, and the poſition of his axis, are unknown to us at preſent.

His five moons.

To Saturn, the ſun appears only 1-90th part ſo big as to us; and the light and heat he receives from the ſun are in the ſame proportion to ours. But to compenſate for the ſmall quantity of ſun-light, he has five moons, all going round him on the outſide of his ring, and nearly in the ſame plane with it. The firſt, and neareſt moon to Saturn, goes round him in one day 21 hours 19 minutes; and is 140,000 miles from his center. The ſecond, in 2 days 17 hours 40 minutes; at the diſtance of 187,000 miles. The third, in 4 days 10 hours 25 minutes; at 263,000 miles diſtance. The fourth, in 15 days 22 hours 41 minutes; at the diſtance of 600,000 miles. And the fifth, or outermoſt, at 1,800,000 miles from Saturn's center, goes round him in 72 days 7 hours 48 minutes. Their orbits, in the ſcheme of the ſolar ſyſtem, are repreſented by the five ſmall circles on Saturn's orbit; but theſe, like the orbits of the other ſatellites, are drawn fifty times too large in proportion to the orbits of their primary planets.

How the ring appears to Saturn and to us.

This ring, ſeen from Saturn, appears like a vaſt luminous arch in the heavens, as if it did not belong to the planet. When we ſee the ring moſt open, its ſhadow upon the planet is broadeſt: and from that time the ſhadow grows narrower, as the ring appears to do to us; until, by Saturn's annual motion, the ſun comes to the plane of the ring, or even with its edge; which being then directed towards us, becomes inviſible on account of its thinneſs. The ring diſappears twice in every annual revolution of Saturn, namely, when he is in the 19th degree both of Piſces and of Virgo. And

In what ſigns Saturn appears to loſe his ring; and in

what ſigns it appears moſt open to us.

when Saturn is in the middle between theſe points, or in the 19th degree either of Gemini or of Sagittarius, his ring appears moſt open to us; and then its longeſt diameter is to its ſhorteſt, as 9 to 4.

Places of Saturn's nodes.

The orbit of Saturn is $2\frac{1}{2}$ degrees inclined to the ecliptic, or orbit of our earth, and interſects it in the 21ſt degree of Cancer and of Capricorn; ſo that Saturn's nodes are only 14 degrees from Jupiter's.

Georgium Sidus.

On the 13th day of March, 1781, between the hours of ten and twelve at night, as Dr. Herſchell, the Aſtronomer Royal, at Windſor, was attempting to diſcover the parallax of the ſtars, by means of double, triple, and quadruple fixed ſtars, he diſcovered a new planet, belonging to our ſyſtem, as he was examining the ſmall ſtars near the feet of Gemini, which he named Georgium Sidus, in honour to our preſent Sovereign. It is ſeldom to be ſeen very plainly by the naked eye: it is nearly the colour of Jupiter, or ſomewhat paler and more faint; and its apparent diameter about 4 ſeconds. By the calculation of M. De la Lande, we are told that his diſtance from the ſun is 19 times farther than the earth is; and its diameter is 4 1-half times that of the earth's.

It is highly probable that all the planets are inhabited.

Every perſon who looks upon, and compares the ſyſtems of moons together which belong to Jupiter and Saturn, muſt be amazed at the vaſt magnitude of theſe two planets, and the noble attendance they have in reſpect of our little earth: and can never bring himſelf to think that an infinitely wiſe Creator ſhould diſpoſe of all his animals and vegetables here, leaving the other planets bare and deſtitute of rational creatures. To ſuppoſe that he had any

view

view to our benefits in creating theſe moons, and giving them their motions round Jupiter and Saturn; to imagine that he intended theſe vaſt bodies for any advantage to us, when he well knew that they could never be ſeen but by a few aſtronomers peeping through teleſcopes; and that he gave to the planets regular returns of days and nights, and different ſeaſons to all where they would be convenient, but of no manner of ſervice to us, except only what immediately regards our own planet the earth; to imagine, I ſay, that he did all this on our account, would be charging him impiouſly with having done much in vain; and as abſurd, as to imagine that he has created a little ſun and a planetary ſyſtem within the ſhell of our earth, and intended them for our uſe. Theſe conſiderations amount to little leſs than a poſitive proof that all the planets are inhabited: for if they are not, why all this care in furniſhing them with ſo many moons, to ſupply thoſe with light which are at the greater diſtances from the ſun? Do we not ſee, that the farther a planet is from the ſun, the greater apparatus it has for that purpoſe? ſave only Mars, which being but a ſmall planet, may have moons too ſmall to be ſeen by us: and Georgium Sidus being at too great a diſtance for us to attain any knowledge of his moons. We know that the earth goes round the ſun, and turns round its own axis, to produce the viciſſitudes of ſummer and winter by the former, and of day and night by the latter motion, for the benefit of its inhabitants. May we not then fairly conclude, by parity of reaſon, that the end and deſign of all the other planets is the ſame? And is not this agreeable to the beautiful harmony which exiſts throughout the univerſe? Surely it is; and raiſes in us the moſt magnificent ideas of the Supreme Being, who is everywhere, and at all times preſent, diſplaying his power, wiſdom,

and

and goodneſs among all his creatures! and diſtributing happneſs to innumerable ranks of various beings!

Aſtronomical Characters explained.

♈ Aries	♌ Leo	♐ Sagittary
♉ Taurus	♍ Virgo	♑ Capricorn
♊ Gemini	♎ Libra	♒ Aquarius
♋ Cancer	♏ Scorpio	♓ Piſces.

♄ Saturn	☿ Mercury	☋ Her ſouth node
♃ Jupiter	☾ Luna (the Moon)	⊖ Tellus, Terra, or the Earth
♂ Mars	☊ Moon's north node	
☉ Sol (the Sun)		
♀ Venus		

☌ Conjunction when the planets are in the ſame ſign, deg. min. &c.

✱ Sextile when 2 ſigns diſt.	△ Trine when 4 ſigns diſt.
□ Quartile when 3 ſigns diſt.	☍ Oppoſition when 6 ſigns diſt.

Eclipſes.

Every planet and ſatellite is illuminated by the ſun; and caſts a ſhadow towards that point of the heaven which is oppoſite to the ſun. This ſhadow is nothing but a privation of light in the ſpace hid from the ſun by the opaque body that intercepts his rays.

When the ſun's light is ſo intercepted by the moon, that to any place of the earth the ſun appears partly or wholly covered, he is ſaid to undergo an eclipſe; tho', properly ſpeaking, it is only an eclipſe of that part of the earth where the moon's ſhadow or penumbra falls. When the earth comes between the ſun and moon, the moon falls into

into the earth's ſhadow; and having no light of her own, ſhe ſuffers a real eclipſe from the interception of the ſun's rays. When the ſun is eclipſed to us, the moon's inhabitants on the ſide next the earth (if any ſuch there be) ſee her ſhadow like a dark ſpot travelling over the earth, about twice as faſt as its equatorial parts move, and the ſame way as they move. When the moon is in an eclipſe, the ſun appears eclipſed to her, total to all thoſe parts on which the earth's ſhadow falls, and of as long continuance as they are in the ſhadow.

If the earth and ſun were equally big, the earth's ſhadow would be infinitely extended, and all of the ſame bulk; and the planet Mars, in either of its nodes, and oppoſite to the ſun, would be eclipſed in the earth's ſhadow. Were the earth bigger than the ſun, its ſhadow would increaſe in bulk the farther it extended, and would eclipſe the great planets Jupiter and Saturn, with all their moons, when they were oppoſite to the ſun. But as Mars in oppoſition never falls into the earth's ſhadow, although he is not then above 42 millions of miles from the earth, it is plain that the earth is much leſs than the ſun; for otherwiſe its ſhadow could not end in a point at ſo ſmall a diſtance. If the ſun and moon were equally big, the moon's ſhadow would go on to the earth with an equal breadth, and cover a portion of the earth's ſurface more than 2000 miles broad, even if it fell directly againſt the earth's center, as ſeen from the moon; and much more if it fell obliquely on the earth: but the moon's ſhadow is ſeldom 150 miles broad at the earth, unleſs when it falls very obliquely on the earth, in total eclipſes of the ſun. In annular eclipſes, the moon's real ſhadow ends in a point at ſome diſtance from the earth. The moon's ſmall diſtance from the earth, and the ſhortneſs of her ſhadow, prove her to be leſs than the

ſun.

ſun. And as the earth's ſhadow is large enough to cover the moon, if her diameter were three times as large as it is (which is evident from her long continuance in the ſhadow when ſhe goes through its center) it is plain, that the earth is much bigger than the moon.

Why there are ſo few eclipſes.


If the moon's orbit where coincident with the plane of the ecliptic, in which the earth always moves and the ſun appears to move, the moon's ſhadow would fall upon the earth at every change, and eclipſe the ſun to ſome parts of the earth. In like manner the moon would go thro' the middle of the earth's ſhadow, and be eclipſed at every full; but with this difference, that ſhe would be totally darkened for above an hour and an half; whereas the ſun never was above four minutes totally eclipſed by the interpoſition of the moon. But one half of the moon's orbit is elevated 5 1-3d degrees above the ecliptic, and the other half as much depreſſed below it; conſequently, the moon's orbit interſects the ecliptic in two oppoſite points, called the moon's nodes, as has been already taken notice of. When theſe points are in a right line with the center of the ſun at new or full moon, the ſun, moon, and earth are all in a right line; and if the moon be then new, her ſhadow falls upon the earth; if full, the earth's ſhadow falls upon her. When the ſun and moon are more than 17 degrees from either of the nodes at the time of conjunction, the moon is then generally too high or too low in her orbit to caſt any part of her ſhadow upon the earth. And when the ſun is more than 12 degrees from either of the nodes at the time of full moon, the moon is generally too high or too low in her orbit to go through any part of the earth's ſhadow: and in both theſe caſes there will be no eclipſe. But when the moon is leſs than 17 degrees from either node at the time


The moon's nodes.

Limits of eclipſes.

ECLIPSES

Plate XX

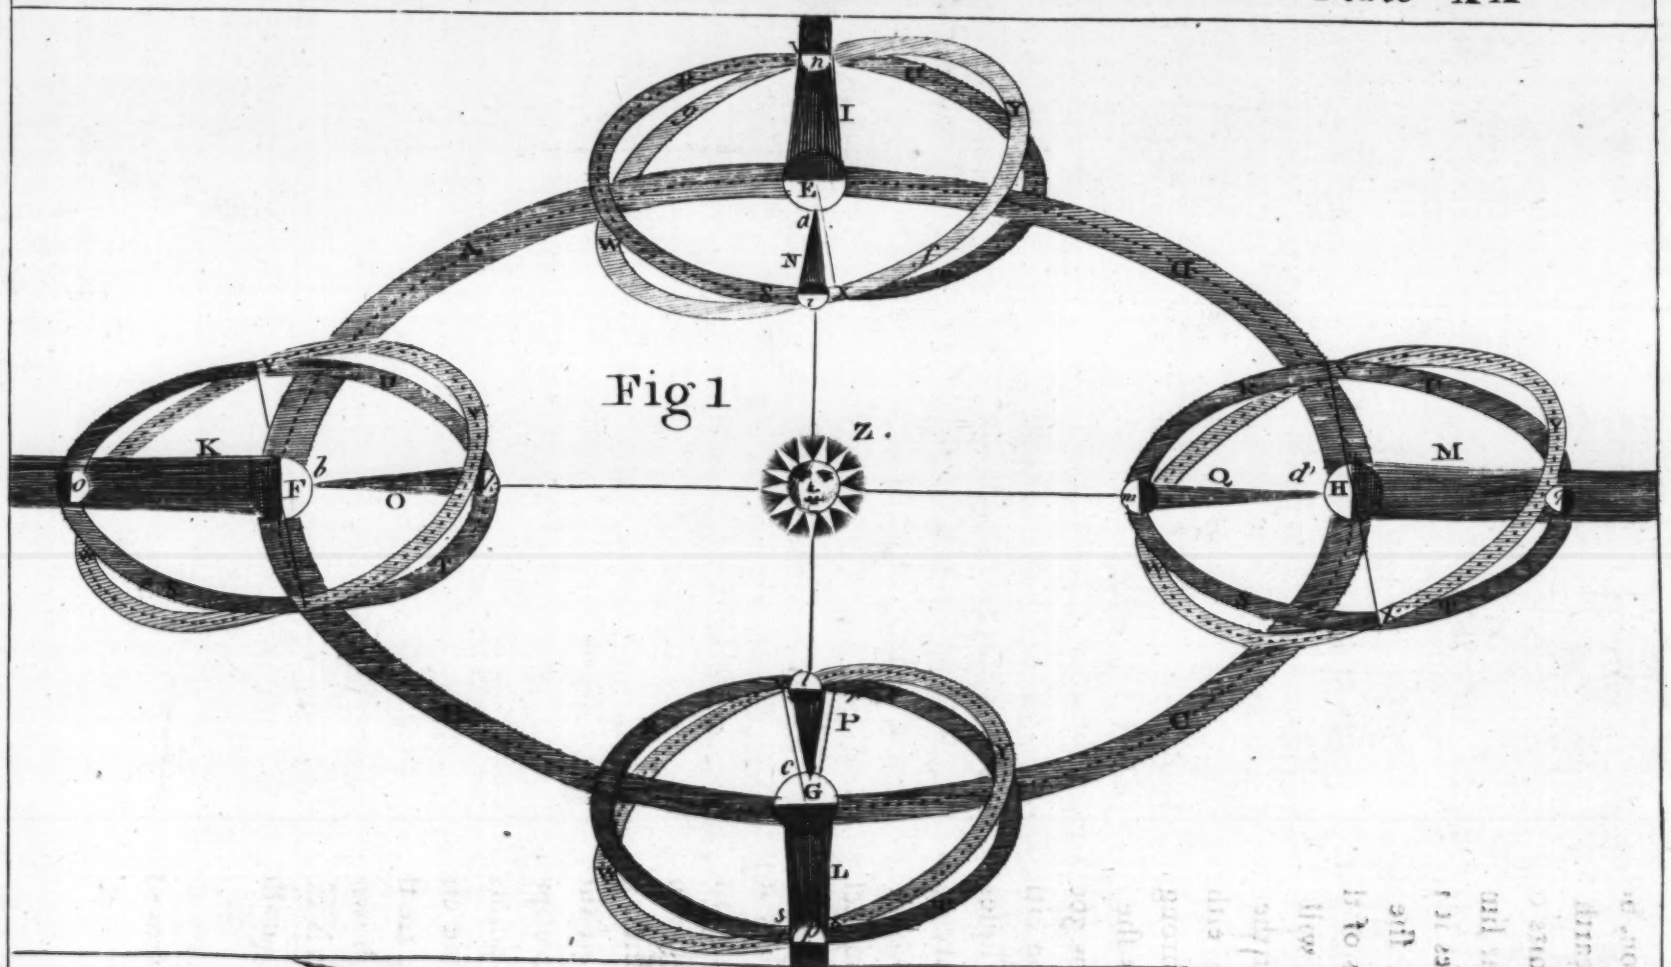

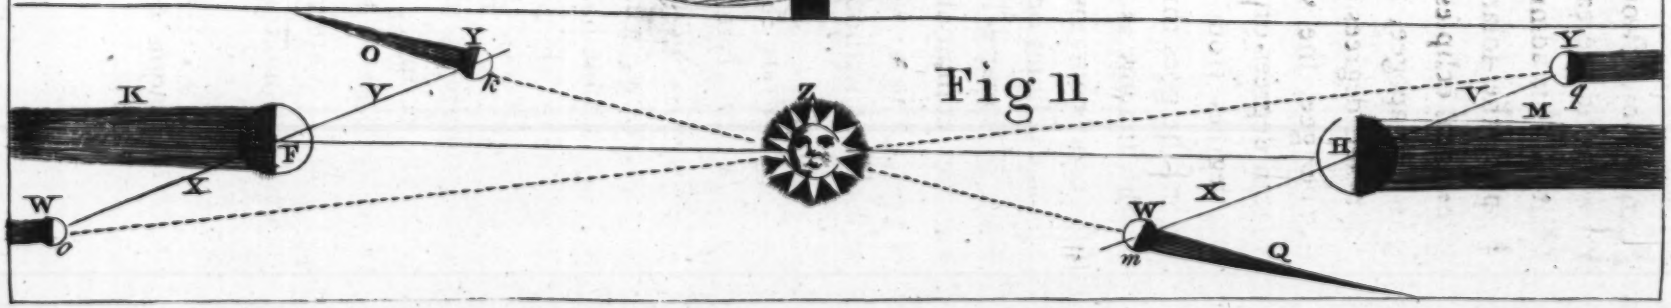

time of conjunction, her ſhadow or penumbra falls more or leſs upon the earth as ſhe is more or leſs within this limit. This admits of ſome variation; for, in apogeal eclipſes, the ſolar limit is but 16 1-half degrees; and in perigeal eclipſes it is 18 1-3d. When the full moon is in her apogee, ſhe will be eclipſed if ſhe be within 10 1-half degrees of the node; and when ſhe is full in her perigee, ſhe will be eclipſed if ſhe be within 12 1-30th degrees of the node. And when ſhe is leſs than 12 degrees from either node at the time of oppoſition, ſhe goes through a greater or leſs portion of the earth's ſhadow as ſhe is more or leſs within this limit. Her orbit contains 360 degrees; of which 17, the limit of ſolar eclipſes on either ſide of the nodes, and 12 the limit of lunar eclipſes, are but ſmall portions: and as the ſun commonly paſſes by the nodes but twice in a year, it is no wonder that we have ſo many new and full moons without eclipſes.

To illuſtrate this, let A B C D be the ecliptic, R S T U a circle lying in the ſame plane with the ecliptic, and V W X Y, the moon's orbit, all thrown into an oblique view, which gives them an elliptical ſhape to the eye. One half the moon's orbit, as V W X, is always below the ecliptic, and the other half X Y V above it. The points V and X, where the moon's orbit interſects the circle R S T U, which lies even with the ecliptic, are the moon's nodes; and the right line, as X E V, drawn from one ſide to the other thro' the earth's center, is called the line of the nodes; which is carried almoſt parallel to itſelf round to the ſun in a year. Plate XX. Fig. 1. Line of the nodes.

If the moon moved round the earth in the orbit R S T U which is coincident with the plane of the

ecliptic, her ſhadow would fall upon the earth every time ſhe is in conjunction with the ſun; and at every oppoſition ſhe would go through the earth's ſhadow. Were this the caſe, the ſun would be eclipſed at every change, and the moon at every full, as already mentioned.

But although the moon's ſhadow N muſt fall upon the earth at a, when the earth is at E, and the moon in conjunction with the ſun at i, becauſe ſhe is then very near one of her nodes; and at her oppoſition n ſhe muſt go through the earth's ſhadow I, becauſe ſhe is then near the other node; yet, in the time that ſhe goes round the earth to her next change, according to the order of the letters X Y V W, the earth advances from E to e, according to the order of the letters E F G H; and the lines of the nodes V E X being carried nearly parallel to itſelf, brings the point f of the moon's orbit in conjunction with the ſun at the next change; and then the moon being at f, is too high above the eclipſe to caſt her ſhadow on the earth: and as the earth is ſtill moving forward, the moon at her next oppoſition will be at g, too far below the ecliptic to go through any part of the earth's ſhadow; for by that time the point g will be at a conſiderable diſtance from the earth, as ſeen from the ſun.

When the earth comes to F, the moon in conjunction with the ſun Z is not at k, in a plane coincident with the ecliptic, but above it at Y, in the higheſt part of her orbit: and then the point b of her ſhadow O goes far above the earth, as in fig. 2, which is an edge-view of fig. 1. The moon at her next oppoſition is not at o, fig. 1, but at W, where the earth's ſhadow goes far above her, as in fig. 2. In both theſe caſes the line of

the

the nodes V F X, fig. 1, is about 90 degrees from the ſun, and both luminaries are as far as poſſible from the limits of eclipſes.

When the earth has gone half round the ecliptic from E to G, the line of the nodes V G X is nearly, if not exactly, directed towards the ſun at Z; and then the new moon I caſts her ſhadow P on the earth G; and the full moon p goes through the earth's ſhadow L; which brings on eclipſes again, as when the earth was at E.

When the earth comes to H, the new moon falls not at m in a plane coincident with the ecliptic C D, but at W in her orbit below it: and then her ſhadow Q fig. 2, goes far below the earth. At the next full ſhe is not at q, fig. 1, but at Y in her orbit 5 1-3d degrees above q, and at her greateſt height above the ecliptic C D; being then as far as poſſible, at any oppoſition, from the earth's ſhadow M, as in fig. 2.

So when the earth is at E and G, the moon is about her nodes at new and full; and in her greateſt north and ſouth declination (or latitude, as it is generally called) from the ecliptic at her quarters: but when the earth is at F or H, the moon is in her greateſt north and ſouth declination from the ecliptic at new and her full, and in the nodes about her quarters.

The point X where the moon's orbit croſſes the ecliptic, is called the aſcending node, becauſe the moon aſcends from it above the ecliptic: and the oppoſite point of interſection V is called the deſcending node, becauſe the moon deſcends from it below the ecliptic. When the moon is at Y, in the higheſt point of her orbit, ſhe is

The moon's aſcending and deſcending node.

Her north and ſouth latitude.

in her greateſt north latitude; and when ſhe is at W, in the loweſt point of her orbit, ſhe is in her greateſt ſouth latitude.

The nodes have a retrograde motion;

If the line of nodes, like the earth's axis, was carried parallel to itſelf round the ſun, there would be juſt half a year between the conjunctions of the ſun and nodes. But the nodes ſhift backward, or contrary to the earth's annual motion, 19 1-third degrees every year; and therefore the ſame node comes round the ſun 19 days ſooner every year than on the year before. Conſequently, from the time that the aſcending node X (when the earth is at E) paſſes by the ſun as ſeen from the earth, it is only 173 days (not half a year) till the deſcending node V paſſes him. Therefore, in whatever time of the year we have eclipſes of the luminaries about either node, we may be ſure, that in 173 days afterward, we ſhall have eclipſes about the other node. And when at any time of the year the line of the nodes is in the ſituation V G X, at the ſame time next year it will be in the ſituation r G s; the aſcending node having gone backward, *i. e.* contrary to the order of ſigns, from X to s, and the deſcending node from V to r; each 19 1-3d degrees. At this rate the nodes ſhift through all the ſigns and degrees of the ecliptic in 18 years and 225 days; in which time there would always be a regular period of eclipſes, if any complete number of lunations were finiſhed without a fraction. But this never happens; for if both the ſun and moon ſhould ſtart from a line of conjuction with either of the nodes in any point of the ecliptic, the ſun would perform 18 annual revolutions and 222 degrees over and above, and the moon 230 lunations and 85 degrees of the 231ſt, by the time the node came round to the ſame point of the ecliptic again;

which brings on the eclipſes ſooner every year than they would be if the nodes had not ſuch a motion.

again; ſo that the ſun would then be 98 degrees from the node, and the moon 85 degrees from the ſun.

But, in 223 mean lunations, after the ſun, moon, and nodes, have been once in a line of conjunction, they return ſo nearly to the ſame ſtate again, as that the ſame node, which was in conjunction with the ſun and moon at the beginning of the firſt of theſe lunations, will be within 28 degrees 12 ſeconds of a degree of a line of conjunction with the ſun and moon again, when the laſt of theſe lunations is completed. And therefore, in that time, there will be a regular period of eclipſes, or returns of the ſame eclipſe, for many ages. A period of eclipſes.

On the UNIVERSE.

THIS wide machine the univerſe regard,
With how much ſkill is each apartment rear'd!
The ſun a globe of fire, a glowing maſs,
Hotter than melting flint or fluid glaſs.
Of this our ſyſtem holds the middle place.
Mercury, the neareſt to the central ſun,
Does in an oval orbit circling run;
But rarely is the object of our ſight:
In ſolar glory ſunk, and more prevailing light.

Venus

Venus the next, whoſe lovely beams adorn
As well the dewy eve as op'ning morn,
Does in her orb in beauteous order turn.
The Globe Terreſtrial next, with ſlanting poles,
And all its pond'rous load unweary'd rolls.
Mars next in order, farther from the ſun,
Does in a more extenſive orbit run.
Then we behold bright planetary Jove,
Sublime in ſpace, thro' his wide province move;
Four ſecond planets his dominion own,
And round him turn, as round the earth the moon.
Saturn revolving in a higher ſphere,
Is by five moons attended thro' his year.
The vaſt dimenſion of his path, is found
Five thouſand million Engliſh miles around.
Then Georgium Sidus, fartheſt from the Sun,
In boundleſs ſpace does round his orbit turn.

Yet is this mighty ſyſtem, which contains
So many worlds, ſuch vaſt æthereal planes,
But one of thouſands which compoſe the whole;
Perhaps as glorious, and of worlds as full!
The ſtars which grace the high expanſion, bright,
By their own beams and unprecarious light,
Tho' ſome near neighbours ſeem, and ſome diſplay
United luſtre in the milky way,
At a vaſt diſtance from each other lie,
Sever'd by ſpacious voids of liquid ſky.—
All theſe illuſtrious worlds, and many more,
Which by the tube aſtronomers explore;
And millions which the glaſs can n'er deſcry,
Loſt in the wilds of vaſt immenſity,

Are

Are ſuns, are centers, whoſe ſuperior ſway,
Planets of various magnitudes obey.

If we with one clear comprehenſive ſight
Saw all theſe ſyſtems, all theſe orbs of light;
If we their order and dependence knew,
Had all their motions and their ends in view,
With all the comets which in either ſtray,
Yet conſtant to their time and to their way,
Would not this view convincing marks impart
Of perfect wiſdom and ſtupendous art!

FINIS.



CURIOUS AND USEFUL

Miſcellaneous Articles.

ADVERTISEMENT.

THE greateſt part of the publications which have appeared on the ſubjects treated of in Miſcellaneous Articles, after having drawn their readers into much unneceſſary expence, have left them nearly in the ſame ſtate of ignorance as that in which they were found.

This has ariſen partly from the obſcure and perplexed manner in which the ſubjects have been handled; and ſtill more from another cauſe, namely, That the authors themſelves were totally unacquainted with the practical part of the arts they wrote upon. Theory without experiment will ever be liable to error. To obviate theſe objections is the deſign and intention of this Work. Particular attention has been paid to render perfectly clear and eaſy every thing it contains; and the

the Editor's own private experiments have repeatedly confirmed the truth of every thing it advances. The beſt authors have been conſulted; and neither pains nor expence have been ſpared to render the whole worthy the encouragement and patronage of the public.



CONTENTS

TO THE

Miſcellaneous Articles.

	Page
TO lay gold on white earthen ware	1
To ſilver looking-glaſſes	3
To foilate glaſs globes	5
To ſilver the convex ſide of meniſcus glaſſes for mirrors	7
To lay paper prints on the inſide of glaſs globes	ib.
To take impreſſions from medals on plaſter of Paris	8
To prepare plaſter ſo as to take a brimſtone or wax impreſſion from it	9
To caſt brimſtone, and give it a metallic gloſs	ib.
To make ditto red or green, and caſt it into molds like marble	10
To chooſe plaſter of Paris	11
Of colouring plaſter	ib.
Of laying mezzotinto prints upon glaſs	ib.
Colours proper for painting on glaſs	12
Method of uſing ditto	13
To waſh any powder very fine for colours	14
To make the beſt drying oil	ib.
To make turpentine varniſh for prints on glaſs	ib.
To make maſtic do. for do.	15
Inſtructions for the improvement of youth in the art of drawing	ib.
Implements neceſſary for drawing	17
Of the precepts of drawing in general	18
Of particular obſervations in the art of drawing	20
Leſſon I. Of drawing the introductory lines	22
Leſſon II. Of profiles and ovals	ib.
Leſſon III. Of whole figures, with the proportions of the human body	24
Of the proportions and dimenſions of the ſeveral parts of the human body	ib.
The proportion of the human body divided into eight heads	ib.
Ten heads	25
Leſſon IV. Of drapery	26
Leſſon V. Of light and ſhade	28
To take a perfect draught of a picture	29
To make camp paper	31
The method of enlarging and contracting	ib.
The method of etching copperplates	32
The proper inſtruments and materials uſed in etching	ib.

To

	Page
To make ſoft varniſh for etching	34
Method of applying the ſoft varniſh to the plate	35
To make the hard varniſh for etching	37
To make the beſt ſoft wax for the borders of the plate	ib.
General directions for etching	ib.
Particular directions for etching	40
Of engraving	44
Of whetting and tempering the graver	ib.
Of holding the graver	45
Of laying the deſign upon the plate	46
Directions for engraving	ib.
Of mezzotinto ſcraping	48
Directions for laying the mezzotinto ground	49
The method of etching copperplates with aquatinta	51
Crayon-painting	52
Of drapery	63
The materials of crayons	66
Reds. Carmine and lake	67
Lake	69
Vermillion	ib.
Blues. Pruſſian blues, blue verditer	70
Greens	71
Yellows	72
King's yellow	ib.
Orange	ib.
Browns. Cullen's earth	ib.
Umber	73
Purples	ib.
Blacks. Lamp black	ib.
Of rolling the crayons, and diſpoſing them for painting	75
Two methods to make gum-water	76
To make liquid gold for vellum painting	77
To make liquid ſilver for the ſame purpoſe	ib.
To make glare of eggs	ib.
Colours proper for waſhing maps	78
To keep the colours from ſinking	ib.
To make ſize for painting ſcenes, and other candle-light pieces	ib.
To make a compoſition to waſh braſs, ſo as to look like ſilver	79
To ſilver braſs, &c.	ib.
To make white varniſh for braſs	80
To make pulvis fulminaris, or thunder powder	80
To cleanſe mercury by aquafortis	81
To refine mercury if mixed with other metals	ib.
A general deſcription of making thermometers	82
How to fill a tube with mercury	ib.
To make ſilver ſolder	83
Another for coarſer ſilver	84
A ſolder for gold	ib.
The method of ſoldering gold or ſilver	ib.
To cleanſe ſilver after it is ſoldered	ib.
A ſolder for lead	85
Ditto for tin	ib.
Ditto for iron	ib.
A cement for turners	ib.
Another, finer than the laſt	86
A cement for broken pots, glaſſes, &c.	ib.
A ſtrong cement for electrical purpoſes	ib.
Another, ſofter than the former	87
A cement for glaſs-grinders	ib.

	Page
A cement for ſmall work	87
A cement, or glue, that will hold very ſtrongly, either againſt heat or moiſture	88
A good glue for ſign-boards, or any thing that muſt ſtand the weather	ib.
To make a fine glue, wherewith you may caſt curious medals	88
To ſtain wood red, blue, yellow, black, or green	ib.
Blue ink	89
A good common ink	90
A compoſition for ornaments	ib.
To prove ſpirits of wine, whether they are fit for varniſh	91
To make ſeed lac varniſh	ib.
To make ſhell lac varniſh	ib.
To make a laquer for braſs	92
To caſt vegetables, inſects, &c. in plaſter moulds	ib.
To prepare a metal for the above work	93
To caſt convex or concave moulds of medals on tin-foil with plaſter of Paris	ib.
Chemical tranſcolourations	94
Colours produced by the mixture of colourleſs fluids	ib.
Ditto, by coloured fluids	ib.
Ditto, changed and reſtored	96
Sympathetic inks	97
Directions for making the beſt compoſitions for ſpeculums	99
Of rough grinding the ſpeculum	101
The manner of forming the braſs grinding tool	102
How to form the bed of hones	103
The manner of forming the bruiſer	ib.
Of grinding the ſpeculum, the braſs tool, and the bruiſer together	104
The manner of figuring metal upon the hones	106
How to poliſh the ſpeculum	111
How to give a parabolic figure to the metals	135
To try the figure of the metal	137
Mr. Edwards's compoſition	150
The manner of caſting this metal	152
Of rough-grinding and figuring the ſpeculum	154
Of poliſhing the metal, and giving it the true parabolic figure	156
Magnetiſm	161
Two methods of communicating magnetiſm to iron or ſteel	162
To produce fire from two cold liquors	168
To make alum phoſphorus	169
The phoſphorus of urine	170
Phoſphorus of lime	172
Objects for the microſcope	173

REFERENCES TO THE PLATES.

Plate 1	to face the Title
2	to face page 29
3	42
4	71
5	74
6	85
7	109
8	116
9	150
10	168
11	181
12	192
13	208
14	220
15	235
16	251
17	267
18	278
19	297
20	323

MISCELLANEOUS PLATES.

Plate 1	to face page 23
2	24
3	25
4	81



CURIOUS

AND

ENTERTAINING

MISCELLANEOUS ARTICLES.

Of laying Gold upon White Earthen Ware.

TAKE japanners gold ſize of the beſt ſort one ounce, which keep in a bottle well corked; the ſame quantity of oil of turpentine, and a book of leaf-gold; then with two or three camel-hair pencils, you will be ready for the work. All theſe materials may be had at any principal colour-ſhop.

Being thus provided with every thing neceſſary, proceed to work after the following manner:

1. Pour out of the gold ſize bottle, about a ſmall teaſpoonful into a ſhell, or cup, then with the pencil lay the ground of your deſign upon the pot; but obſerve to keep moiſtening the gold ſize gradually with the pencil out of the turpentine bottle; for the gold ſize being expoſed to the open air, ſoon grows too thick for uſe.

A little experience will make it quite eaſy to be underſtood. When the ground is laid according to the deſign, ſet the pot in a clean place to dry leiſurely for the ſpace of one hour, then place it as near the fire as you can but juſt endure the heat with your hand for about four ſeconds of time. In this ſituation let it remain until, by preſſing your finger upon the ground, and taking it ſuddenly off, it will give a ring, then lay the gold on (as directed below) and it will look like burniſhed gold; then with the pencil and gold ſize touch the places you would have ſhadowed, and it is ready to be baked in an oven for two hours: after which it will bear waſhing, and continue bright many years.

This experiment will ſucceed very well upon glaſſes which have figures or ornaments of any kind ground upon them; ſuch as decanters, pints, wine-glaſſes, &c. The proceſs of laying on the ſize and gold, is the ſame as for pots; only obſerve, when you lay the gold on, not to preſs it too hard, for fear of breaking the glaſs, which I have ſometimes done before I was well acquainted with the preſſure it would bear; for glaſs is exceeding tender when ground deep. Obſerve, when you lay the ſize on, that you do not daub it upon the poliſhed ſurface of the glaſs; if you do, the work will not look neat; for if the glaſs has a bad figure ground upon it, it will be impoſſible for you to make any amendment. Be careful to lay the ſize on even, after which, put the glaſs in a tin oven before the fire, till by touching the ſize with your finger, and ſuddenly taking it off again, the veſſel will ring as before mentioned, and then it is ready for laying on the gold; in doing of which, I have tried ſeveral methods, but ſhall only mention two, and leave it

to

BRITISH MUSEUM 15 61 NOV

to your choice to follow which you like, or make further improvement.

Firſt, I took a book of leaf gold, and laid it on the table, then carefully took from the book one of the leaves of paper, and rubbed one ſide of it upon my forehead, which gave it ſuch a clammy moiſture, that when I laid it upon the leaf of gold in the book, and gently ſtroked it over, the gold adhered to it, ſo that I could cut it along with the paper into as narrow ſhreds as I pleaſed, for the ſtalks of flowers, &c. likewiſe into ſquares of every dimenſion; I then took ſuch pieces as ſuited me, and laid them upon the ſize (it being in proper order) and gave them a gentle preſſure with my finger, in order to faſten them until ſuch time as I threw the papers away, and gathered up a piece of cotton-wool, with which I preſſed them all over, continuing the ſame operations until the whole was completed, then wiped off the ſuperfluous gold, and ſhadowed the ornaments in their proper places, putting it into an oven to bake two or three hours, and the work was finiſhed.

I practiſed the above method for ſome time, but experience ſoon convinced me that the face of the gold had not that bright luſtre which it ought to have had; I therefore procured a cuſhion, and with a knife cut the gold to the dimenſions wanted, and with a piece of cotton-wool, took it from off the cuſhion, and laid it on the glaſs; and this ſucceeded to my ſatisfaction.

How to ſilver Looking-Glaſſes.

IN order to go completely forward, you muſt be prepared with the following articles, viz.

1ſt. A ſquare marble ſlab, or ſmooth ſtone, well poliſhed and ground exceeding true, the larger the better, with a frame round it, or a groove cut in its edges, to keep the ſuperfluous mercury from running off. 2d. Lead weights covered with cloth, to keep them from ſcratching the glaſs, from 1 pound weight to 12 pounds each, according to the ſize of the glaſs which is laid down, 3d. Rolls of tinfoil. 4th. Mercury, or quick-ſilver, with which you muſt be well provided, then proceed as follows:

Cut your tinfoil a little larger than your glaſs every way, and lay it flat upon the ſtone, and with a ſtraight piece of hard wood, about threee inches long, ſtroke it every way, that there be no creaſes or wrinkles in it, then drop a little mercury upon it, and with a piece of cotton-wool or hare's foot, ſpread it all over the foil, ſo that every part may be touched with the mercury. (Now here obſerve, that the marble ſlab be nearly level with the horizon) then pour on the mercury all over the foil, and cover it with a fine paper, and lay two weights very near its loweſt end or ſide, to keep your glaſs ſteady, while you draw your paper from betwixt the ſilvered foil and the glaſs, which muſt be laid upon the paper. As you draw the paper, you muſt take care that no air-bubbles be left, for they will always appear if left in at the firſt; you muſt likewiſe be ſure to make the glaſs as clean as poſſible on the ſide intended to be ſilvered, and have the paper alſo quite clean, otherwiſe when you have drawn the paper from under it, dull white ſtreaks will appear, which are very diſagreeable.

After the paper is drawn out, place as many weights upon the glaſs as you conveniently can, in order to preſs out the ſuperfluous mercury, and make the foil adhere to the

the glaſs. When it has lain ſix or ſeven hours in this ſituation, raiſe the ſtone about two or three inches at its higheſt end, that as much of the mercury may run off as poſſible; let it remain two days before you venture to take it up; but before you take the weights off, gently bruſh the edges of the glaſs, that no mercury may adhere to them; then take it up, and turn it directly over with its face ſide downward, and raiſe it by degrees, that the mercury may not drip off too ſuddenly; for if when taken up it is immediately ſet perpendicular, air will get in between the foil and the glaſs at the top, as the mercury deſcends to the bottom; by which means, if you be not exceedingly careful, your labour will be loſt. A very little practice, ſtrictly obſerving the above rules, will ſoon encourage the young artiſt to purſue this pleaſing experiment with pleaſure and profit.

Another method, and which I prefer, is to ſlide the glaſs over the foil without the aſſiſtance of paper, as directed for ſilvering meniſcus glaſſes.

I would adviſe at the firſt, to begin with ſmall glaſſes, and ſo proceed to larger ones by degrees.

To foilate Glaſs Globes.

TAKE half an ounce of clean lead, and melt it with an equal weight of pure tin; then immediately add half an ounce of biſmuth, and carefully ſkim off the droſs, then remove the lead from the fire, and before the mixture grows cold, add five ounces of mercury, and ſtir the whole well together; then put the fluid amalgam into a clean glaſs, and it is fit for uſe.

When

When this amalgam is uſed for foiling or ſilvering, let it firſt be ſtrained through a linen rag; then gently pour ſome ounces thereof into the globe intended to be foiled; the mixture ſhould be poured into the globe, by means of a glaſs or paper funnel, reaching almoſt to the bottom of the globe, to prevent its ſplaſhing to the ſides, then dexterouſly inclining (though very ſlowly) the globe every way, in order to faſten the ſilvering: when this is once done, let the globe reſt ſome hours; then repeat the operation till at length the fluid maſs is ſpread even, and fixed over the whole internal ſurface; as it may be known to be by viewing the globe againſt the light; and then the ſuperfluous amalgam may be poured out, and the outſide of the globe cleared, and the operation is ended.

In this manner are made thoſe ſhining ſpherical globes, appearing like glaſſes filled with quickſilver, which we ſee hung up in parlours, near the ceiling, to invite the flies in ſummer from the windows, and other parts of the room, where they might prove more offenſive.

The operator has conſiderable advantages, as it can be performed without heat; and is not attended with the danger of poiſonous fumes from arſenic, or other unwholeſome matters, uſually employed for this purpoſe; and how far it is applicable to the more commodious foiling of the common looking-glaſſes and other ſpeculums, may deſerve to be conſidered. I have tried it on ſeveral irregular ſurfaces, and it has anſwered exceeding well.

How

How to ſilver the Convex Side of Meniſcus Glaſſes for Mirrors.

TAKE an earthen plate, on which pour ſome prepared plaſter of Paris, mixed with water, of a proper conſiſtence; then immediately before it grows too ſtiff, lay your meniſcus with its convex ſide downward, in the middle of the plate, and preſs it until it lies quite cloſe to the plaſter; in which ſituation let it remain until the plaſter becomes quite dry; after which, work a groove with your finger round the outſide of the meniſcus, in order to let the ſuperfluous mercury reſt upon it; then cut the tinfoil to a proper ſize, and preſs it with the meniſcus into the plaſter mould, in order to make it lie cloſe; after which, cover it with the mercury, and without a paper (as directed for ſilvering plain mirrors) ſlide it over the ſilvered foil; then place a weight on it, and let it ſtand two or three days, raiſing it by degrees, that the mercury may drip off gradually, and you will find it anſwer your expectation.

After this method, common window glaſs, &c. may be ſilvered.

To lay Paper Prints on the inſide of Glaſs Globes.

FIRST, cut off all the white part of your impreſſion, ſo that nothing appear but the print; then prepare ſome ſtrong gum arabic water, or ſize, with which you muſt bruſh over the face ſide; after which put it into the globe, and with a long ſmall ſtick, on which a camel-hair pencil is fixed, ſtick it even on, and by this method you may put what quantity of prints you pleaſe into

into the globe; let them dry about twelve hours, then pour ſome prepared plaſter of Paris, either white or tinged, whatſoever colour you pleaſe, and turn the globe eaſily about, ſo that every part be covered, then pour out the ſuperfluous plaſter, and it is finiſhed.

How to take Impreſſions from Medals, &c. in Plaſter of Paris.

AFTER having oiled the ſurface of your mould gently with a little cotton, or a camel-hair pencil dipped in oil of olives, put a hoop of paper round it, exactly to the thickneſs you would chuſe your impreſſion to be made: then take ſome prepared plaſter of Paris in a tea-cup or baſon, according to the quantity wanted to be at that time uſed, and ſome fair water, to the conſiſtence of a very thick cream, and with a bruſh rub over the ſurface of the mould, and immediately afterwards make it to a ſufficient thickneſs; for rubbing the ſurface entirely prevents any air-holes from appearing on the impreſſion. Let it ſtand about half an hour, and it will in that time grow ſo hard, that you may very ſafely take it off; then pare it ſmooth on the back, and neatly round the edges, and it is done. It ſhould be dried, if in cold or damp weather, before a briſk fire. In this operation, when you have made the impreſſions to a proper thickneſs, you ſhould, while they are wet in the moulds, ſprinkle them with ſome of the powder, which makes them conſiderably harder, and dry ſooner. If you cover the face of the mould with fine plaſter, a coarſer ſort will do to fill it up with, and be a conſiderable ſaving; but I would alſo

adviſe

adviſe you not to mix more plaſter at one time than what you immediately want, becauſe it will be apt to thicken too ſoon, and ſo the ſuperfluous quantity will be loſt (until it be burnt again, and go thro' the ſame operation as when at firſt prepared); for adding water to it to thin it, will quite prevent it from ever ſetting hard a ſecond time, without burning it afreſh.

To prepare a Plaſter Mould, ſo as to take a Brimſtone or Wax Impreſſion from it.

LET your plaſter-mould be quite dry, then dip it in the following mixture, viz.

Take half a pint of boiled linſeed oil, and ſpirit of turpentine one ounce; mix them together in a bottle: when wanted, pour the mixture into a plate or ſaucer, and dip the ſurface of your mould into it; take your mould out again, and when it has ſucked up the oil, dip it again. Repeat this till the oil begins to ſtagnate upon it; then take a little cotton wool, hard rolled up, to prevent the oil from ſticking to it, and wipe it carefully off: lay it in a dry place for a day or two (if longer the better) and the mould will acquire a very hard ſurface from the effect of the oil. When uſed, it muſt be oiled with oil of olives in the ſame manner as before directed.

How to caſt Brimſtone, and give it a Metallic Gloſs.

TAKE ſome ſtone brimſtone, melt it in an iron ladle over the fire, let it flame for about five or ſix minutes,

then take it off, and with a piece of board extinguiſh the flame, and let it cool a little ſo as not to feel like glue, or run ropy, it is then proper for uſe; and you may pour it into your mould, in which let it ſtand five or ſix minutes, and you may take it off; pare it as before, and rub the ſurface of the impreſſion over with ſome cotton and the beſt powder of black lead; which will give it a very fine metallic gloſs.

How to make Sulphur Red or Green, and caſt it in Moulds like Marble.

TAKE two ounces of beſt clean ſtone brimſtone, and melt it ſlowly over a gentle fire, without letting it flame; when it is melted add one ounce of vermillion, ſtir them well together, then pour the compoſition over the ſurface of your mould, and immediately pour it off again, and fill the mould up to a proper thickneſs with common brimſtone; let it ſtand the ſame time as before mentioned, then pare and rub over the ſurface with ſome clean cotton, which will give it a poliſh; the more impreſſions you can make at once melting, the better, becauſe the brightneſs of the red fades the oftener it is melted. It may be made green by uſing it in the ſame manner, and by adding the ſame quantity of the beſt ſmalt inſtead of vermillion; only it requires more ſtirring to mix it properly. It may alſo be made to imitate a beautiful marble, by mixing ſeveral colours ſeparately, and made in ſmall ſquares of equal ſizes, which break into exact lengths, and diſpoſe them according to your fancy, endwiſe, in an iron frame that will open with a joint; after which, melt them together, and the colours will unite in a pleaſing manner, and each will appear diſtinct. When you melt it, be careful not to ſhake it, and let it cool by degrees.

How

How to chuſe Plaſter.

IT is beſt to chuſe plaſter in ſtone, the fineſt and cleareſt parts only; for if you have it in powder, it is not to be depended on ſo well. Take great care that it may be very well burnt, and well pounded; alſo very white, and ſifted through a fine tiffany; then it may be laid up in a box for uſe. In London this precaution is unneceſſary, becauſe it may be procured good (according to the price) of the dealers in this article.

Of colouring Plaſter.

PLASTER of Paris may be tinged with ſeveral colours when you are caſting, by mixing it with Pruſſian blue, red lead, orpiment, &c. with which you may compoſe a blue, red, yellow, and green; and it has a very good effect when the raiſed part is white, red, &c. and the ground of another colour. But it is to be obſerved, that the coloured impreſſions take a longer time in becoming hard than when the plaſter is unmixed. But if you ſift ſome plaſter upon the top of your caſt (when it happens to be a flat figure) it will ſet the ſooner, and the ſuperfluous part may be pared off when thoroughly dried.

To lay Mezzotinto Prints upon Glaſs.

PROVIDE a clear plate of glaſs, as ſtraight as poſſible, a little larger than the print, then ſteep the print, flat way, in warm water about an hour, and with a thin knife, ſpread Venice turpentine, or varniſh, exceeding

thin and even over one ſide of the glaſs, which muſt be kept warm, that the turpentine may ſpread the better; and obſerve that there be not the leaſt ſpeck of the glaſs uncovered with the turpentine: then take the print out of the water, and lay it on a ſmooth table between two cloths, or ſeveral folds of paper, in order to take out the ſuperfluous water. When this is done, lay the print on the glaſs by degrees, beginning at one end, and ſtroke outward that part which is faſtened to the glaſs, that no wind or water may lie betwixt, as it will cauſe bliſters; which you muſt be careful to ſtroke out. The print being laid upon the glaſs in the moſt exact manner, proceed to rub it with your finger until all the thickneſs of the paper is come off in little rolls, and nothing is left on the glaſs but a thin film, like a ſpider's web, that is faſt ſtuck to the glaſs by the turpentine, &c. great care muſt be taken in rubbing, that no holes are made in the print, eſpecially in the lights, which are the moſt tender parts. If the print be large, ſo that ſome parts of the paper become dry while you are rubbing the other, you ſhould, with a little water on your finger, wet them as you ſee occaſion, to keep them moiſt; for the paper will not rub when dry. When you have rubbed the paper till it appears tranſparent on the back, ſet it up to dry for three or four hours; after which varniſh it over with turpentine or maſtic varniſh, two or three times, or till you ſee it tranſparent; and after it has ſtood a day or two to dry, proceed to paint it.

Colours proper for painting upon Glaſs,

ARE beſt procured at colour-ſhops, prepared in little bladders on purpoſe, viz. flake white, lamp black, umber, vermillion,

vermillion, maſticote, Pruſſian blue, verdigreaſe, &c. Ultrarmine (for blue) and carmine (for red) are beſt kept in powder, as being leaſt liable to waſte in that ſtate; and when wanted for uſe, a ſmall quantity may be mixed up with a drop or two of nut oil with your pallet knife.

To get the colours out of the bladders, prick a ſmall hole near the bottom, and preſs it until you have enough for your preſent uſe, becauſe the colours are apt to dry and ſkim over.

With theſe colours you may exactly imitate any colour whatſoever, by different ways and methods of mixing, according to your fancy.

The Method of uſing the Colours.

As the lights and ſhades of your print open, lay the lighter colours firſt, on the lighter parts of your print, and the darker over the ſhaded parts; and having once laid on the brighter colours, it is not material if the darker ſorts are laid a little over them; for the firſt colour will hide thoſe laid on afterwards.

When any colours are too ſtrong, they may be lightened to any degree by mixing white with them on your pallet; or you may darken them as much as you pleaſe, by mixing them with a deeper ſhade of the ſame colour.

The colours muſt not be laid on too thick; but if troubleſome, thin them before you uſe them with a little oil of turpentine.

Take

Take care to have a pencil for each colour; and never uſe that which you have uſed for green with any other colour, without firſt waſhing it well with oil of turpentine, as that colour is apt to appear predominant when the colours are dry.

Waſh all the pencils after uſing, in oil of turpentine.

To waſh any Powder very fine for Colours,

YOU muſt have four or five large wine glaſſes by you, and two or three quarts of clear water. Fill one of your glaſſes with it, and put in half an ounce of the colour you intend to waſh; ſtir it well about with a knife, and permit it to ſtand about ten ſeconds of time, in order to let the gritty parts ſettle to the bottom before you pour it into another glaſs, in which let it remain until the next day, when it will be quite ſettled, then pour off the water, and the powder will be left very fine, which dry, and paper up for uſe; but ſome powders will require a longer time to ſettle, therefore muſt be treated accordingly.

To make the beſt drying Oil.

MIX a little lytharge of gold with linſeed oil, boil it over a ſlow fire, but not too much, leſt it ſhould prove over thick, and be unſerviceable.

To make Turpentine Varniſh for the above Prints.

PUT one ounce of Venice turpentine in an earthen pot, place it over a ſlow fire, and when it is diſſolved, add

add two ounces of oil of turpentine; as ſoon as they boil take off the pot, and when the varniſh is cool, keep it in a glaſs bottle; this and all other varniſhes ought to be ſtopped cloſe up, and well ſecured from the air. With this you may varniſh prints on glaſs or other things, to render them tranſparent: if the varniſh ſhould be too thick, you may thin it with the addition of a little oil of turpentine; if too thin, add a little more Venice turpentine.

To make Maſtic Varniſh for the above Prints.

TAKE two ounces of the cleareſt gum maſtic you can chooſe, powder it finely, and put it in a bottle with ſix ounces of oil of turpentine, ſtop the bottle cloſe, and ſhake them well together till they are well incorporated. Then hang the bottle in a veſſel of boiling water for half an hour, during which ſhake it three or four times; if you would have it ſtronger let it boil a quarter of an hour more, and it will be fit for uſe.

If it ſhould not happen to ſuit your convenience to mix and prepare the colours, varniſhes, &c. yourſelf, they may be had ready for uſe at the colour-ſhops in any quantity.

Inſtructions for the Improvement of Youth in the Art of Drawing.

AS the art of drawing is not only an innocent and uſeful amuſement for youth, but a qualification highly expedient, if not abſolutely neceſſary; to render the ſtudy and practice of it eaſy and entertaining, will be eſteemed an acceptable ſervice to the public.

Not

Not that this or any other book of the like nature (however correct) is a ſufficient guide of itſelf; for this accompliſhment (like other arts) can never be perfectly acquired without patience and induſtry.

The young practitioner muſt be brought forwards by proper gradations: the outlines of a figure muſt be his firſt care (as the platform muſt be firſt laid, before the building can be erected); and he muſt be content to copy parts of objects before he indulges his curioſity too far, and makes the leaſt attempt at a finiſhed piece. But what he will find here, carefully obſerved, will be the beſt direction for his future progreſs.

He muſt not be too hot or eager after new tranſitions from one place to another, but muſt dwell upon each, and never begin a ſecond till he has in ſome meaſure made himſelf maſter of the firſt.

He muſt further (if he is curious, and aims at any degree of perfection) be very ſlow in his firſt operations. Haſte ſeldom produces any thing beautiful or correct; and ill habits, when once contracted, are the moſt difficult things in nature to be removed.

He cannot look too often on his original; and the length, breadth, and ſimilitude of each object before him will require his utmoſt attention and obſervance. And when once he is able, by care and application, to touch up a piece with any tolerable beauty, practice in a ſhort time will make him expeditious, and render his labours advantageous and delightful.

Implements

Implements neceſſary for Drawing.

THE implements neceſſary for drawing are compaſſes, charcoal, ruler, black and red lead pencils, penknife, port crayons, black, white, and red chalk, crayons, Indian ink, crow-quill pens, camel-hair pencils, fitches, paper of ſeveral ſorts, &c.

Charcoal is to be choſen of ſallow wood, ſplit into the form of pencils, ſharpened to a point; its uſe is to draw lightly the deſign over at firſt, that if any part be amiſs, it may be wiped out and amended. Feathers ought to be of a duck's wing, on account of their ſtiffneſs (though others may ſerve well enough) with which you may wipe out any ſtroke of the charcoal where it is drawn amiſs, leſt variety of lines breed confuſion. Black and red lead pencils are to go over your draught the ſecond time more exactly, becauſe the lead will not wipe out with your hand when you come to draw with the pen. Pens made of raven or crow-quills (but others may ſerve) are to finiſh the work: here you muſt be very careful and exact, for what is now done amiſs cannot be altered. Rulers are to draw ſtraight or perpendicular lines, triangles, ſquares, or polygons, which you are to uſe in the beginning, till practice and experience may render them needleſs. Compaſſes with ſteel points, to take in and out, that you may uſe black or red lead at pleaſure; their uſe is firſt to meaſure (by help of a ſcale of equal parts upon the edge of your ruler) your proportions, and whether your work which is done with the charcoal is exact; alſo to draw circles, ovals, arches, &c.

Of the Precepts of Drawing in general.

HAVING all the neceſſaries above-mentioned in readineſs, it will be good to practiſe, as much as may be, without the help of your rule and compaſſes: it is your eye and fancy that ought to judge, without artificial meaſurings.

1. The firſt practice of drawing begins with plain geometrical figures; as lines, angles, triangles, quadrangles, polygons, arches, circles, ovals, cones, cylinders, and the like; for theſe are the foundation of drawing. The circle aſſiſts in all orbicular forms; as in the ſun, moon, &c.: the oval in giving a juſt proportion to the face and mouth, the mouth of a pot or well, the foot of a glaſs, &c.: the ſquare confines the picture you are to copy, &c.: the triangle in the half face: the polygon in ground-plans, fortifications, &c.: angles and arches in perſpective: the cone in ſpires, tops of towers, and ſteeples: the cylinder in columns, pillars, pilaſters, and their ornaments. Having made your hand fit and ready in moſt general proportions, learn to give every object its due ſhade according to its convexity or concavity, and to elevate or depreſs the ſame as the object appears either nearer or farther off the light; which is indeed the life of the work.

2. The ſecond practice conſiſts in forming fruits; as apples, pears, cherries, peaches, grapes, ſtrawberries, with their leaves, &c.: the imitation of flowers; as roſes, tulips, carnations, &c.: herbs; as thyme, hyſſop, &c.: trees; as oak, fir, aſh, walnut, &c.

3. The third practice imitates, 1. Beaſts; as the lion, horſe, elephant, leopard, dog, &c. 2. Fowls; as the eagle, ſwan,

ſwan, parrot, partridge, dove, raven, &c. 3. Fiſhes; as the whale, herring, pike, carp, lobſter, crab, &c. of which variety of prints may be bought at reaſonable rates.

4. The fourth practice imitates the body of a man with all its lineaments; the head, noſe, eyes, ears, cheeks, hands, arms, and ſhadows, all exactly proportionable both to the whole and to another, as well in ſituation as magnitude.

5. The fifth practice is in drapery, imitating clothing, and artificially ſetting off the outward coverings, habit and ornaments of the body; as cloth, ſtuff, ſilk, and linen, with their natural and proper folds; which though it may ſeem ſomething hard to do, yet exerciſe and imitation of the choiceſt prints will make it eaſy.

In drawing all the foregoing forms, or whatever elſe, you muſt be perfect; firſt in the exact proportion; ſecondly, in the general or outward lines, before you fall to ſhadowing or trimming your work within. In mixed and uncertain forms, where the circle and ſquare will do no good, as in lions, horſes, &c. you muſt work by your own judgment, and ſo obtain the true proportion by daily practice: thus, having the ſhape of the thing in your mind, firſt draw it rudely with charcoal, and more exactly with your lead pencil; and then peruſe it well, and conſider where you have erred, and mend it according to the idea which you carry in your mind; this done, view it again, correcting by degrees the other parts, even to the leaſt jot, ſo far as your judgment will inform you. Having done what you can, compare it with ſome ex-

cellent pattern or print of the like kind, uſing neither rule nor compaſs, but your own reaſon, in mending every fault, giving every thing its due place and juſt proportion: by this means you may rectify all your errors, and ſtep an incredible way on to perfection.

Having good patterns and copies to draw by, the young artiſt muſt learn to alter them to other proportions, either greater or leſs; and this by many trials, as ſhall be taught hereafter more particularly.

Let the young artiſt now begin to exerciſe in drawing after the life (for that is the completeſt, beſt, and moſt perfect copy which nature has ſet for obſervation) wherein the liberty of imitation is preſented in the largeſt latitude; this will be attained by much practice and diligent exerciſe; but there ought to be a perfection in drawing before there can be the leaſt thoughts of colours or painting; for all things belonging to theſe will (in a ſhort time) be eaſily and perfectly underſtood.

Of particular Obſervations in the Art of Drawing.

IN drawing after a print or picture, put it in ſuch a light that the gloſs of the colours may not hinder your ſight, but ſo as that the light and your eye may both fall obliquely upon your piece; which place at ſuch a diſtance, that at opening your eyes, you may view it all at once; the greater your picture is, the farther off you muſt place it to draw after: which, ſet before you a little reclining. Then obſerve the middle of your picture to be copied, which touch upon your paper with the point of your charcoal: obſerve likewiſe the moſt perſpicuous and uppermoſt figures (if

more

more than one) which touch gently, in their proper places; thus running over the whole draught, you will ſee the ſkeleton, as it were, of the work.

But if you go on without conſidering whereunto your work will tend, you will be forced to draw the ſame many times over, and to as little purpoſe, if you are not exceeding careful; by which means your ingenuity may be dulled, and you decline all further progreſs.

Take particular care of obtaining a right and true draught, and do not be uneaſy becauſe you cannot go quickly forward; for what you think may be done in two or three hours, it will be better to beſtow two or three days upon: by this means (though you act leiſurely, yet you will act more prudently) and you will both ſooner and better attain the perfection of what you deſire.

We ſhall now proceed to the leſſons, in regard to which the learner is here particularly deſired to perfect himſelf in the practice of the firſt, in its ſeveral branches, before he attempts the ſecond; and in the ſecond, before he meddles with the third; not endeavouring to become maſter of the whole at once, which will only ſerve to perplex his ideas and make him grow weary in purſuit of what he will never by this means be likely to attain; whereas, by proceeding gradually from one leſſon to another, in the order they here ſtand, the rules will be found much more eaſy and practicable, and conſequently the ſtudy infinitely more pleaſing and engaging.

LESSON

LESSON I.

Of Drawing the Introductory Lines, with the Features and Limbs ſeparately.


FIRST endeavour to imitate perpendicular or upright lines, and then horizontal or parallel lines, but without uſing the ruler; if care be taken, a few examples of this ſort will do. When you can do this well, proceed to the curved lines, obſerving carefully their different inclinations; and when you can with eaſe perform theſe, proceed to draw the outlines of the features of a human face; as the eyes, noſe, mouth, and ears; and from them to the limbs or parts of the body, as the arms, hands, legs, feet, &c. they muſt be but faintly ſketched, ſo as to be eaſily rubbed down with bread or Indian rubber, in order to make the neceſſary alterations before finiſhing.

LESSON II.

Of Profiles and Ovals.

HAVING become maſter of the former, you may then, and not before, attempt the profile or ſide-face, being very careful to obſerve the proportion of the ſeveral parts to each other; after this the full or oval face, obſerving ſtill the bearings of every feature with reſpect to the reſt, and keeping the proportions as exact as poſſible. Divide the eye ſeen in the front into three parts; the center is the ſize of the ſight, and the proper opening of the eye, which is one third of its length. The eye in profile

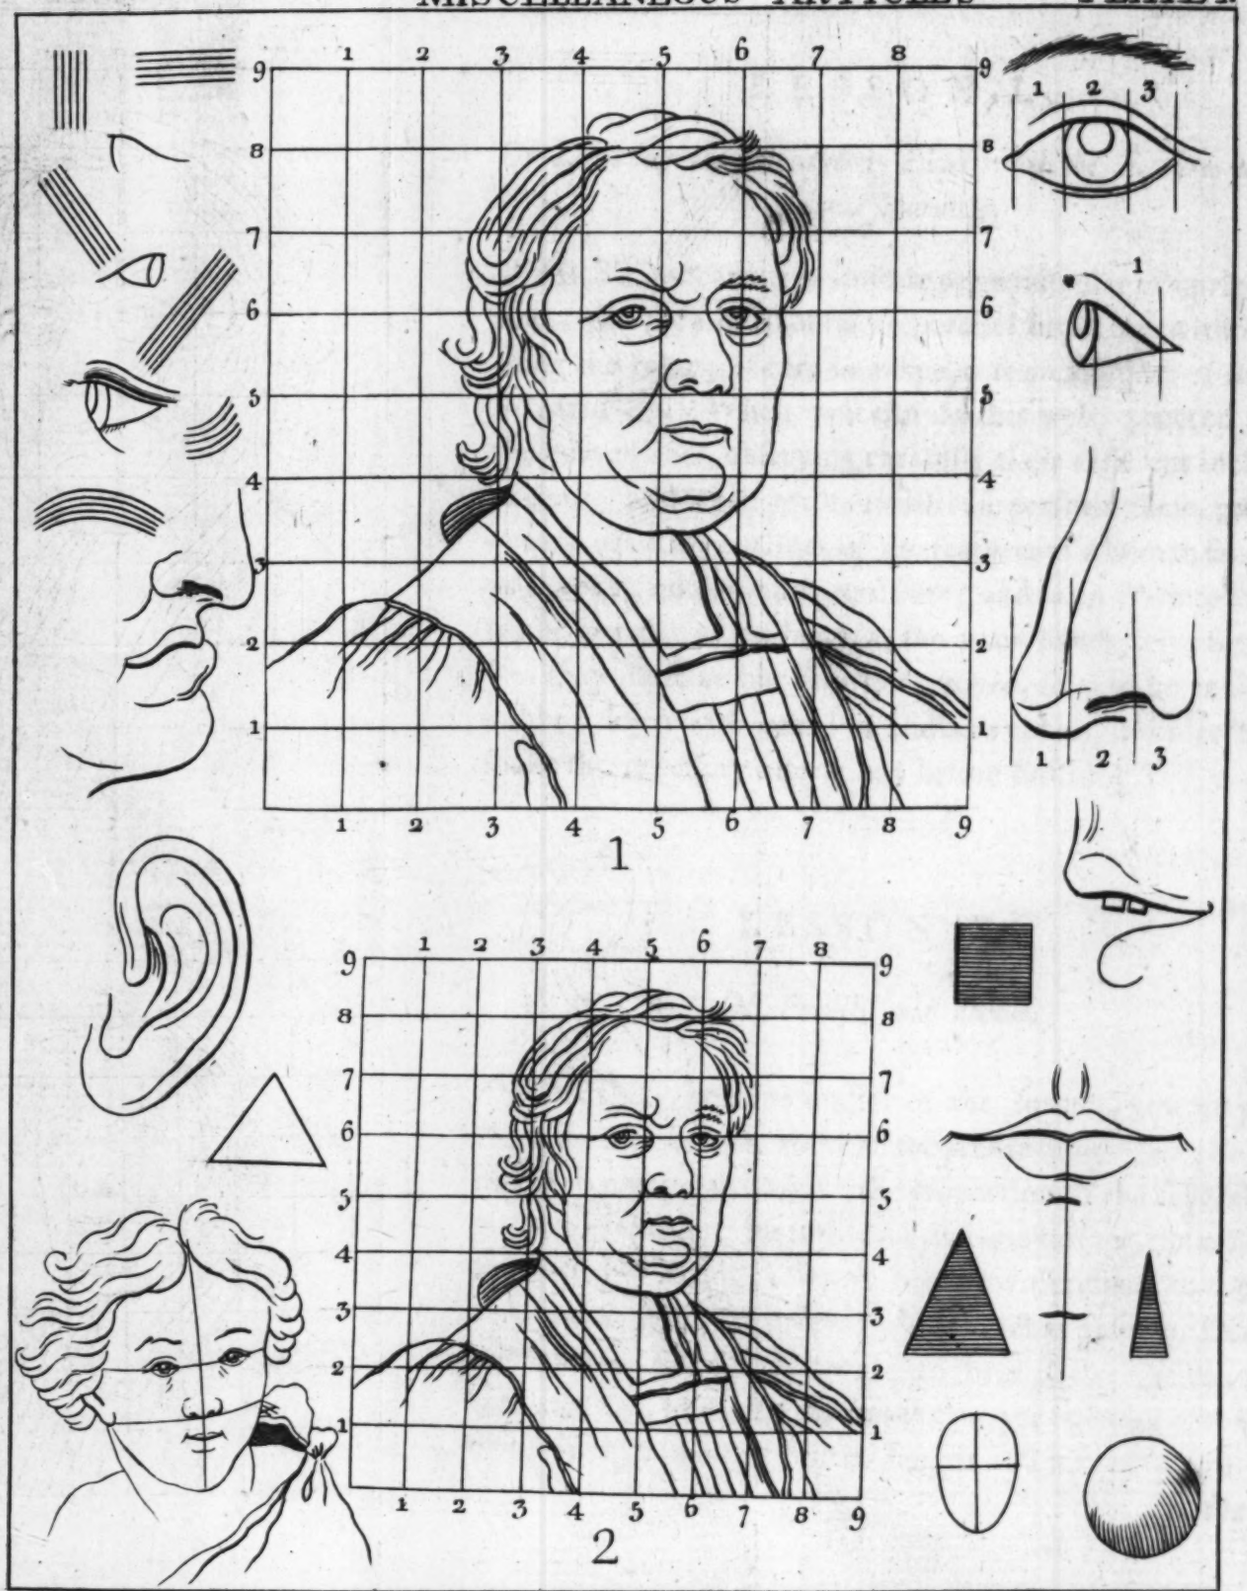


1
2
J. Lodge sc.

file is half the size of the eye in front, having only one part and an half. The nose seen in front is in width the length of the eye; and in profile has the same dimension. See Plate I.

The nostril is in height one-third of the width of the nose. After proceeding with great care in the above, you may begin the outline of the body.

LESSON III.

Of whole Figures, with the Proportions and Dimensions of the Human Body.

IF on examination you find yourself acquainted with, and can easily imitate the different features and parts of the body, you may then begin the figure in the following manner: sketch the whole very lightly with your pencil or charcoal, then examine the proportion of the different parts, rubbing down with Indian rubber, and altering where necessary; when you have brought it as near as possible to your original, proceed to finish the figure with the crow-quill pen and Indian ink, beginning with the head, next the shoulders, then the body, after which the arms and hands, then the hips, legs, and feet, taking care to correct in the finishing any errors in the pencil sketch, the remains of which will be easily rubbed out with Indian rubber. Use no compasses till after a very minute inspection with the eye, and then if the fault cannot be discovered, a proper application of them to the copy and original, will greatly assist the pupil in perfecting this branch.


The Proportions and Dimenſions of the ſeveral Parts of the Human Body.

THE beſt method of aſcertaining theſe, is to raiſe a perpendicular on the place you intend for the middle of the figure, and divide it into heads, and from ſuch menſuration form a ſcale, to regulate the proper diſtances from any one part of the body to another: but as it has been more common to divide the figure in ten parts, an example of both theſe, together with the following rules for the illuſtration of each reſpectively, are given.


The Proportion of the Human Body divided into Eight Heads. See Plate II.


THE length of the head (or firſt diviſion of the figure) is from the crown or top of the head to the bottom of the chin. A line ruled through the ſecond diviſion will directly croſs the paps of the breaſts. The third diviſion will fall a little above the navel. The fourth acroſs the privities, which is exactly the middle of the figure. The fifth croſſes the middle of the thigh. The ſixth is juſt below the bend of the knee. The ſeventh falls a little below the calf of the leg. And the eighth extends to the bottom of the heel. Obſerve, that when the arms are extended at full length in a direct line, the full extent from the end of the middle finger of the right hand to that of the left, is exactly the length of the figure: from the middle of the collar-bone to the end of the middle finger, is juſt four heads, viz. the firſt to the bend of the ſhoulder, the ſecond to the elbow, the third to the wriſt, and the fourth to the finger's end.

From

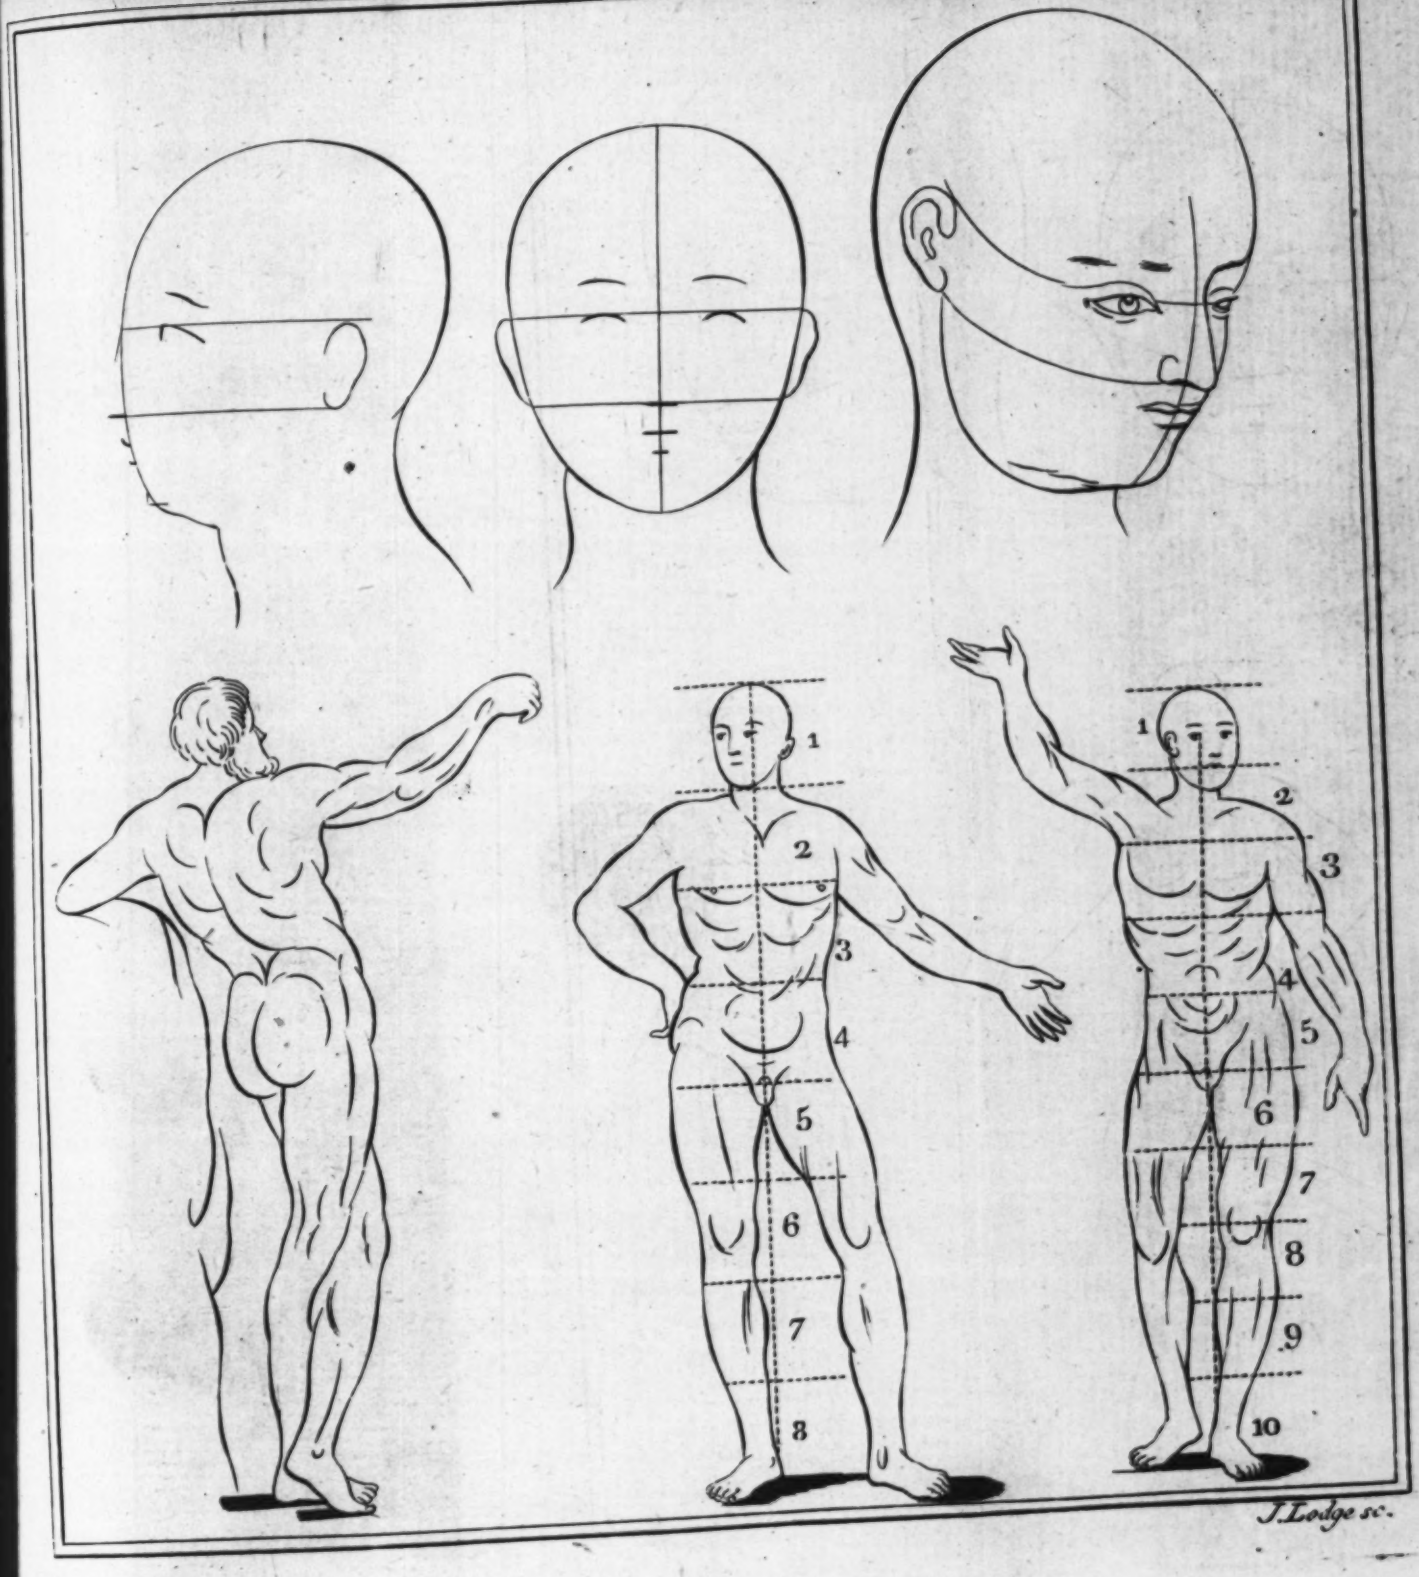
1
2
3
4
5
6
7
8
9
10
J. Lodge sc.


BRITISH MUSEUM
15
61
NOV

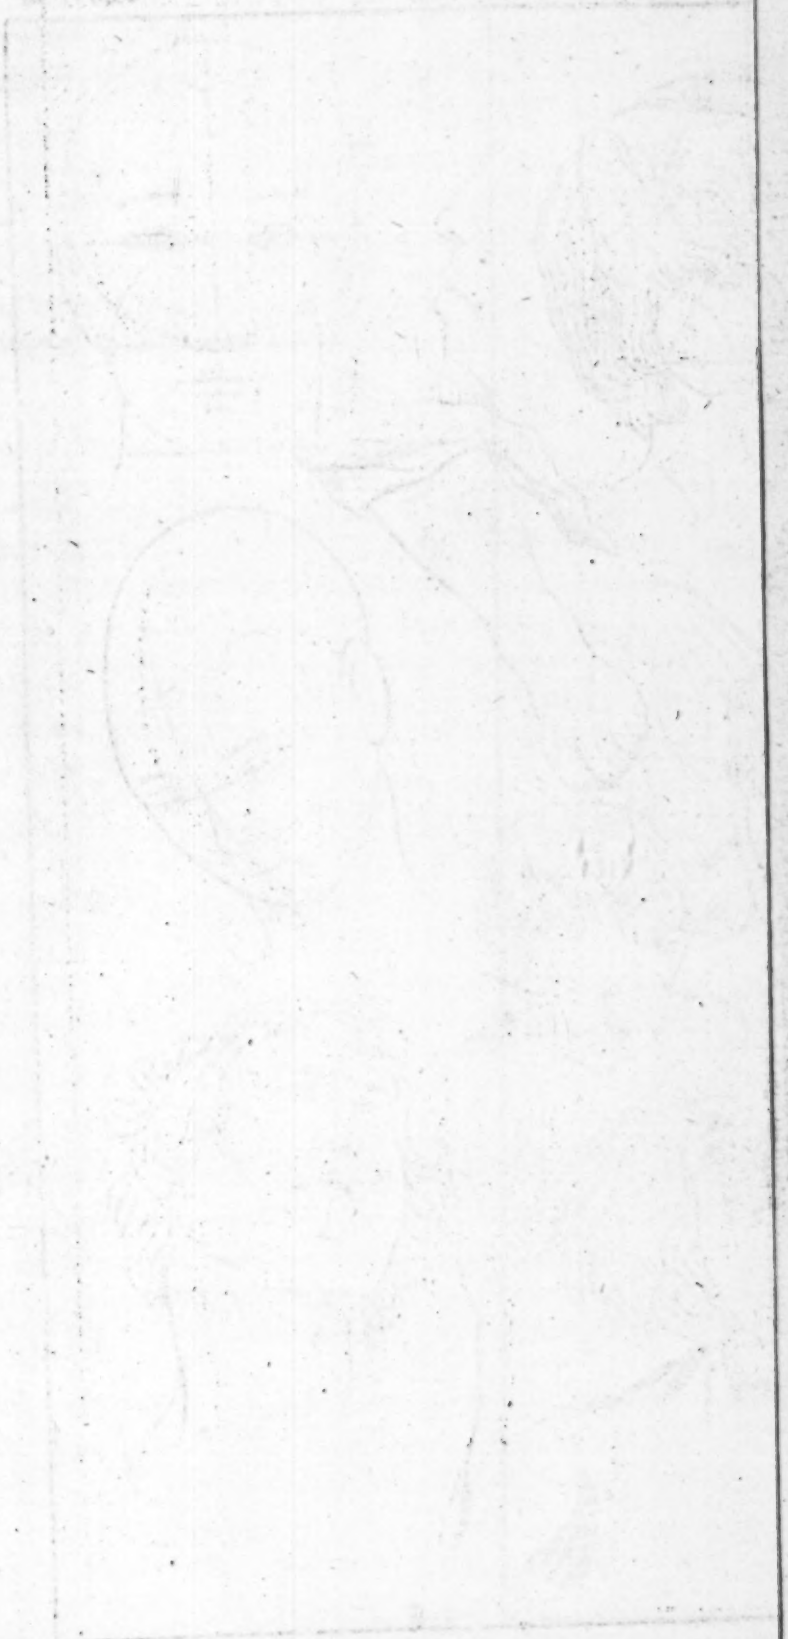

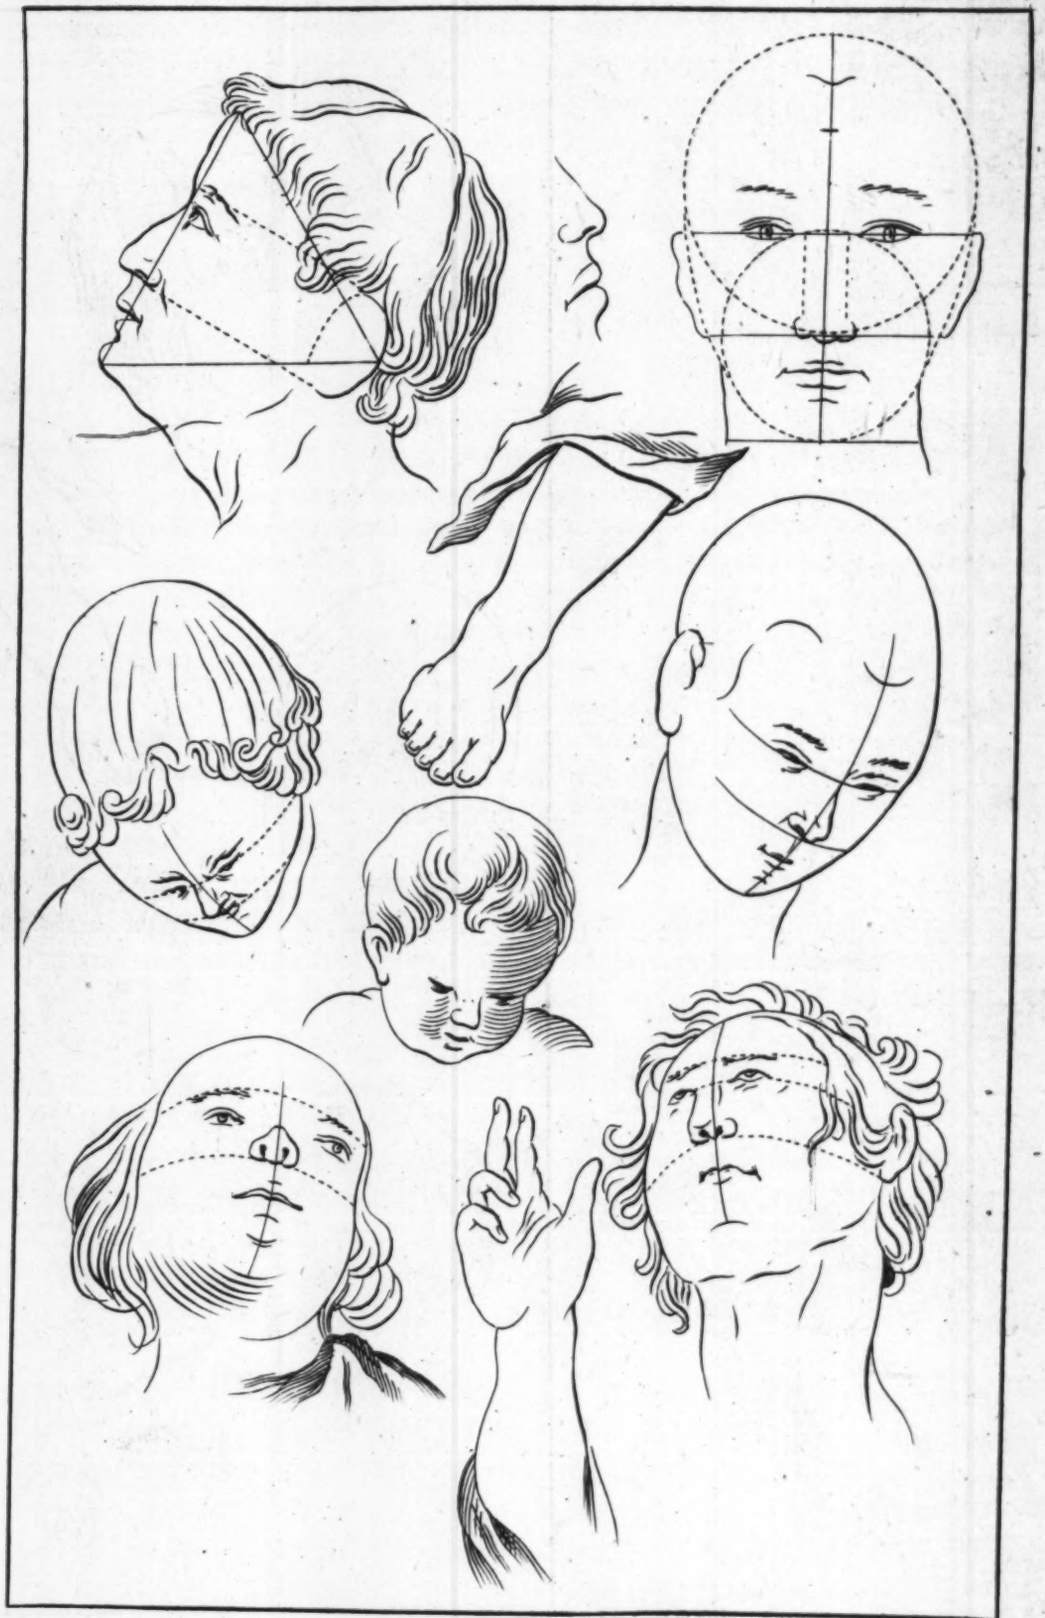

Lodge sc

From ſhoulder to ſhoulder, in a man of common ſize, meaſures exactly two heads: there can be no preciſe ſtandard for the breadth of the limbs, which vary according to the bulk of the perſons and the movement of the muſcles.

The Proportion of the Human Body, divided into Ten Heads. *See Plate* II.

The firſt of theſe diviſions extends from the crown of the head to the under lip: the ſecond, a little below the collar-bone; and a line drawn through this part of the figure, will paſs over the middle of the ſhoulder: the third diviſion will make a line juſt below the paps of the breaſt: the fourth, will reach juſt below the navel: the fifth, which is the middle of the figure, directly acroſs the privities: the ſixth will paſs over the middle of the thighs: the ſeventh croſſes the bend of the knee: the eighth, directly through the calves of the legs: the ninth reaches half way from the calf to the bottom of the heel, which determines the tenth and laſt diviſion of the figure.

As the pupil will find the foregoing rules of infinite advantage, it will be again neceſſary to adviſe him to make due application, till it become ſtrongly impreſſed on his mind, and they will enable him to judge of the productions of nature in the formation of the human body; but it is indiſpenſibly neceſſary that the pupil ſhould have ſome knowledge in anatomy, it being the fundamental part of the deſign, which enables him to diſcover the beauties of the antique; it would therefore be

neceſſary to recommend the ſtudent to pay ſome attention to it, as ſo much of it as is neceſſary for draftſmen is very eaſily attained.

LESSON IV.

Of Drapery.

HAVING drawn the outline of the figure you want to clothe, faintly with charcoal, whiſking out the faulty part with a feather, till the figure appear in the attitude and proportion of the original; ſketch the outline of your drapery lightly with the ſeveral folds, remembering that they muſt not croſs each other. Due regard muſt likewiſe be paid to the quality of the drapery, as ſtuffs and woollen cloth are more harſh than ſilk, which is always flowing and eaſy. Remember that the drapery muſt not ſtick too cloſe to the body, but let it ſeem to flow eaſy about it, and yet appear ſo that the motion of the figure be free and natural. Be careful that the drapery, ſuppoſed to be blown by a breeze of wind all flow one way, and draw the parts next the body before thoſe which fly off. The garments muſt always bend with the figure; and if you make the drapery almoſt cloſe to the body, the ſmaller muſt be the folds; and if quite cloſe, there muſt be no folds but only a faint ſhadow, to repreſent that part of the body which it covers. The ſtudent ſhould take every opportunity to improve in this uſeful branch, by remarking the folds as they appear in the drapery of gentlemen and ladies, according to the ſeveral poſitions. By following this unerring rule of nature, the learner will greatly heighten his own ideas, and ſoon attain perfection.

Thus

Thus far might ſerve to give the young draftſman a general idea of drapery; but that he may not be at a loſs in perfecting himſelf in this art, a few more general inſtructions may not be unneceſſary.

1. Be careful to avoid overcharging your figure with a ſuperfluity of drapery. 2. Let as much of the form of the body as poſſible be ſhewn underneath it. 3. When the draperies are large, throw them into as many folds as you can, and let theſe be large and graceful. 4. On the contrary, let thoſe which are cloſe to the body be looſened by ſmall folds judiciouſly placed; it will be the means of avoiding that ſtiffneſs which, for want of this caution, appears when the drapery is made to ſit too ſtrait, and makes the figure ſeem as if wrapped round with a bandage, inſtead of being gracefully clothed. 5. When much drapery is required, let the greater part, if poſſible, be thrown into ſhadow. 6. Obſerve that the folds which fall in the light muſt have ſuch ſoft and tender ſhadows as may make them ſit hollow from the body, and not ſeem to girt too cloſely to it. 7. Let the folds be properly contraſted, and avoid ſtrait lines as much as poſſible. 8. A judicious repetition of folds in a circular form, greatly contributes to characterize a fore-ſhortened limb. 9. In fixed attitudes let the drapery appear motionleſs, unleſs expoſed to air. But the drapery of figures moving with great agility, ſhould ſeem to play as if agitated by the wind, but in proportion only to the velocity of the figures in motion.

To conclude this part of the ſubject with one uſeful caution, viz. Let the pupil be careful how he ſtudies ſtatues, and remember that the beſt of them are only

memorials of thoſe great artiſts, whoſe lives were ſpent in endeavouring to expreſs their own idea of perfection, which varied according to the different taſte of each, and the nature of the materials upon which they wrought: and let it likewiſe be remembered, that there is a ſtiffneſs which ſhould be ſtudiouſly avoided in a copy, even though a correct one, made after the fineſt ſtatue, which will never convey an idea but that of a ſtatue; whereas there is ſuch a freedom obſervable in the imitations of nature, as evidently diſtinguiſhes them from thoſe taken either from marble or plaſter.

LESSON V.

Of Light and Shade.

HAVING outlined the folds, and the other parts of drapery, you may next attempt the ſhadowing your figure, obſerving the following method:

Shadow the drawing with the pencil or pen; in which great care is required. Firſt, obſerve from which ſide the light comes in; which, if natural, ought to be from the right or left; for when the light comes in the middle, it is called an artificial light, as proceeding from ſome artificial luminary, as a candle, lamp, &c. Lay your ſhades rather faint at firſt, that you may heighten them at pleaſure where neceſſary.

Remember that your ſhades muſt be all on the ſame ſide of the figure; that is to ſay, if the right ſide of the face be in ſhade, ſo muſt the ſame ſide of the body, arm, leg, &c. Your ſhades muſt be faint as they approach the

the light, the ſtrength gradually decreaſing towards the extremities, to prevent a harſh appearance.

A piece of paper or glove-leather, rolled hard and cut almoſt to a point, like a pencil, is uſeful (if you ſhade with the pencil, red chalk, or crayons) to blend the ſhades, and ſoften them into each other; as alſo where they appear too ſtrong, to weaken them. By examining nature you will improve your ideas in light and ſhade as well as in outlines, and be enabled to form a right judgment of the truth of your drawing. Indian ink may be prepared for a few different ſhades, by rubbing it more or leſs in water on a marble ſtone, cut in hollows for that purpoſe, reſerving one of the hollows for the water.

To take a perfect Draught of a Picture.

1. TAKE a ſheet of the fineſt white paper you can get, wet it over with clean linſeed oil on one ſide, and wipe the oil off again as clean as you can, then let it ſtand and dry, otherwiſe it will ſpoil a printed picture by the ſoaking through of the oil. Having thus prepared your paper, lay it on any printed or painted picture, and you may ſee perfectly through it; then with a black lead pencil you may copy with eaſe any picture on the oiled paper, then put it upon a ſheet of clean white paper, and with a little pointed tracer or burniſher go over your ſtrokes which you drew upon the oiled paper, and you ſhall have the ſame very neatly and exactly drawn upon the white paper.

2. HAVING

2, HAVING drawn the picture, take the oiled paper, and pin it upon a ſheet of white paper, and prick over the drawing with a pin, then take it off and lay the white paper upon the thing you would draw, and duſt it over with charcoal-duſt tied looſely in a rag, and it will leave a true copy of your original, which you may touch up with a black lead pencil; the pricked paper will laſt you longer, and likewiſe be more complete, if it was varniſhed over and made perfectly dry before you prick it.

3. TAKE a piece of fine paper, as above, and bruſh it over with oil of turpentine, it will immediately become tranſparent, and may be uſed without loſs of time in drying. It ſhould not be prepared before it is wanted, becauſe as it dries it loſes its tranſparency.

4. TAKE a ſheet of fine white paper and rub it over on one ſide with black lead, or elſe with vermillion, tempered with a little freſh butter; lay the coloured ſide upon a ſheet of white paper, and lay the picture you would copy out upon the other ſide of the coloured paper, and with a ſmall pointed tracer go over all the ſtrokes of your picture, and the ſtrokes will be drawn on the white paper.

5. TAKE a piece of white lantern-horn, and lay it upon your picture, then with a hard-nibbed pen and ink draw the ſtrokes of your picture upon the horn; when it is dry, breathe upon the horn in order to moiſten the ink, then preſs it hard on a piece of white paper a little wetted, and the picture you drew upon the horn will appear upon the paper. You may reverſe your picture by drawing over the other ſide.

6, LAY

6. LAY a paper print upon a bright glaſs window, with the back-ſide of the print upon the window, then lay a clean paper upon the print, and draw the outſtrokes upon the paper, which you may viſibly ſee, it being ſet up againſt the light; and by this method you may ſhadow it as fine and as exact as you pleaſe.

To make Camp Paper, with which a Perſon may write or draw without Pen, Ink, or Pencil.

TAKE ſome hard ſoap, mix it with lamp black, make it into the conſiſtence of a jelly, with water; with this, bruſh over one ſide of your paper, and let it dry: when you uſe it, put it between two ſheets of clean paper, with its black ſide downward, and with a pin or ſtick, with a ſharp point, draw or write what you pleaſe upon the clean paper; and where the tracer has touched, there will be the impreſſion upon the lowermoſt ſheet of paper, as if it had been written or drawn with a pen.

It may be made of any colour, by mixing the ſoap with different colours.

The Method of Enlarging and Contracting.

DIVIDE your original with a pair of compaſſes into any number of ſquares, and rule them acroſs with a black lead pencil from ſide to ſide, and from top to bottom. Then having your paper of the ſize you intend, divide it into the ſame number of ſquares, either large or leſs, as you would enlarge or contract it, and place your original

ginal before you, and draw ſquare by ſquare the ſeveral parts, obſerving to make the part you are drawing fall in the ſame part of the ſquares as it does in your original. To prevent miſtakes, number the ſquares both of the original and copy, as in Fig. 1 and 2, Plate I. then outline it with Indian ink; rub out the marks of the pencil with bread, and ſhade it at pleaſure.

Though this is an ancient method, yet it is now much practiſed, and is of great help to painters in general.

The Method of Etching Copperplates.

ETCHING is a manner of engraving on copper, wherein the lines or ſtrokes, inſtead of being cut with a tool or graver, are eaten in with aquafortis.

Etching has ſeveral advantages over graving; 1ſt, As being done with more eaſe and expedition: 2d, As requiring fewer inſtruments: and, 3d, As repreſenting curious kinds of ſubjects better and more agreeable to nature; as landſcapes, ruins, grounds, and ſmall, faint, looſe, remote objects, &c.

Of the proper Inſtruments and Materials uſed in Etching.

THE principal inſtruments for etching are needles, oil-ſtone, bruſh-pencils, burniſher, ſcraper, compaſſes, ruler, tracer, and the frame: the materials are the hard and ſoft varniſh, prepared oil, and aquafortis.

The

The needles are to be choſen of ſeveral ſizes, of a fine grain, and ſuch as will break without bending. Theſe are to be fixed in round ſticks, of firm wood, about ſix inches in length, and the thickneſs of a large gooſe-quill: they are to ſtand out of the ſticks about a quarter of an inch, or ſomething better. Of theſe you ſhould have twenty at leaſt, which may be fixed in ſuch ſticks as to have a pencil at the other end.

The uſe of the oil-ſtone is for whetting the needles, which, if you would have the points round, muſt be whetted ſhort upon the ſtone, by turning them round; and if you would have them ſloping, they are firſt to be blunted upon the oil-ſtone, and then whetted ſloping on one ſide only, till they come to a ſhort and roundiſh oval.

The bruſh pencil is to cleanſe the work, wipe off duſt, and to ſtrike the colours even over the ground or varniſh, when laid upon the plate.

The burniſher is a piece of ſteel well hardened, ſomewhat roundiſh at the end, for ſmoothing and giving a luſtre to the plate.

The ſcraper is one of the inſtruments fitted for clearing the plate of all deeper ſcratches or ſtrokes which the burniſher will not take away.

The chief uſe of the compaſſes is in meaſuring diſtances, or ſtriking circles, or ſome part or portion of them where you would have your work to be exact.

The ruler is uſed chiefly in drawing all the ſtraight hatches or lines of the deſign upon the plate; or to mark out diſtances upon ſtraight lines.

The tracer is uſed for drawing through all the outmoſt lines or circumferences of the print, pattern, or drawing, which is etching after.

There are two methods of etching, viz. one with hard varniſh or ground, the other with ſoft. The hard was formerly much uſed, being better accommodated to the intention of imitating the engraving with the tool; as the firmneſs of the body of the varniſh gave more opportunity of retouching the lines, or enlarging them with the oval pointed needles; but the ſoft varniſh has now almoſt wholly ſuperſeded the uſe of the hard, by the free manner of working it admits of.

To make Soft Varniſh for Etching.

TAKE virgin's wax and aſphaltum, each two ounces; of black pitch and Burgundy pitch in a new earthen-ware glazed pot; and add to them, by degrees, the aſphaltum finely powdered. Let the whole boil, till ſuch time as taking a drop upon a plate, it will break when it is cold on bending it double two or three times betwixt the fingers. The varniſh being then boiled enough, it muſt be taken off the fire, and letting it cool a little, muſt be poured into warm water, that it may work the more eaſily with the hand, ſo as to be formed into balls; which muſt be rolled up, and put into a piece of taffety for uſe.

It muſt be obſerved, firſt, that the fire be not too violent, for fear of burning the ingredients; a ſlight ſimmering will be ſufficient: ſecondly, that while the aſphaltum is putting in, and even after it is mixed with them, the ingredients ſhould be ſtirred continually with the ſpatula: and thirdly, that the water into which this compoſition is thrown, ſhould be nearly of the ſame degree of warmth with it, to prevent a kind of cracking that happens when the water is too cold.

The varniſh ought always to be harder in ſummer than in winter; and it will become ſo if it be ſuffered to boil longer, or if a greater proportion of aſphaltum or brown roſin be uſed. The experiment above-mentioned, of the drop ſuffered to cool, will determine the degree of hardneſs or ſoftneſs that may be ſuitable to the ſeaſon when it is uſed.

The Method of applying the Soft Varniſh to the Plate.

THE plates are to be procured ready for the work, at the braziers; but there are people whoſe buſineſs it is to make them of all ſizes in London. Having a plate according to the ſize you intend, clear it from all greaſineſs by chalk or Spaniſh white, fix a hand-vice on the edge of the plate, where no work is intended to be, to ſerve as a handle for managing it when warm: then put it on a chaffing-diſh in which there is a moderate fire, obſerving to hold it ſo that it may not burn: keep the plate over the fire till it be ſo hot, that the varniſh, being brought into contact with it, may melt: then cover the whole plate over with a thin coat of the varniſh, and while the plate is warm, and the varniſh upon it in a fluid ſtate, dab (or beat) every part of the varniſh gently with a ſmall ball

(or dabber) made of cotton, tied up in taffety; which operation ſmooths and diſtributes the varniſh equally over the plate.

When the plate is thus uniformly and thinly covered with the varniſh, it muſt be blackened by a piece of flambeau, or large candle, which affords a copious ſmoke; ſometimes two, or even four, ſuch candles are uſed together for the ſake of diſpatch, that the varniſh may not grow cold; which if it does during the operation, the plate muſt then be heated again, that it may be in a melted ſtate when that operation is performed: but great care muſt be taken not to burn it, which when it happens, may be eaſily perceived by the varniſh appearing burnt, and loſing its gloſs.

It is proper to be very cautious in keeping the flambeau or candle at a due diſtance from the plate, leſt the wick touch the varniſh, which would both ſully and mark it. If it appear that the ſmoke has not penetrated the varniſh, the plate muſt be again placed for ſome little time over the chaffing diſh; and it will be found that, in proportion as the plate grows hot, the varniſh will melt and incorporate with the black which lay above it, in ſuch a manner, that the whole will be equally pervaded by it.

Above all things, the greateſt caution ſhould be uſed in this operation, to keep all the time a moderate fire; and to move frequently the plate, and change the place of all the parts of it, that the varniſh may be melted alike everywhere, and kept from burning. Care muſt alſo be taken that, during this time and even till the varniſh be entirely cold, no filth, ſparks, or duſt fly on it; for they would ſtick faſt, and ſpoil the work.

To make the Hard Varniſh for Etching.

TAKE four ounces of fat oil, very clear, and made of good linſeed oil, like that uſed by painters: heat it in a clean pot of glazed earthen ware, and afterwards put to it four ounces of maſtich well powdered, and ſtir the mixture briſkly till the whole be melted, then paſs the whole maſs through a piece of fine linen, into a glaſs bottle that can be ſtopped very ſecurely; and it is fit for uſe. The method of applying this varniſh is preciſely the ſame as for the ſoft; being ſpread equally over the warm plate with the taffety-ball, and ſmoked in the ſame manner; only after if is ſmoked, it muſt be baked, or dried over a gentle fire of charcoal, till the ſmoke from the varniſh begin to decreaſe, taking care not to overheat the plate, which would both ſoften it and burn the varniſh.

To make the Soft Wax for the Borders of the Plate, to keep on the Aquafortis.

TAKE four ounces of bees wax, temper it with a little Venice turpentine and tallow to a proper conſiſtence; which will be eaſily found by trial.

General Directions for Etching.

THE method of etching is as follows: the plate being covered over with a peculiar ground or varniſh, as already directed, and that ſide blackened with the ſmoke of a candle, the back of the deſign or draught is laid over

over the varniſh, being firſt rubbed with red chalk: then the deſign being laid on, is to be transferred upon the varniſhed ſide of the plate. This is done by tracing over all the lines and ſtrokes of the draught with a needle or point, not very ſharp, which preſſing the paper cloſe down to the ground, cauſes the wax to lay hold of the red chalk, and thus brings off with it the marks of the ſeveral lines, ſo that at length it ſhews a copy of the whole deſign in all its correctneſs.

In the mean time, it is neceſſary to obſerve, that ſuch parts of the plate as you do not work on is to be covered with a ſheet of fine white paper, and a ſheet of brown over that; upon this you may reſt your hand, to keep it from the varniſh. If you make uſe of a ruler, lay ſome part of it upon the paper, that it may not rub off the varniſh; and take ſpecial care that no duſt or filth get in between the paper and the varniſh, becauſe that would hurt it.

The draught or deſign being thus chalked, the etcher next proceeds to draw the ſeveral lines with a pointed tool through the ground upon the copper. In doing this, he makes uſe of points of various ſizes, and preſſes them on more ſtrongly or lightly according as the ſeveral parts of the figures, &c. require more or leſs ſtrength or boldneſs.

This done, a rim or border of wax is raiſed round the circumference of the plate, to keep in the aquafortis, and prevent it from running off at the edges; and then it is poured on the plate ſo prepared. The ground or varniſh with which the plate is covered, defends it everywhere from the corroſive quality of the aquafortis, except in thoſe lines or hatches cut through the ground with

with the points, which lying open, the water passes through them into the copper, and eats into it the depth required; which being done, it is poured off again.

It is to be observed, that the aquafortis must not continue equally long, or be poured on equally over all the parts of the design; and you must let it down to a proper strength with water, which no rule but practice can teach, without the strength of the aquafortis could be obtained, and likewise the goodness of the ground; the remote parts must first be eaten more slightly than those nearer the view. For effecting this, a composition of oil and grease, with which they cover all the parts that are to be eaten no farther, is made use of; or else this composition is at first laid on as a defence, and taken off again when they find it proper. In a word, they are every now and then covering or uncovering one or another part of the design as occasion requires.

The management of the aquafortis is the principal matter in the whole art of etching; and on which the effect of the whole chiefly depends. The workman must be observant as to the ground, that it does not fail or give way in any part of the aquafortis; and if in any place it does, to stop up that with common varnish. It must be also observed, that a fresh dip of aquafortis must never be given without first washing out the plate in fair water, and drying it at the fire.

When the aquafortis has performed its part, the ground must be taken off and the plate washed and dried; after which, the artist must examine it, and with his graver touch it up, and heighten it where the aquafortis, &c. has missed.

Particular

Particular Directions for Etching.

IN making lines or hatches, as there muſt be ſome bigger and ſome leſs, ſome ſtrait and ſome crooked, you muſt uſe ſeveral ſorts of needles, bigger or leſs, as the work requires. The large lines are made by leaning hard on the needle, the point being ſhort and thick (but a round point will not cut the varniſh clear) or by making divers lines or hatches very cloſe to one another, and then paſſing over them again with a thicker needle; or by making them with a pretty large needle, and letting the aquafortis be longer thereon.

If your lines or hatches ſhould be of an equal thickneſs from end to end, lean on the needle with an equal force, leaning lightly where you would have the lines or ſtrokes fine or ſmall; and heavier where you would have them appear deep or large. If the lines are too ſmall, paſs over them again with a ſhort but round point, of ſuch a bigneſs as you would have the line, and leaning ſtrongly where you would have it deep.

The manner of holding the needle with oval points, which is moſt proper for making large and deep ſtrokes, much reſembles that of a pen; only the flat ſide whetted is uſually held next the thumb; yet it may be uſed with the face of the oval turned towards the ſide of the little finger.

If you would end with a fine ſtroke, you muſt draw it with a fine needle; and in uſing the oval points, hold them as upright and ſtraight in your hand as you can, ſtriking your

your ſtrokes firmly and freely, for that will add much to their beauty and clearneſs.

In etching landſcapes, you muſt uſe ſlender points for faint ſtrokes to thoſe places at the greateſt diſtance from view, as alſo thoſe neareſt the light; and muſt be careful, while at work, to bruſh off all the duſt worked off with the needles.

It is neceſſary to obſerve, that you ought to be ſo far maſter of the art of drawing as to be able to copy any print or painting exactly, and to draw after good heads of plaſter or figures, according to your own fancy, and to ſhadow every thing exactly according to art; and therefore, when you imitate plaſter, be ſure to take the true outlines or circumferences; and taking notice how the ſhadow falls, to do it very faint, as ſoft as the deſign requires. Therefore, it is convenient that you be able to hatch with the pen exactly, after good copies; and when you can do that, to draw after plaſter, and then to draw from the life.

In order to take the outlines of any drawing or print upon the ground of the plate, you muſt ſcrape a little white lead on the back ſide; then take a feather and rub it over everywhere alike, and ſhake off that which remains looſe.

Having done this, lay the print on the plate, over that ſide where the lead is, and faſten the four corners of it to the plate with a little ſoft wax; then take the tracer and draw upon the print all the outmoſt lines or circumferences exactly. When you have done this, take off the print from the plate, and all the ſame outlines and

circumferences, which you drew upon the print with the tracer, will exactly be found upon the ground.

Then you must observe exactly how your original or pattern is shadowed, how close the hatches are joined, how they are laid, and which way the light falls or comes in. This must be made to fall one way; and if the light falls sideways in the print, you must hatch that side darkest which is fartheſt from the light; and so place the lights all together on one side, and not confusedly, part on one side, and part on the other.

Take heed how close all the hatches join, how they incline, and which way they twist and wind. This follow as exactly as you can; but before you begin to hatch or shadow, you must not fail to draw all the outlines with a needle upon the ground as artificially as you can, and shadow it with your different needles according to the original.

In landscapes, that part next the eye, as was already observed, is to be hatched darkest, and the rest is to decline in its shadows by degrees the farther it is off from view. The same method is to be observed in etching a sky; for that which is neareſt to the eye must be shadowed darkest, but in general as soft and faint as possible, losing itself gradually, as directed before; and by how much nearer the sky comes to the ground, by so much the more loose and faint must it be made to appear; and where they both meet, as it were, together, the sky must be quite lost.

In etching letters, screw the copperplate in a handvice, then hold it over a charcoal fire till it be warm; rub a piece of virgin wax all over the plate, spreading it very

very even with a feather, and then letting it cool. The letters being written on paper with a black lead pencil, lay the written ſide downwards upon the waxed plate, and faſten the four corners with a little ſoft wax, placeing the writing ſo exact, that the lines may run ſtraight. Then rub the backſide of the paper all over with a burniſher, taking care not to miſs any part thereof, and, taking the paper off the plate, you will find all the letters written on the paper left exact on the wax. Then draw all the letters through the wax on the plate with a tracer, and afterwards clean the work from the looſe wax with a linen rag or pencil-bruſh; and laſtly, pouring on the aquafortis, the letters will be etched. All the former operations being performed, waſh the plate with fair water, and ſet it wet upon the fire till the mixture be well melted; then wipe it very clean on both ſides with a linen cloth till it is thoroughly clear of all the mixture. In the next place, take good charcoal, and, pulling off the rind, put fair water on the plate, and rub it with the charcoal, as if you were to poliſh it; and by this operation you will get off the varniſh; only you muſt remember that the charcoal is to be free of all ſorts of knots and roughneſs, and that no ſand or filth fall on the plate. After this, adding two-thirds of fair water to one third of common aquafortis, dip a linen rag in it; which, by rubbing the plate all over, will reſtore it to its former beauty. However, it is neceſſary that the plate be wiped after this, with dry linen rags, to take off the ſaid water: this is done by holding it a little before the fire, putting on a little olive-oil, and, with the fur of an old beaver hat rolled up, rubbing the plate all over before it is wiped with the dry cloth.

Laſtly, If any places require to be touched with the graver, as it frequently happens, eſpecially where it is to be very deep or black, carefully correct them; and then the plate is fit to be carried to the rolling-preſs.

Of Engraving.

THE tools neceſſary for engraving are, the oil-rubber, burniſher, ſcraper, oil-ſtone, needles, and ruler, already mentioned to be uſed in etching; alſo gravers, compaſſes, a ſand-bag, and ſome good charcoal.

Gravers are of two ſorts, ſquare and lozenge; three of each ſort ſhould be provided. The firſt is uſed in cutting the broader ſtrokes; the other for the fainter and more delicate. No graver ſhould exceed the length of five inches and a half, the handle included, excepting for ſtraight lines.

The ſand-bag or cuſhion, is uſed to lay the plate on, for the conveniency of turning it about. The oil-ſtone muſt be of the Turkey ſort, and may be procured at the ironmongers.

Of whetting and tempering the Graver.

As great pains is required to whet the graver nicely, particularly the belly of it, care muſt be taken to lay the two angles of the graver, which are to be held next the plate, flat upon the ſtone, and rub them ſteadily, till the belly riſes gradually above the plate, ſo as that, when you lay the graver flat upon it, you may juſt perceive the light under the point; otherwiſe it will dig into the copper, and then it will be impoſſible to keep a point,

a point, or execute the work with freedom. In order to this, keep your right arm close to your side, and place the fore finger of your left hand upon that part of the graver which lies uppermost on the stone. When this is done, in order to whet the face, place the flat part of the handle in the hollow of your hand, with the belly of the graver upwards, upon a moderate slope, and rub the extremity or face upon the stone, till it has an exceeding sharp point, which you may try upon your thumb-nail. The oil-stone, while in use, must never be kept without oil.

When the graver is too hard, as is usually the case when first bought, and may be known by the frequent breaking of the point, the method of tempering it is as follows:

Heat a poker red hot, and hold the graver upon it within half an inch of the point, till the steel changes to a light straw-colour; then put the point into oil to cool; or, hold the graver close to the flame of a candle, till it be of the same colour, and cool it in the tallow; but be careful either way not to hold it too long, for then it will be too soft; and in this case the point, which will then turn blue, must be tempered again. Be not too hasty in tempering; for sometimes a little whetting will bring it to a good condition when it is but a little too hard.

Of holding the Graver.

CUT off that part of the handle which is upon the same line with the belly, or sharp edge of the graver, making that side flat, that it may be no obstruction.

Hold

Hold the handle in the hollow of your hand; and extending your fore finger towards the point, let it reſt on the back of the graver, that you may guide it flat and parallel with the plate.

Take care that your fingers do not interpoſe between the plate and the graver; for they will prevent you from carrying the graver level with the plate, and from cutting your ſtrokes ſo clean as they ought to be.

Of laying the Deſign upon the Plate.

AFTER you have poliſhed the plate fine and ſmooth, heat it ſo as it will melt virgin-wax; with which rub it thinly and equally over, and let it cool. Then the deſign which you lay on, muſt be drawn on paper, with a black lead pencil, and laid upon the plate with its penciled ſide upon the wax, then preſs it to, and with a burniſher go over every part of the deſign, and when you take off the paper you will find every line which you drew with the black lead pencil upon the waxed plate, as if it had been drawn; then with a ſharp-pointed tool trace all your deſign through the wax upon the plate, and you may then take the wax off, and proceed to work.

Directions for Engraving.

LET the table or board you work at be firm and ſteady; upon which place your ſand-bag with the plate upon it; and, holding the graver as above directed, proceed in the following manner:

For

For ſtraight ſtrokes, hold your plate firm upon the ſand-bag with your left hand, moving your right hand forwards; leaning lighter where the ſtroke ſhould be fine, and harder where you would have it broader.

For circular or crooked ſtrokes, hold the graver ſtedfaſt, moving your hand or the plate, as you ſee convenient.

Learn to carry your hand with ſuch a ſlight, that you may end your ſtroke as finely as you began it; and if you have occaſion to make one part deeper or blacker than another, do it by degrees: and that you may do it with greater exactneſs, take care that your ſtrokes be not too cloſe, nor too wide.

In the courſe of your work, ſcrape off the roughneſs which ariſes, with the belly of your graver; but be careful, in doing this, not to ſcratch the plate: and that you may ſee your work properly as you go on, rub it with the oil-rubber, and wipe the plate clean, which will take off the glare of the copper, and ſhew what you have done to the beſt advantage.

Any miſtakes or ſcratches in the plate may be rubbed out with the burniſher, and the part levelled with the ſcraper, poliſhing it again afterwards lightly with the burniſher, or charcoal.

Having thus attained the uſe of the graver, according to the foregoing rules, you will be able to finiſh the piece you had etched, by graving up the ſeveral parts to the colour of the original; beginning, as in the etching, with

with the fainter parts, and advancing gradually with the ſtronger, till the whole is completed.

The dry needle (ſo called becauſe not uſed till the ground is taken off the plate) is principally employed in the extreme light parts of water, ſky, drapery, architecture, &c.

For your firſt practice, copy ſuch prints as are openly ſhaded; the more finiſhed ones being too difficult, till you have gained farther experience.

To prevent any obſtruction from too great a degree of light, the uſe of a ſaſh, made of tranſparent, or fan-paper, paſted on a frame, and placed ſloping at a convenient diſtance between your work and the light, will not only preſerve the ſight, but, when the ſun ſhines, it cannot poſſibly be diſpenſed with.

Of Mezzotinto-Scraping.

THIS art, which is of late date, is recommended to the practice of the ingenious reader, for the amazing eaſe with which it is executed, eſpecially by thoſe who have any notion of drawing.

Mezzotinto prints are thoſe which have no hatching or ſtrokes of the graver, but whoſe lights and ſhades are blended together, and appear like a drawing of Indian ink.

The tools uſed in this art are, the copper plate, oil-ſtone, grounding-tools, ſcrapers, burniſhers, and needles.

Directions

Directions for laying the Mezzotinto Ground.

MARK off upon the bottom of the plate the diſtance you intend to leave for the writing, coat of arms, &c. then laying your plate with a piece of ſwanſkin-flannel under it, upon your table, hold the grounding-tool in your hand perpendicularly, lean upon it moderately hard, continually rocking your hand in a right line from end to end, till you have wholly covered the plate in one direction: next croſs the ſtrokes from ſide to ſide, afterwards from corner to corner, working the tool each time all over the plate, in every direction, almoſt like the points of a compaſs; taking all poſſible care not to let the tool cut (in one direction) twice in a place. This done, the plate will be full, or, in other words, all over rough alike, and would, if it were printed, appear completely black.

Having laid the ground, take the ſcrapings of black chalk, and with a piece of rag rub it over the plate; or you may with two or three candles ſmoke it, as before directed, for etching.

Now, take your print or drawing, and (having rubbed the black with red chalk-duſt, mixed with white lake) proceed to trace it on the plate.

Directions for ſcraping the Picture.

TAKE a blunt needle, and mark the outlines only, then with a ſcraper ſcrape off the lights in every part

of the plate, as clean and ſmooth as poſſible, in proportion to the ſtrength of the lights in your picture, taking care not to hurt your outlines: and that you may the better ſee what you do, with the thumb and fore finger of the left hand hold a piece of tranſparent paper, ſloping, juſt over your right hand, and you will ſoon be a judge of the different tints of the work you are doing; ſcraping off more or leſs of the ground as the different ſtrengths of light and tints require.

The uſe of the burniſher is, to ſoften or rub down the extreme light parts after the ſcraper is done with; ſuch as the tip of the noſe, forehead, linen, &c. which might otherwiſe, when proved, appear rather miſty than clear.

Another method uſed by mezzotinto ſcrapers, is, to etch the outlines of the original, as alſo the folds in drapery, making the breadth of the ſhadows by dots, which having bit to a proper depth with aquafortis, then take off the ground uſed in etching, and having laid the mezzotinto ground, proceed to ſcrape the picture, as above.

Four or five days before you think the plate will be ready for proving, wet ſome French paper, as no other will do ſo well for this work; and that time is neceſſary for it to lie wet. Then when the proof is dry, touch it with white chalk where it ſhould be lighter, and with black chalk where it ſhould be darker; and when the print is retouched, proceed as before for the lights, and for the ſhades uſe a ſmall grounding-tool, as much as you judge neceſſary to bring it to proper colour: and when you have done as much as you think expedient,

prove

prove it again, and ſo proceed to prove and touch till itis entirely to your mind.

Avoid as much as poſſible over-ſcraping any part before the firſt proving, as by this caution the work will appear more elegant.

The method of etching Copper Plates with Aqua-Tinta.

TAKE a copper plate prepared as before directed for etching and engraving, lay the etching ground upon it, and etch the outlines of your deſign; take the ground off and clean the plate perfectly well, then ſprinkle gum-ſandarach in fine powder very thin and even over the plate, and warm the plate, ſo as juſt to faſten the gum-ſandarach; but great caution muſt be here obſerved not to melt the gum; if you do, the ſpirits of nitre will have no effect, and it will require to be done over again. After it is cold, dip a ſmall bruſh pencil in ſpirits of nitre, and go over every part you intend to ſhadow for the firſt time; repeat the ſame operation until you have brought it to your ſatisfaction. If your ſpirits be too ſtrong, you may mix it with a little water.

Mr. P. Sandby has finiſhed ſome excellent prints by this method, which are held in great eſteem among the admirers of exhibitions of this kind.

This art has been kept as ſecret as poſſible by thoſe who have practiſed it; and I believe this is the firſt hint of the proceſs that the public has been favoured with.

Crayon Painting.

THE elegant arts, of which painting is one of the moſt conſiderable, have ever been held in the higheſt eſtimation by the great and illuſtrious of all ages; not ſolely for private amuſement, but for their beneficial influence in ſociety, in promoting benevolence, and inſpiring delicacy of feeling.

This will not appear paradoxical, if we obſerve, that they are evidently contrived to afford innocent pleaſures, diſregarding the inferior ſenſes. In this light they may be conſidered as a rational ſcience; and when cultivated to an eminent degree of refinement, they do honour to mankind.

Every attempt to encourage and improve the elegant arts deſerves great commendation, ſince there is too much reaſon for believing that the intereſts of humanity are not ſo ſtrongly guarded, or ſo firmly ſecured, as eaſily to relinquiſh thoſe ſuccours, or forego thoſe aſſiſtances which they adminiſter to them.

Since painting is an art in which truth of outlines is no leſs neceſſary than juſtneſs of colouring, I apprehend a few hints relative to the former will not (even at this period) be deemed ſuperfluous or unneceſſary: for, ſhould theſe elements fall into the hands of the accompliſhed artiſt, to whoſe judgment I ſubmit them with the higheſt diffidence, I flatter myſelf I ſhall meet with favour and indulgence, ſince I intend this work principally for the uſe of thoſe who are juſt entering into the world

world of imitation. To ſuch, I hope to make an offering worthy their acceptance, ſhould inclination lead them to the ſtudy of painting with crayons, by exhibiting the materials uſed in this art, with the methods of making and preparing them for the execution of deſign.

I am in hopes of rendering ſome ſervice to the art of painting with crayons, of ſuggeſting ſome hints which may poſſibly give riſe to further enquiries reſpecting this pleaſing ſtudy, and of explaining its principles for the benefit of ſuch as may prefer the ſilent amuſement of a beautiful art to the deluſive enchantments in the gay circles of pleaſures.

I ſhall now endeavour to give the ſtudent ſome directions towards the attainment of excellence in this art.

The ſtudent muſt provide himſelf with ſome ſtrong blue paper, the thicker the better, if the grain is not too coarſe and knotty, though it is almoſt impoſſible to get any entirely free from knots. The knots ſhould be levelled with a pen-knife or razor, otherwiſe they will prove exceedingly troubleſome. After this is done, the paper muſt be paſted very ſmooth on a linen cloth, previouſly ſtrained on a deal frame, the ſize according to the artiſt's pleaſure: on this the picture is to be executed; but it is moſt eligible not to paſte the paper on till the whole ſubject is firſt dead-coloured. The method of doing this is very eaſy, by laying the paper with its dead colour on its face, upon a ſmooth board or table, when, by means of a bruſh, the back ſide of the paper muſt be covered with paſte; the frame, with the ſtrained cloth, muſt then be laid on the paſted ſide of the paper, after which turn the painted ſide uppermoſt, and

lay

lay a piece of clean paper upon it, to prevent ſmearing; this being done, it may be ſtroked gently over with the hand, by which means all the air between the cloth and the paper will be forced out.

When the paſte is perfectly dry, the ſtudent may proceed with the painting. The advantages ariſing from paſting the paper in the frame, according to this method (after the picture is begun) are very great, as the crayons will adhere much better than any other way; which will enable the ſtudent to finiſh the picture with a firmer body of colour, and greater luſtre.

When painters want to make a very correct copy of a picture, they generally make uſe of a tiffany, or black gauze, ſtrained tight on a frame, which they lay flat on the ſubject to be imitated, and with a piece of ſketching-chalk, trace all the outlines on the tiffany. They then lay the canvas to be painted on flat upon the floor, placing the tiffany with the chalked lines upon it, and with an handkerchief bruſh the whole over. This preſents the exact outlines of the picture on the canvas.

The crayon-painter may alſo make uſe of this method when the ſubject of his imitation is in oils; but in copying a crayon picture, he muſt have recourſe to the following method, on account of the glaſs:

The picture being placed upon the eſel, let the outlines be drawn on the glaſs with a ſmall camel's hair-pencil dipped in lake, ground thin with oils, which muſt be done with great exactneſs: after this is accompliſhed, take a ſheet of paper of the ſame ſize, and place it on the glaſs, ſtroking over all the lines with the hand; by which

which means the colours will adhere to the paper, which muſt be pierced with pin-holes pretty cloſe to each other. The paper intended to be uſed for the painting muſt next be laid upon a table, and the pierced paper placed upon it; then with ſome fine pounded charcoal, tied in a piece of lawn, rub over the perforated ſtrokes, which will give an exact outline. Great care muſt be taken not to bruſh this off till the whole is drawn over with ſketching chalk, which is a compoſition made of whiting and tobacco-pipe clay rolled like crayons, and pointed at each end.

When the ſtudent paints immediately from the life, it will be moſt prudent to make a correct drawing of the outlines on another paper, the ſize of the picture he is going to paint, which he may trace by the preceding method, becauſe erroneous ſtrokes of the ſketching-chalk (which are not to be avoided without great expertneſs) will prevent the crayons from adhering to the paper, owing to a certain greaſy quality in the compoſition.

The ſtudent will find the ſitting poſture, with the box of crayons in his lap, the moſt convenient method for him to paint. The part of the picture he is immediately painting ſhould be below his face; for, if it is placed too high, the arm will be fatigued. Let the windows of the room where he paints be darkened at the leaſt to the height of ſix feet from the ground, as before directed, and the ſubject to be painted ſhould be ſituated in ſuch a manner that the light may fall with every advantage on the face; avoiding too much ſhadow, which ſeldom has a good effect in portrait-painting, eſpecially if the face he paints has any degree of delicacy. Before he begins to paint, let him be attentive to his ſubject, and appropriate

propriate the action or attitude proper to the age of the ſubject; if a child, let it be childiſh; if a young lady, expreſs more vivacity than in the majeſtic beauty of a middle-aged woman, who alſo ſhould not be expreſſed with the ſame gravity as a perſon far advanced in years. Let the embelliſhments of the picture, and introduction of birds, animals, &c. be regulated by the rules of propriety and conſiſtency.

The features of the face being carefully drawn with chalk, let the ſtudent take a crayon of pure carmine, and carefully draw the noſtril and edge of the noſe next the ſhadow; then with the fainteſt carmine tint lay in the ſtrongeſt light upon the noſe and forehead, which muſt be executed broad. He is then to proceed gradually with the ſecond tint, and the ſucceeding ones, till he arrives at the ſhadows, which muſt be covered brilliant, enriched with much lake, carmine a little broken, with brilliant green. This method, will, at firſt, offenſively ſtrike the eye, from its crude appearance, but, in finiſhing, it will be a good foundation to produce a pleaſing effect, colours being much more ea ly ſullied when too bright, than when the firſt colouring is dull, to raiſe the picture into a brilliant ſtate. The ſeveral pearly tints, diſcernible in fine complexions, muſt be imitated with blue verditer and white, which anſwers to the ultramarine tints uſed in oils. But if the parts of the face where theſe tints appear are in ſhadow, the crayons compoſed of black and white muſt be ſubſtituted in their place.

Tho' all the face when firſt coloured ſhould be laid in as brilliant as poſſible, yet each part ſhould be kept in its proper

proper tone, by which means the rotundity of the face will be preſerved.

Let the ſtudent be careful when he begins the eyes, to draw them with a crayon inclined to the carmine tint, of whatever colour the iris are of; he muſt lay them in brilliant at firſt, not loaded with colour, but executed lightly: no notice to be taken of the *pupil* yet. The ſtudent muſt let the light of the eye incline very much to the blue caſt, cautiouſly avoiding a ſtaring white appearance (which when once introduced, is ſeldom overcome) preſerving a broad ſhadow thrown on its upper part by the eye-laſh. A black and heavy tint is alſo to be avoided in the eye-brows; it is therefore, beſt to excute them like a broad glowing ſhadow at firſt, on which, in the finiſhing, the hairs of the brows are to be painted; by which method of proceeding, the former tints will ſhew themſelves through, and produce the moſt pleaſing effect.

The ſtudent ſhould begin the lips with pure carmine and lake, and in the ſhadow uſe ſome carmine and black; the ſtrong vermillion tints ſhould be laid on afterwards. He muſt beware of executing them with ſtiff, harſh lines, gently intermixing each with the neighbouring colours, making the ſhadow beneath broad, and enriched with brilliant crayons. He muſt form the corner of the mouth with carmine, brown oker, and greens, variouſly intermixed. If the hair is dark, he ſhould preſerve much of the lake and deep carmine tints therein; this may be eaſily overpowered by the warmer hair tints, which, as obſerved in painting the eye-brows, will produce a richer effect when the picture is finiſhed: on the contrary, if this method is unknown or neglected, a poverty of colouring will be diſcernible.

After the ſtudent has covered over, or as artiſts term it, has dead-coloured the head, he is to ſweeten the whole together by rubbing it over with his finger, beginning at the ſtrongeſt light upon the forehead, paſſing his finger very lightly, and uniting it with the next tint, which he muſt continue till the whole is ſweetened together, often wiping his finger on a towel to prevent the colours being ſullied. He muſt be cautious not to ſmooth or ſweeten his picture too often, becauſe it will give riſe to a thin and ſcanty effect, and have more the appearance of a drawing than a ſolid painting, as nothing but a body of rich colours can conſtitute a rich effect. To avoid this (as the ſtudent finds it neceſſary to ſweeten with the finger) he muſt continually repleniſh the picture with more crayon.

When the head is brought to ſome degree of forwardneſs, let the back-ground be laid in, which muſt be treated in a different manner, covering it as thin as poſſible, and rubbing it into the paper with a leather ſtump. Near the face the paper ſhould be almoſt free from colour; for this will do great ſervice to the head, and by its thinneſs, give both a ſoft and ſolid appearance. In the back-ground alſo, crayons which have whiting in their compoſition ſhould be uſed, but ſeldom or never without caution; but chiefly ſuch as are the moſt brilliant and the leaſt adulterated. The ground being painted thin next the hair, will give the ſtudent an opportunity of painting the edges of the hair over in a light and free manner when he gives the finiſhing touches.

The ſtudent having proceeded thus far, the face, hair, and back-ground being entirely covered, he muſt carefully view the whole at ſome diſtance, remarking in what

reſpect

reſpect it is out of keeping; that is, what parts are too light, and what too dark, being particularly attentive to the white or chalky appearances, which muſt be ſubdued with lake and carmine. The above method being properly put into execution, will produce the appearance of a painting principally compoſed of three colours, viz. carmine, black, and white; which is the beſt preparation a painter can make for the producing a fine crayon picture.

The next ſtep is to complete the back-ground and the hair; as the duſt in painting theſe will fall on the face, and would much injure it if that was completed firſt. From thence proceed to the forehead, finiſhing downward till the whole picture is completed.

Back-grounds may be of various colours; but it requires great taſte and judgment to ſuit them properly to different complexions. In general, a ſtrong-coloured head ſhould have a weak and tender tinted ground; and, on the contrary, a delicate complexion ſhould be oppoſed with ſtrong and powerful tints, by which proper contraſt between the figure and the back-ground, the picture will receive great force, and ſtrike the ſpectator much more than it poſſibly could do was this circumſtance of contraſt not attended to.

Young painters often treat the back ground of pictures as a matter of very little or no conſequence, when it is moſt certain great part of the beauty and brilliancy of the picture, eſpecially the face, depends upon the tints being well ſuited, the darks kept in their proper places, and the whole being perfectly in ſubordination to the face. Thus a ſimple back-ground requires attention;

but the difficulty is ſtill greater when a variety of objects are introduced; ſuch as hills, trees, buildings &c. in theſe caſes one rule muſt be ſtrictly attended to, that each grand object be diſpoſed ſo as to contraſt each other; this is not meant merely reſpecting their forms, but their colour, their light, ſhade, &c. For inſtance, we will ſuppoſe the figure receiving the ſtrongeſt light; behind the figure, and very near at hand, are the ſtems of ſome large trees; theſe muſt have ſhade thrown over them, either from a driving cloud, or ſome other interpoſing circumſtance; behind theſe ſtems of trees, and at a diſtance, are ſeen trees on a riſing ground; theſe ſhould receive the light as a contraſt to the former, &c. If an architectural back-ground be choſen, the ſame rule muſt be applied. Suppoſe a building at a moderate diſtance is placed behind the figure receiving the light, a column, or ſome other object in ſhadow ſhould intervene, to preſerve proper decorum in the piece, or what will have the ſame effect, a ſhadow muſt be thrown over the lower part of the building, which will give equal ſatisfaction or repoſe to the eye. It muſt be remembered, the light muſt be always placed againſt the dark, and the weak againſt the ſtrong, in order to produce force and effect; and *vice verſa*.

In painting over the forehead the laſt time, begin the higheſt light with the moſt faint vermillion tint, in the ſame place where the faint carmine was firſt laid, keeping it broad in the ſame manner. In the next ſhade ſucceeding the lighteſt, the ſtudent muſt work in ſome light blue tints, compoſed of verditer and white, intermixing with them ſome of the deeper vermillion tints, ſweetening them together with great caution (this direction is for the fineſt complexions; but the ſtudent muſt vary his colouring

colouring according to his ſubject) inſenſibly melting them into one another, increaſing the proportion of each colour as his judgment ſhall direct. Some brilliant yellows may alſo be uſed, but ſparingly; and towards the roots of the hair, ſtrong verditer tints, intermixed with greens, will be of ſingular ſervice. Cooling crayons, compoſed of black and white, ſhould ſucceed theſe, and melt into the hair. Beneath the eyes, the pleaſing pearly tints are to be preſerved, compoſed of verditer and white; and under the noſe and on the temples the ſame may be uſed; beneath the lips, tints of this kind alſo are proper, mixing them with the light greens and ſome vermillion.

The introduction of greens and blues into the face, in painting, has often given ſurpriſe to thoſe who are unacquainted with the art; but there is reaſon ſufficient for their introduction (though it may appear ſtrange at firſt) in order to break and correct the other colours.

The carmine predominating in the dead colour, is, as has been obſerved, the beſt preparation for the ſucceeding tints; the crudeneſs of this preparation muſt be corrected by variouſly intermixing greens, blues, and yellows: which of theſe are to be uſed is to be determined by the degree of carmine in the dead colour, and the complexion intended. The blue and yellow are of a nature diametrically oppoſite, and ſerve to correct the reds, and oppoſe one another; the greens being compounded of both theſe colours, are of peculiar uſe in many caſes where the tranſition is not to be ſo violent.

The ſtudent attentively conſidering nature, will diſcover a pleaſing variety of colours on the ſurface, and diſcernable thro' a clear and tranſparent ſkin; this variety

riety will be ſtill increaſed by the effect of light and ſhade; he will perceive one part inclining to the vermillion red, another to the carmine or lake; one to the blue, this to the green, and that to the yellow, &c. In order to produce theſe different effects, he will apply thoſe colours to which the tints are moſt inclined; yet in crayon-painting it is often beſt to compound the mixed colours upon the picture, ſuch as blue and yellow inſtead of green; blue and carmine inſtead of purple; red and yellow inſtead of orange: in other circumſtances the compounds already mixed ſhould be uſed; but in this caſe there can be no abſolute rule given, it muſt be left to the experience and diſcretion of the painter, though the ſtudent may be greatly aſſiſted in the commencement of his ſtudies, by an able maſter to direct and point out the beſt method to treat circumſtances of this nature as they occur in practice; which may at firſt appear obſcure and myſterious, but will ſoon, to a good capacity become demonſtrably clear upon certain and ſure principles. The circumſtances that require different treatment are ſo various and ſo many, as to render it impoſſible for me here to deſcend to every particular.

In finiſhing the cheeks, let the pure lake clear them from any duſt contracted with the other crayons; then with the lake may be intermixed the bright vermillion; and laſt of all (if the ſubject ſhould require it) a few touches of the orange-coloured crayon, but with extreme caution. After this, ſweeten that part with the finger as little as poſſible, for fear of producing a heavy diſagreeable effect on the cheeks, as the beauty of a crayon picture conſiſts in one colour ſhewing itſelf through, or rather between another; this the ſtudent cannot too often remark,

remark, it being the only method of imitating beautiful complexions.

The eye is the moſt difficult feature to execute in crayons, as every part muſt be expreſſed with the utmoſt nicety to appear finiſhed: at the ſame time the painter muſt preſerve its breadth and ſolidity while he is particularizing the parts. To accompliſh this, it will be a good general rule for the ſtudent to uſe his crayon in ſweetening as much, and his finger as little, as poſſible. When he wants a point to touch a ſmall part with, he may break off a little of his crayon againſt the box, which will produce a corner fit to work with in the minuteſt parts. If the eye-laſhes are dark he muſt uſe ſome of the carmine and brown oker, and the crayon of carmine and black; and with theſe he may touch alſo the iris of the eye (if brown or hazel) making a broad ſhadow, cauſed by the eye-laſh. Red tints of vermillion, carmine, and lake, will execute the corners of the eye properly; but if the eye-lids are too red, they will have a diſagreeable ſore appearance. The pupil of the eye muſt be made of pure lamp-black; between this and the lower part of the iris, the light will catch very ſtrong; but it muſt not be made too ſudden, but be gently diffuſed round the pupil till it is loſt in ſhade. When the eye-balls are ſufficiently prepared, the ſhining ſpeck muſt be made with a pure white crayon, which ſhould be firſt broken to a point, and then laid on firm; but as it is poſſible they may be defective in neatneſs, they ſhould be corrected with a pin, taking off the redundant parts, by which means they may be formed as neat as can be required.

The difficulty with reſpect to the noſe, is to preſerve the lines properly determined, and at the ſame time ſo artfully

artfully blended into the cheek, as to expreſs its projection, and yet no real line to be perceptible upon a cloſe examination. In ſome circumſtances it ſhould be quite blended with the cheek, which appears behind it, and determined entirely with a ſlight touch of red chalk. The ſhadow cauſed by the noſe is generally the darkeſt in the whole face, partaking of no reflection from its ſurrounding parts. Carmine and brown oker, carmine and black, and ſuch brilliant crayons, will compoſe it beſt.

The ſtudent having before prepared the lips with the ſtrongeſt lake and carmine, &c. muſt, with theſe colours, make them completely coreƈt, and, when finiſhing, introduce the ſtrong vermillions; but with great caution, as they are extremely predominant: this, if properly touched, will give the lips an appearance equal, if not ſuperior, to thoſe executed in oils, notwithſtanding the ſeeming ſuperiority the latter has, by means of glazing; of which the former is entirely deſtitute.

When the ſtudent paints the neck, he ſhould avoid expreſſing the muſcles too ſtrong in the ſtem, nor ſhould the bones appear too evident on the cheſt, as both have an unpleaſing effeƈt, denoting a violent agitation of the body: a circumſtance ſeldom neceſſary to expreſs in portrait painting. The moſt neceſſary part to be expreſſed, and which ſhould ever be obſerved (even in the moſt delicate ſubjeƈts) is a ſtrong marking juſt above the place where the collar-bones unite: and if the head is much thrown over the ſhoulders, ſome notice ſhould be taken of the large muſcle that riſes from behind the ear, and is inſerted into the pit between the collar-bones. All inferior muſcles ſhould be, in general,

general, quite avoided. The ſtudent will find this caution neceſſary, as moſt ſubjects, eſpecially thin perſons, have the muſcles of the neck much more evident than would be judicious to imitate. As few necks are too long, it may be neceſſary to give ſome addition to the ſtem,—a fault on the other ſide being quite unpardonable;—nothing being more ungraceful than a ſhort neck. In colouring the neck, let him preſerve the ſtem of a pearly hue, and the light not ſo ſtrong as on the cheſt. If any part of the breaſt appears, its tranſparency muſt alſo be expreſſed by pearly tints; but the upper part of the cheſt ſhould be coloured with beautiful vermilions, delicately blended with the other.

Of Drapery.

PAINTING the drapery is commonly thought to be a very inferior branch of the art:—this is, moſt certainly, a miſtake. A very great painter being aſked what part of the picture he thought moſt difficult to execute, anſwered, The drapery. Whether we allow this to be abſolutely true or not, we may venture to affirm, That it is a very difficult part to execute with taſte. Merely to give the effect, of ſilk, ſatin, or cloth, &c. is not the point; this, the ſervile copyiſt, by the mere dint of labour may effect, and even deceive the vulgar eye, ſo that the imitation may be taken for reality; but to make the folds give grace and dignity to the figure, to clothe it uninfluenced by prejudice, faſhion, or caprice ſo as to bear the teſt of ages, requires the fulleſt exertion of true genius, and the ſtudy of a man's life: therefore, a full deſcription here would be too prolix; ſo I ſhall leave the ſtudent to perfect it with great diligence and care.

Of the Materials.

THE perfection of the Crayons conſiſts, in a great meaſure, in their ſoftneſs; for it is impoſſible to execute a brilliant picture with them if they are otherwiſe: on which account great care ſhould be obſerved in the preparing them, to prevent their being hard. In all compoſitions, flake-white and white-lead ſhould be wholly rejected, becauſe the ſlighteſt touch with either of theſe will unavoidably turn black.

The uſual objection to crayon-paintings is, that they are ſubject to change; but whenever this happens, it is intirely owing to an injudicious uſe of the above-mentioned whites, which will only ſtand in oils. To obviate the bad effects ariſing from the uſe of ſuch crayons, let the ſtudent make uſe of the common whiting, prepared in the following manner:

Take a large veſſel of water, put the whiting into it, and mix them well together; let this ſtand about half a minute, and then pour off the top into another veſſel, and throw the gritty ſediment away; let what is prepared reſt about a minute, and then pour it off as before; which will purify the whiting and render it free from all dirt and grittineſs. When this is done, let the whiting ſettle, and then pour the water from it: after which, lay it on the chalk to dry, and keep it for uſe, either for white crayons, or the purpoſe of preparing tints with other colours; for with this all the other tints may be ſafely prepared. If the ſtudent chuſes to make crayons of the whiting immediately after it is waſhed, it is not neceſſary to dry it on the chalk; for it may be mixed

inſtantly

inſtantly with any other colour, which will ſave conſiderable trouble. All colours of a heavy, or gritty nature, eſpecially blue verditer, muſt be purified by waſhing after this method.

The ſtudent muſt be provided with a large flexible pallet-knife, a large ſtone and muller to levigate the colours, two or three large pieces of chalk to abſorb the moiſture from the colours after they are levigated, a piece of flat glaſs to prevent the moiſture from being abſorbed too much, till the colours are rolled into form, and the veſſels for water, ſpirits, &c. as neceſſity and conveniency ſhall direct.

REDS.

Carmine and Lake.

IT is rather difficult to procure either good carmine or good lake. Good carmine is inclined to the vermilion tint, and ſhould be an impalpable powder; and good lake to the carmine tint.

The carmine crayons are prepared in the following manner:

As their texture is inclinable to hardneſs, inſtead of grinding and rolling them, take a ſufficient quantity of carmine, lay it upon a grinding-ſtone, mix it with a levigating knife with ſpirits of wine, till it becomes ſmooth and even; yet the leſs friction produced by the knife the better. The chalk-ſtone being ready, lay the colour upon it to abſorb the ſpirit; but be careful that it is laid on in a proper ſhape for painting. If it is levigated tooth in, the crayons will be too flat; and if too thick, it will occaſion a waſte of colour, by their adhering

hering to the pallet-knife; but practice will render the proper degree of conſiſtency familiar.

When thus made, if the carmine crayons ſhould prove too hard, they muſt be reduced to an impalpable powder in a mortar, and again mixed in the ſame manner till ſoft enough for uſe, which will not be if the carmine be ground by the muller with any fluid.

The ſimple colour being prepared, the next ſtep is to compoſe the different tints by a mixture with whiting: the proportion to be obſerved conſiſting of twenty gradations to one, which may be clearly underſtood by the following directions: Take ſome of the ſimple colour, and levigate it with ſpirits of wine, adding about one part of waſhed whiting to three parts of carmine; of which, when properly incorporated, make two parcels. The next gradation ſhould be compoſed of equal quantities of carmine and whiting, of which four crayons may be made. The third compoſition ſhould have one-fourth carmine, and 3-4ths whiting; of this make ſix crayons, which will be a good proportion with the reſt. The laſt tint ſhould be made of whiting, very faintly tinged with carmine; of which make about eight crayons, which will complete the above-mentioned proportion. As theſe compound tints are levigated, they are to be laid immediately upon the chalk, that the moiſture may be abſorbed to the proper degree of dryneſs for forming into crayons; which may be known by its loſing the greateſt part of its adheſive quality when taken into the hand. If the conſiſtency is found to be right, it may be then laid upon the glaſs, which having no pores, will prevent the moiſture from becoming too dry before it is convenient to form it into crayons, otherwiſe the crayons would

would be full of cracks and very brittle; which will be a great inconvenience when they are uſed in painting.

N. B. Though theſe tints made with whiting may be rolled, yet the pure carmine will not bear it, but muſt be left on the chalk-ſtone till perfectly dry.

Lake

IS a colour very apt to be hard; to prevent which the ſtudent muſt obſerve the following particulars:

Take about half the quantity of lake intended for the crayons, and grind it very fine with ſpirits of wine; let it dry, and then pulverize it, which is eaſily done if the lake is good; then take the other half, and grind it with ſpirits, after which mix it with the pulverized lake, and lay it out directly in crayons on the chalk. The colour will not bear rolling. The ſimple colour being thus prepared, proceed with the compound crayons, as directed before, and in the ſame degrees of gradation as the carmine tints. If theſe ſhould prove too hard when made, let them be again pulverized, and treated as the carmine.

Vermilion.

THE beſt is inclined to the carmine tint. To prepare this colour, mix it on the ſtone with ſoft water or ſpirits, after which it may be rolled into crayons. It is ſometimes indeed inclined to be ſo very ſoft, as to return again to powder, and cannot be held in the fingers; which may be remedied by mixing it up with thin water-

water-gruel well ſtrained, which will give ſufficient coheſion. The different tints are produced by a mixture of the ſimple colour with whiting, according to the proportions already given.

BLUES.

Pruſſian Blue

IS a colour very apt to bind, and is rendered ſoft with more difficulty than carmine and lake. The ſame method of preparation is to be followed with this as directed with reſpect to lake, only it is neceſſary to grind a large quantity of the pure colour, as it is chiefly uſed for painting draperies. The different tints may be made according to neceſſity, or the fancy of the painter.

Biue Verditer

IS a colour naturally gritty, and therefore it is neceſſary to waſh it well. Its particles are ſo coarſe as to require ſome binding matter to unite them, otherwiſe the crayons will never adhere together. To accompliſh this, take a quantity ſufficient to form two or three crayons, to which add a piece of ſifted plaſter of Paris, about the ſize of a pea; mix theſe well together, and form the crayons upon the chalk. This blue is extremely brilliant, and will be of great uſe in heightening draperies, &c. The tints muſt be formed with whiting, as directed in the former inſtances; and are highly ſerviceable for painting fleſh, to produce thoſe pearly tints ſo beautiful in crayon pictures. It is not neceſſary

neceſſary to mix the compounds with ſpirits, as clear water will be ſufficient.

GREENS.

BRILLIANT greens are produced with great difficulty; which may be procured of thoſe who make it their buſineſs to prepare them: yet the following compoſitions will be found uſeful.

Theſe brilliant crayons will be neceſſary for the ſtudent to complete his ſet with, of which he will find great want both in the browns and deep reds, as well as in the greens; but in general he ſhould be careful what white or light crayons he uſes, that they are not compounded by the maker with flake-white, a trial may be made of one of them thus: — Bruiſe the crayon to a powder between the finger and thumb, and mix it with an equal quantity of charcoal duſt; put this into a crucible, which muſt be placed in a fierce fire, till the charcoal duſt is conſumed; and if the crayon be made with flake-white, the lead will return to its original metallic ſtate: conſequently theſe light crayons are not fit for uſe in this climate, as the leaſt damp will make them turn black; yet, notwithſtanding, the dark colours will be perfectly good, and may be uſed without danger.

Take yellow ochre, and after grinding it with ſpirits, mix it with the powder of Pruſſian blue, then temper it with a knife, and lay the crayons on the chalk, without rolling them: beſides this, uſe king's yellow, mixed with Pruſſian blue, brown ochre, and Pruſſian blue. Roman ochre and Pruſſian blue, mixed in different proportions,

will

will be uſeful. The crayons made of theſe laſt may be rolled. Various tints may be produced by theſe colours, according to fancy or neceſſity; ſome to partake more of the blue, and others of the yellow.

YELLOWS.

King's Yellow

IS the moſt uſeful and moſt brilliant, levigated with ſpirits of wine, to compoſe the different tints, as before directed. Yellow ochre and Naples yellow, ground with ſpirits, will make uſeful crayons.

Orange

IS produced by King's yellow, and vermilion, ground together with ſpirits, and the tints formed as in other caſes; but no great quantity of them is required.

BROWNS.

Cullen's Earth

IS a fine dark brown. After ſix or eight of the ſimple crayons are prepared, ſeveral rich compound tints may be produced from it, by a mixture with carmine, in various degrees; black, carmine, and this colour, mixed together, make uſeful tints for painting hair; ſeveral gradations may be produced from each of theſe, by a mixture with whiting; Roman and brown ochre are excellent colours, either ſimple or compounded with carmine. Whiting tinged, in ſeveral

degrees,

degrees, with either of theſe, will prove very ſerviceable in painting; common ſea-coal, ground and mixed with carmine, is a fine brown.

Umber

MAY be treated in the ſame manner as above, only it is neceſſary to levigate it with ſpirits of wine.

PURPLES.

PRUSSIAN blue ground with ſpirits, and mixed with pulverized lake, will produce a good purple. Carmine thus mixed with Pruſſian blue, will produce a purple ſomething different from the former. Various tints may be made from either of theſe compounds, by a mixture with whiting.

BLACK.

Lamp-Black

IS the only full black that can be uſed with ſafety, as all others are ſubject to mildew; but as good lamp-black is very ſcarce, the ſtudent will, perhaps, find it moſt expedient to make it himſelf, the proceſs of which is as follows:

Provide a tin cone, fix it over a lamp at ſuch a height, that the flame may juſt reach the cone for the ſoot to gather

within it. When a ſufficient quantity is collected, take it out, and burn all the greaſe from it in a crucible. It muſt then be ground with ſpirits, and laid on the chalk to abſorb the moiſture. Various grey tints may be formed from this by a mixture with whiting, as mentioned in former inſtances. Black chalk ground, is a very good blue black.

Carmine and black is another good compound, of which five or ſix gradations ſhould be made, ſome partaking more of the black, and others having the carmine moſt predominant, beſides ſeveral tints by a mixture with whiting.

Cinabar and black is alſo a very uſeful compound, from which ſeveral different tints ſhould be made.

Pruſſian blue and black is another good compound, and will be found of ſingular ſervice in painting draperies.

It is impoſſible to lay down rules for the forming every tint neceſſary in compoſing a ſet of crayons, there being many accidental compoſitions, entirely dependent on fancy and opinion. The ſtudent ſhould make it a rule to ſave the leavings of his colours, for of theſe he may form various tints, which will occaſionally be uſeful.

N. B. The Cologn or Cullen's earth, yellow oker, brown oker, Roman oker, Naples yellow, umber, black chalk, and ſea-coal duſt, are all ſubject to throw out a white kind of ſalt, which will injure the picture, if the following method of treating them be not ſtrictly obſerved: grind them extremely fine with water, and ſeparately put them into a large glazed veſſel, filled with boiling water. After

the

the colour has been well ſtirred, leave it to precipitate; then pour off the water, which will take away the ſalts, and leave the colour excellently prepared for making crayons after it has been dried on the chalk-ſtone and pulverized.

Of rolling the Crayons, and diſpoſing them for Painting.

THE different compoſitions of colours muſt be cut into a proper magnitude after they are prepared, in order to be rolled into paſtils for the convenience of uſing them. Each crayon ſhould be formed in the left hand with the ball of the right, firſt formed cylindrically, and then tapered at each end. If the compoſition is too dry, dip the finger in water; if too wet, the compoſition muſt be laid upon the chalk again, to abſorb more of the moiſture. The crayons ſhould be rolled as quick as poſſible; and when finiſhed, muſt be laid upon the chalk again, to abſorb all remaining moiſture. After the gradation of tints from one colour are formed, the chalk and the grinding-ſtone ſhould be well ſcraped and cleanſed with water before it is uſed for another colour.

When the ſet of crayons is compleated according to the rules preſcribed, they ſhould be arranged in claſſes for the convenience of painting with them. Some thin drawers, divided into a number of partitions, is the moſt convenient method of diſpoſing them properly. The crayons ſhould be depoſited according to the ſeveral gradations of light. The bottom of the partitions muſt be covered with bran, as a bed for the colours, becauſe it not only preſerves them clean, but prevents their breaking.

The box made uſe of when the ſtudent paints, ſhould be about a foot ſquare, with nine partitions. In the upper corner, on the left hand, (ſuppoſing the box to be in the lap when he paints) let him place the black and grey crayons, thoſe being the moſt ſeldom uſed; in the ſecond partition, the blues; in the third, the greens and browns; in the firſt partition on the left hand of the ſecond row, the carmines, lakes, vermilions, and all deep reds; the yellows and orange in the middle, and the pearly tints next; and as theſe laſt are of a very delicate nature, they muſt be kept very clean, that the gradations of colour may be eaſily diſtinguiſhed: in the loweſt row, let the firſt partition contain a piece of fine linen rag to wipe the crayons with while they are uſing; the ſecond, all the pure lake and vermilion tints; and the other partition may contain thoſe tints, which, from their complex nature, cannot be claſſed with any of the former.

Receipts for thoſe who paint in WATER-COLOURS.

Two Methods to make Gum-Water.

1. DISSOLVE one ounce of pure white gum-arabic, and half an ounce of double-refined ſugar, in a quart of ſpring water; ſtrain it through a fine ſieve or a piece of muſlin, and bottle it off for uſe, keeping it free from duſt.

2. Take ſome gum-arabic of the whiteſt ſort, bruiſe it, and tie it up in a piece of woollen-cloth, and ſteep it in ſpring water in a glaſs or earthen veſſel, till it be diſſolved. If it be too ſtiff, add more water; and if too thin, more gum.

With

With this water you may temper moſt of your colours; uſing ſuch a quantity, that being touched when dry, the colour will not come off. If the colour ſhines, there is too much gum in it.

To make Liquid Gold for Vellum Painting, &c.

GRIND the fineſt leaf-gold with ſtrong gum-water very fine, adding as you grind it more gum-water as you ſee neceſſary. When you have ground it as fine as you can, waſh it in a large ſhell; then temper it with a little mercury-ſublimate, bind it in the ſhell with a little diſſolved gum, ſhake and ſpread it equally all over the ſhell, and uſe it with fair water only. Thoſe who do not chuſe to make, may buy the ſhells ready prepared, at the colour ſhops, at a very low price,

To make Liquid Silver for the ſame Purpoſe.

THE proceſs for this is the ſame with that of liquid gold, only obſerving in the uſing it to temper it with glare of eggs inſtead of water.

To make the Glare of Eggs.

TAKE the whites, and beat them with a ſpoon till they riſe in a foam; let them ſtand all night, and they will be clarified into good glare.

Of

Of Colours proper for waſhing Maps.

COLOURS for waſhing maps may be made by boiling different kinds of wood, and ſtaining ſubſtances, as logwood, Brazil, cochineal, madder, turnſal, &c.

To keep the Colours from ſinking.

BOIL four ounces of roach-allum in a pint of ſpring water, till it is thoroughly diſſolved; then filter it through brown paper, and keep it for uſe.

Before you lay on your colours, take a ſponge, and wet the back of your paper with this water while it is hot. This will not only prevent the colours from ſinking, but will likewiſe give them an additional beauty and luſtre, and preſerve them from fading. If your paper is not good, it muſt be waſhed three or four times with this water, drying it every time.

To make Size for painting Scenes, and other Candle-Light Pieces.

STEEP a quarter of a pound of the cuttings of white glove-leather in water for ſome time: then take them out, and boil them in three quarts of water, till it waſtes to a pint, and ſtrain it through a cloth into an earthen pan. When the ſize is cold, if it feel firm under your hand, it is ſtrong enough. You may prepare any colours in this ſize while it is warm, and it will take off the glare which would

appear upon them by candle-light, if mixed with gum-water.

How to make a Compoſition to waſh Braſs ſo as to look like Silver.

TAKE ſilver, or gold-lace, half an ounce, add thereto one ounce of double refined aquafortis, put them in an earthen pot, and place them over a gentle fire till all be diſſolved, which will happen in about five minutes; then take it off, and mix it in a pint of clear water, after which, pour it into another clean veſſel to free it from grit or ſediment; and then add a ſpoonful of ſalt, and the green water will immediately let go the ſilver particles, which will form themſelves into a white curd; then pour off the water, and throw it away, for it is of no further uſe. The white curd muſt then be mixed with two ounces of ſalt of tartar, half an ounce of whiting, and a large ſpoonful of ſalt, more or leſs, according as you find it for ſtrength. Mix it well up together, and it is ready for uſe.

How to Silver Braſs, &c.

HAVING well cleared the braſs from all ſcratches (otherwiſe it will ſpoil its appearance) rub it over with a piece of old hat and rotten-ſtone, to clear it from all greaſineſs, then rub it with ſalt and water with your hand; then take a little of the before-mentioned compoſition on your finger, and rub it over where the ſalt has touched, and it will adhere to the braſs, and appear as well as ſilver; after which, waſh and ſteep it in plenty of clear water, to kill the


the aquafortis which remained in the compoſition; and, when dried with a clean hot rag, it is then ready to be varniſhed.


To make white Varniſh for Braſs.

TAKE ſpirits of wine (highly rectified) one pint, which, divide into four parts; then mix one part with half an ounce of gum maſtic, in a phial by itſelf; one part ſpirits, and half an ounce of gum ſandarach in another phial; one part ſpirits, and half an ounce of the whiteſt parts of gum benjamin; then mix and temper them to your mind. No rule can further inſtruct you, unleſs the quality of the gums and ſpirits could be aſcertained. It would not be amiſs to add a very little bit of white roſin, or clear Venice turpentine, in the maſtic bottle, it will aſſiſt in giving a gloſs: if your varniſh ſhould prove ſtrong and thick, add clear ſpirits, if too hard, pour from the maſtic bottle, if too ſoft, a little from the ſandarach, or benjamin. When you have brought it to a proper temper and ready for uſe, warm the ſilvered plate (if a clock face, not too hot ſo as to melt the wax) before the fire, or upon a hot heater, and with a flat camel's-hair bruſh, or clean linen rag lapped up, and dipped in the varniſh, ſtroke it quickly over, until no white ſhades appear, and it will preſerve the ſilver on many years.

To make Pulvis Fulminans, or Thunder Powder.

MIX three parts of ſalt petre, two parts of ſalt of Tartar, and one part of flowers of ſulphur well together; put the

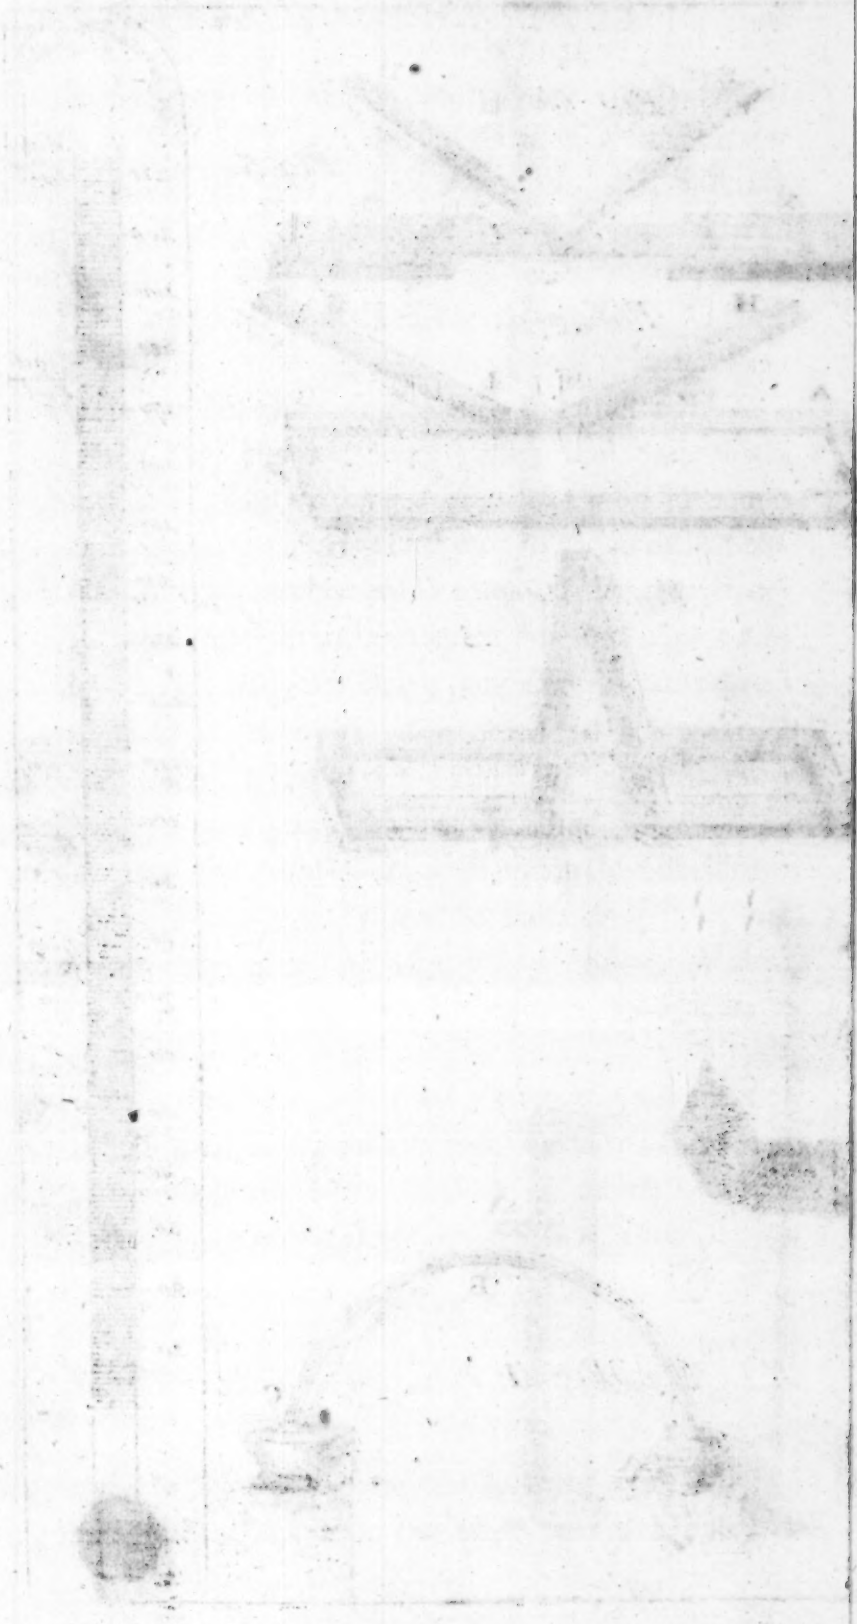

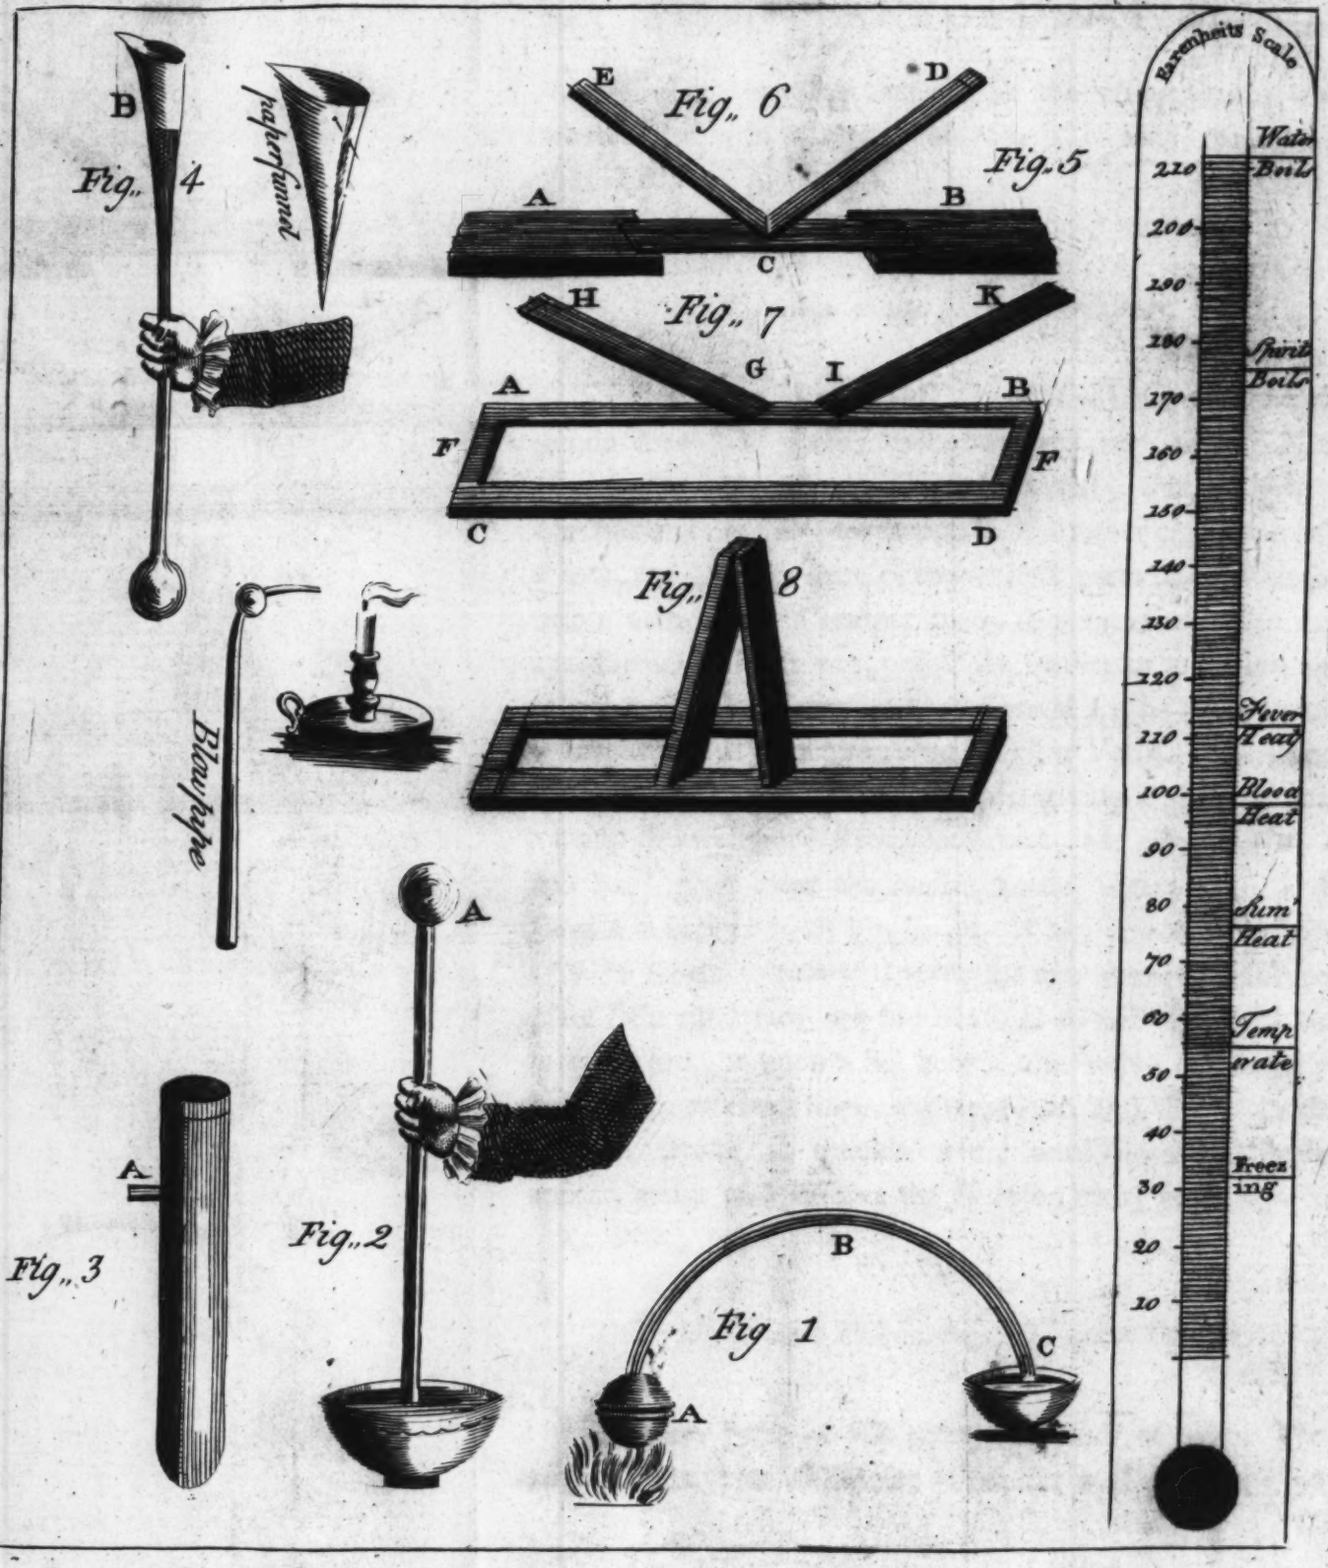
Fig. 4
B
Perfumed
Fig. 6
E
D
Fig. 5
A
B
C
Fig. 7
H
K
G
I
A
B
F
F
C
D
Fig. 8
Blowpipe
A
Fig. 2
A
Fig. 3
Fig 1
B
C
A
Farenheits Scale
Water Boil
Spirit Boils
Fever Heat
Blood Heat
Sum' Heat
Temp. rate
Freez ing
220
200
190
180
170
160
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10

the compoſition into a bottle, and cork it well to prevent the air from ſpoiling it, and it is ready for uſe.

When you uſe it, take as much as will lay upon a ſhilling, and putting it upon a fire-ſhovel over a gentle fire, it will preſently begin to ferment, and will make a horrible exploſion, like that of a gun. This experiment generally produces much diverſion, eſpecially when ignorant perſons are employed to hold the ſhovel. I never knew an inſtance of its doing any harm, when no more than the above quantity was uſed at once.

To cleanſe Mercury by Aquafortis.

PUT your mercury in a ſtrong glaſs-bottle, with a little clean ſand, and ſhake it well for ſome time; after which pour it into a baſon, and add thereto as many half ounces of double-refined aquafortis as you have pounds of mercury; let the aquafortis evaporate away, and it is then fit for uſe.

To refine Mercury, if mixed with other Metals.

MAKE an iron ball A, as repreſented Plate IV. Fig. 1. that is hollow, and will ſcrew in two halves in the middle; to one half muſt be fixed a pipe B, bended for the convenience of going into a veſſel of water, then put your metal in, and ſcrew it up, and place it on the fire, and the mercury will evaporate from the ball along the pipe into the veſſel of water C, and leave all the dregs behind.

A general Deſcription of making Thermometers.

1. BEING well provided with tubes, with bottles at the end of them, provide ſome good ſpirits of wine, with alkanate-root, and put it in the baſon, Fig. 2; then take the inſtrument, Fig. 3, which is a large iron tube, heat it red hot, and with a pair of tongs lay hold of it at A, and immerſe the ball A and tube Fig. 2, into it while hot, and it will drive the air out of the ball; then immediately immerſe it into the baſon, and the ſpirits will aſcend into the ball and fill it. If it ſhould not be quite full the firſt operation, it may be done a ſecond or third time.

How to fill a Tube with Mercury.

TAKE a tube, Fig. 4, and lap a paper-funnel on the top of it, and pour mercury into it until it covers the top B; then heat it as before, with the mercury in it, and the air will aſcend, and, as it were, ſeem to boil through the mercury; when obſerve, as ſoon as it has done boiling, take it out of the inſtrument, Fig. 3, and the mercury will deſcend into the ball until it be quite full: after which ſet it to cool to ſuch a degree of denſity, that the mercury will not ſettle into the ball in extreme froſt; then, by heating it a little, you may throw out as much ſuperfluous mercury as you find ſufficient: afterwards hermetically ſeal it with your blow-pipe and lamp, and it is ready to be applied to a ſcale.

Farenheit's ſcale is moſt generally in uſe, and the remarkable periods of heat are as follows: 212 water boils, 175 ſpirits of wine boils, 112 fever-heat, 98 blood-heat,

heat, 76 ſummer-heat, 55 temperate, 32 water freezes, 27 vinegar freezes, 20 ſtrong wines freezes, 0 the degree of cold produced by mixing ſnow and ſalt (ſee Scale, Fig. 5.) When you have filled your ball and tube to your ſatisfaction, before you hermetically ſeal the end, put the ball into boiling water, and obſerve how high it riſes; which part you muſt mark with a file, to a very great exactneſs: then let it ſettle to froſt, or (if froſt cannot be obtained) to the greateſt degree of cold you can, according to another good thermometer; which point alſo mark exactly; after which divide the intermediate points, and continue them downwards as in the ſcale, according to their reſpective places; then heat the mercury in the ball until it has forced all the air out of the tube, at which time inſtantly ſeal it by a blow-pipe and lamp. In order to facilitate the proceſs of ſealing the tube, it will be neceſſary to obſerve that the end of the tube ſhould be drawn out as ſmall as a hair, by means of a blow-pipe and lamp; when the mercury is forced by heat up to that ſmall part, applying the flame of a candle to the end at that time, will ſeal it without the help of a blow-pipe.

Thoſe who deſire a more accurate deſcription of the different ſcales, may be well inſtructed in Martin's Treatiſe on the Scales of Thermometers: it would be quite too copious to be inſerted here.

To make Silver Solder.

MELT fine ſilver two parts, braſs one part; don't keep them long in fuſion, leſt the braſs fly away in fumes.

Another for Coarſer Silver.

MELT four parts of fine ſilver, and three of braſs, throw in a little borax, and pour it out as ſoon as it is melted.

A Solder for Gold.

MELT copper one part, fine ſilver one part, and gold two parts; add a little borax when it is juſt melted, then pour it out immediately.

The Method of Soldering Gold or Silver.

AFTER the ſolder is caſt into an ingot, it would be more ready for uſe if you were to draw it into ſmall wire, or flat it between two rollers; after that cut it into little bits, then join your work together with fine ſoft iron-wire, and with a camel's hair-pencil dipt in borax, finely powdered and well moiſtened with water, touch the joint intended to be ſoldered; placing a little ſolder upon the joint, apply it upon a large piece of charcoal, and with a blow-pipe and lamp, blow upon it through the flame until it melts the ſolder, and it is done.

To cleanſe Silver after it is ſoldered.

MAKE it juſt red hot, and let it cool, then boil it in allum-water, in an earthen veſſel, and it will be as clean

as

as when new. If gold, boil it in urine, and ſal ammoniac.

A Solder for Lead.

TWO parts lead and one part tin: its goodneſs is tried by melting it, and pouring the bigneſs of a crown-piece upon the table; for if it be good, there will ariſe little bright ſtars in it. Apply roſin when you uſe this ſolder.

A Solder for Tin.

TAKE four parts pewter, one of tin, and one of biſmuth; melt them together, and run them into narrow thin lengths, and it is done.

A Solder for Iron.

NOTHING here is neceſſary but good tough braſs, with borax applied, mixed with water to the conſiſtence of paſte.

A Cement uſeful for Turners.

TAKE roſin one pound, pitch four ounces, melt theſe together, and while boiling hot add brick-duſt, until, by dropping a little upon a ſtone, you perceive it hard enough: then pour it into water, and immediately make it up in rolls, and it is fit for uſe.

Another

Another, finer than the laſt.

TAKE roſin one ounce, pitch two ounces, add red oker, finely powdered, until you perceive it ſtrong enough, and it is done.

Either of theſe cements are of excellent uſe to turners. By applying to the ſide of a chock, and making it warm before the fire, you may faſten any thin piece of wood, which will hold while you have turned it, by the cement; when you want it off again, ſtrike it on the top with your tool, and it will drop off immediately.

A Cement for Broken Pots, Glaſſes, &c.

TAKE quick lime, glare of eggs, and old thick varniſh; grind and temper well together, and it is ready for uſe.

A ſtrong Cement for Electrical Purpoſes.

MELT one pound of roſin in a pot or pan, over a ſlow fire, add thereto as much plaſter of Paris, in fine powder, as will make it hard enough, which you may ſoon know by trial; then add a ſpoonful of linſeed oil, ſtirring it all the time, and try if it be hard and tough enough for your purpoſe; if it is not ſufficiently hard, add more plaſter of Paris; and if not tough enough, a little more linſeed oil.

N. B.

N. B. I believe this to be as good a cement as is poſſible to be made for fixing the necks of globes, or any thing which is wanted ſtrongly fixed; for it is not very eaſy to melt again when cold.

Another, ſofter than the former.

TAKE roſin one pound, bees-wax one ounce, add thereto as much red oker as will make it of a ſufficient ſtiffneſs, pour it into water, and make it into rolls, and it is fit for uſe. This cement is uſeful in cementing braſs hoops on glaſſes, or any other mounting of electrical apparatus.

A Cement for Glaſs-Grinders.

TAKE pitch and boil it, add thereto, and keep ſtirring it all the while, fine ſifted wood-aſhes, until you have it of a proper temper; the addition of a little tallow may be added as you find neceſſary.

Another for Small Work.

TAKE ſix parts roſin, and one of bees-wax, melt them together, and if too ſoft, add more roſin; if too hard, add more bees-wax, &c.

A Cement

A Cement or Glue, that will hold very ſtrongly, either againſt Heat or Moiſture.

MIX and boil linſeed oil and quick lime together, till they become very thick, then pour them out, and make them into rolls or cakes, and they will prove very uſeful, applied to many purpoſes.

A good Glue for Sign-Boards, or any Thing that muſt ſtand the Weather.

MELT common glue with water to a proper conſiſtence; then add linſeed oil, with a little red lead, more or leſs as you ſee occaſion, and it will anſwer the purpoſe exceeding well.

To make a fine Glue, wherewith you may caſt curious Medals.

STEEP iſinglaſs in brandy, and when it is diſſolved, boil it together with water, and ſpread it over any medal, and when dry it will appear perfect. It muſt be of a tolerable thick conſiſtence, much like common glue.

To ſtain Wood Red.

TAKE archal one pound, add 1-4th oil of vitriol, and it is ready for uſe: to make it ſtrike deeper, add a little more oil of vitriol.

To Stain Blue.

DISSOLVE indigo, well bruiſed, one ounce, in a pound of oil of vitriol; ſet it near the fire for two or three days; keep ſtirring it about with a ſtick, then let it down to what ſtrength you pleaſe with water.

Yellow.

GAMBOGE, or turmeric, diſſolved in oil of vitriol.

A black Stain for Wood.

HEAT a ſteel-bar very hot, take it out of the fire, and ſmear it over with brimſtone, which will diſſolve a part of the ſurface; ſcrape it off, and repeat this operation till all the ſteel is quite diſſolved (or at leaſt as much as you intend to uſe) then beat it to a fine powder, and incorporate it with very ſtrong alegar or vinegar; add thereto blue nut-galls, and a little copperas and allum; but before you lay the ſtain on, it will be proper to ſtrike it over with boiling hot logwood-water.

To Stain Green.

DISSOLVE gamboge in water; add of the blue ſtain to it as you ſee occaſion. N. B. All the wood muſt be very white.

Blue Ink.

A little of the blue ſtain tempered with water, with the addition of a little gum arabic.

To make good common Ink.

IN four parts of water or beer let a pound of bruiſed galls be infuſed twenty-four hours, without boiling: to this add ſix ounces of gum arabic; and when the gum is diſſolved, ſix ounces of green vitriol, which will ſoon give it the black colour; the liquor is then to be ſtrained through a hair-ſieve.

Inks of all colours may be made by uſing a ſtrong decoction of the ingredients uſed for dying, mixed with a little allum and gum arabic. For example: A ſtrong decoction of Brazil-wood, with as much allum as it can diſſolve, and a little gum arabic to give it body and ſome conſiſtence, forms a beautiful red ink. Other ingredients may be added, viz. ſpirits to keep it from freezing, &c.

A Compoſition for Ornaments.

TAKE pounded chalk, what quantity you pleaſe; add thereto as much thin glue as will make it into paſte, which mix well together; then put it into moulds, being a little oiled, and preſs it well in; after which take it out, and it will grow as hard as ſtone. N. B. You muſt make no more of the compoſition than you

want

want for preſent uſe; for if it be left till it grows hard, it cannot be worked again.

To prove Spirits of Wine, whether they are fit for Varniſh.

TAKE ſome in a ſpoon, and put a little gunpowder in it; after which ſet it on fire with a candle or lighted paper; and if it fire the gunpowder when it has burnt itſelf dry, it may be depended on as good; if not, it is not fit for varniſh at all. The leſs of watery parts are in the varniſh, the ſooner it dries, and is fit for poliſhing; it is alſo more permanent, and will come to a better gloſs.

To make Seed-lac Varniſh.

TAKE ſpirits of wine, one quart; put it in a wide-mouthed bottle, add thereto eight ounces of ſeed-lac, which is large grained, bright and clear, free from dirt and ſticks; let it ſtand two days, or longer, in a warm place, often ſhaking it. Strain it through a flannel into another bottle, and it is fit for uſe.

To make Shell-lac Varniſh.

TAKE good ſpirits of wine one quart, eight ounces of the thinneſt and moſt tranſparent ſhell-lac, which, if melted in the flame of a candle, will draw out in the longeſt and fineſt hair; mix and ſhake theſe together, and let them ſtand in a warm place for two days, and it is ready for uſe. This varniſh is ſofter than that which

is made of ſeed-lac, therefore is not ſo uſeful; but may be mixed with it for varniſhing wood, &c.

To make a Lacker for Braſs.

TAKE eight ounces of ſpirits of wine, and one ounce of arnotto, well bruiſed; mix this in a bottle by itſelf; then take one ounce of gamboge, and mix it in like manner to the ſame quantity of ſpirits; alſo bruiſed ſaffron, ſteeped in ſpirits to nearly the ſame proportion; after this take ſeed-lac varniſh, what quantity you pleaſe, and you may brighten it to your mind by the above mixture. If it be too yellow, add a little more from the arnotto-bottle; and if it be too red, add a little more from the gamboge or ſaffron-bottle; if too ſtrong, add a little ſpirits of wine, &c. Thus you may temper lacker or varniſh to what degree of perfection you pleaſe.

To caſt Vegetables, Inſects, ſmall Birds, Frogs, Fiſh, &c. in Plaſter Moulds.

PROVIDE a trough of boards, nailed together ſo as not to let water run through the joints; ſuſpend in the trough by thread or Holland twine in ſeveral places, the vegetable plant, inſect, &c. which you would caſt; which being performed, mix four parts plaſter of Paris and two parts of fine brick-duſt with common water, to the conſiſtence of cream, and with this cover the thing intended to be caſt, obſerving not to diſtort it from its natural poſition if poſſible. When you have filled your trough, let it harden, by placing it near the fire by degrees, till you can make it red hot; then let it cool, and with a pair of bellows,

bellows, blow and ſhake as much of the aſhes out of the mould as you can. You muſt now put a ſmall quantity of quickſilver into the mould, and ſhake it, in order to looſen every part of the aſhes therein, alſo to make a paſſage through where the ſtrings were tied, in order to let the air out when you pour in your metal.

To prepare a Metal for the above Work.

TAKE of grain-tin 6, biſmuth 2, and lead 3 ounces; melt them together in an iron ladle, and you may caſt in the above mould to your ſatisfaction.

You may combine the above ingredients in ſuch proportions, as to compoſe a metal which will melt in boiling-water.

To caſt Convex or Concave Moulds of Medals on Tinfoil, with Plaſter of Paris.

TAKE a medal, &c. and cover it with very thin tinfoil, which preſs as cloſe to the medal as you can; go over every part with a bruſh, laying on tolerably hard, in order to preſs the tinfoil into every cavity of the medal; after which you may pour prepared plaſter upon it; and when it is hard take the medal out, leaving the tinfoil in the plaſter; then with a little fine olive-oil, anoint the tinfoil and the plaſter where it muſt part, and pour more plaſter upon the tinfoil, which alſo let harden; you may then ſeparate them, and take out the tinfoil, and you will have both a convex and concave mould.

Chemical

Chemical Tranſcolourations.

AMONG the moſt pleaſing as well as ſurprizing phenomena of nature, may be juſtly ranked the tranſcolourations produced by chemiſtry; and thoſe are the more pleaſing in general which are moſt eaſily executed.

Colours produced by the Mixture of colourleſs Fluids.

Red. Spirits of wine mixed with ſpirit of vitriol.

Orange. Solution of the mercury mixed with oil of tartar.

Yellow. Solution of ſublimate and lime-water.

Green. Tincture of roſes and oil of tartar.

Purple. Solution of copper and ſpirit of ſal ammoniac.

Blue. Tincture of roſes and ſpirit of wine.

White. Solution of ſublimate and ſpirit of ſal ammoniac.

Black. Solution of ſugar of lead and ſolution of vitriol.

Colours

Colours produced by the mixture of coloured Fluids.

Green. Tincture of ſaffron, which is yellow, mixed with tincture of red roſes.

Crimſon. Tincture of violets, which is blue, and ſpirit of ſulphur, which is brown.

Blue. Tincture of red roſes, which is red, and ſpirit of hartſhorn, which is browniſh.

Purple. Tincture of violets, which is blue, and ſolution of Hungarian vitriol, which is blue.

Violet. Tincture of violets, which is blue, and ſolution of copper, which is green.

Green. Tincture of cyanus (blue bottle-flower) which is blue, and ſpirit of ſal ammoniac coloured blue.

Yellow. Solution of Hungarian vitriol, which is blue, and lixivium, which is brown.

Black. Solution of Hungarian vitriol, which is blue, and tincture of red roſes.

Red. Tincture of cyanus, which is blue, and ſolution of copper, which is green.

Colours changed and reſtored.

SOLUTION of copper, which is green, is made colourleſs by ſpirit of nitre; and is reſtored again by oil of tartar.

Limpid infuſion of galls is made black by a ſolution of vitriol, and *tranſparent* again by oil of vitriol; and then black again by oil of tartar.

Tincture of red roſes is made black by a ſolution of vitriol, and becomes red again by oil of tartar.

A ſlight tincture of red roſes, by ſpirit of vitriol, becomes a fine red; then, by ſpirit of ſal ammoniac, turns green; and then, by oil of vitriol, becomes red again.

Solution of verdegris, which is green, becomes colourleſs by ſpirit of vitriol; then, by ſpirit of ſal ammoniac becomes purple; and then by oil of vitriol becomes colourleſs again.

Take antimony and grind it to powder, and it will become black. Let it be calcined with aqua regia, and it will be of a greeniſh yellow; and when ſublimed with ſal ammoniac it will be white, red, yellow, greeniſh, and black; of an uniform red when freed from its ſalt by water; but white when fixed with thrice its weight of nitre. Thus may be ſeen almoſt all the colours in one ſolid body.

Mercury

Mercury diſſolved by aquafortis, and diſtilled in a glaſs retort, affords likewiſe, in different parts of the glaſs, a variety of colours.

To turn an almoſt limpid liquor blue: pour ſpirits of ſal-ammoniac to a ſolution of verdigris in vinegar, and dilute it with water till it be almoſt limpid. To turn that blue liquor pellucid, add an acid to it, till the acid predominate.

To turn a very green liquor of a beautiful *violet* colour: to a high green ſolution of copper in vinegar, drop ſpirit of ſal-ammoniac till the alkali predominate.

To produce numerous *blues* and *greens* between a *deep* blue and a *deep* green: put a ſtrong and hot ſolution of copper in ſal-ammoniac, into a clear cylindrical glaſs, and add thereto, ſlowly, ſpirits of nitre, drop by drop. A different colour between the two degrees, will appear upon the addition of each drop.

Several of the above compoſitions when put in glaſs globes, and placed in a window with lamps behind them, make beautiful illuminations.

Sympathetic Inks.

By ſympathetic inks is meant thoſe ſorts of liquors with which any characters being written they remain inviſible, till ſome method is uſed to give them a colour. There are a great number of compoſitions for performing

the above, but I ſhall only mention a few, ſufficient to give a general idea of their nature and uſe.

1. Take one ounce of litharge of lead, incorporate it with twice the quantity of ſtrong diſtilled vinegar, and let it ſtand twenty four hours. Then ſtrain it off, and let it remain till it be quite ſettled. Preſerve this liquor in a bottle.

2. Take one ounce of orpiment in powder, add thereto two ounces of quick lime, put the ingredients into a pint bottle with as much water as will ſtand two fingers above them. Place the bottles in a warm place, and in twenty four hours the water will be ſtrongly impregnated; then pour the liquor gently off, and put it in a bottle well corked, and it is ready for uſe.

In preparing theſe liquors you muſt take care that they have no communication: for the vapour of the latter is ſufficient to deſtroy the limpidity of the former, and thereby render it unfit for uſe.

When you write with the former ink, the letters will be viſible, until you expoſe the vapours of the ſecond; thus you may read what was written as plain as if written with ink.

Another Sympathetic Ink.

1. Diſſolve green vitriol in common water, and add a ſmall quantity of nitrous acid, to prevent that yellowiſh precipitation that will otherwiſe be formed. The characters wrote in this diſſolution with a new pen will be inviſible.

2. Infuſe

2. Infuſe in three fourths of a pint of water, or white wine, two ounces of ſmall Aleppo galls, and at the end of two or three days pour the infuſion off: thus by drawing a pencil dipped in this infuſion over the letters wrote with the laſt diſſolution, they will appear of a beautiful black, eſpecially if the infuſion be ſtrong.

The letters wrote with the laſt diſſolution will become a fine blue; if they be wetted with water ſaturated with Pruſſian blue: and letters wrote with this water, which will be inviſible, will likewiſe turn to a fine blue, by being wetted with the above diſſolution.

Directions for making the beſt Compoſitions for the Metal of reflecting Teleſcopes: together with a Deſcription of the Proceſs of grinding, poliſhing, and giving the great Speculum the true parabolic curve.

THE perfection of the metal of which the Speculum ſhould be made, conſiſts in its hardneſs, whiteneſs, and compactneſs: for upon theſe properties, the reflective powers and durability of the Speculum depend.

The beſt compoſition for the Specula of reflecting Teleſcopes is as follows:

Take good Swediſh copper two pounds, and when melted, add fourteen ounces and a half of grain tin to it; then having taken off the ſcoria, caſt it into an ingot. This metal muſt be a ſecond time melted to caſt a Speculum; but it will fuſe in this compound ſtate with a ſmall heat, and therefore will not calcine the tin to putty; it ſhould be poured off as ſoon as it was melted, giving it no more

heat than is abſolutely neceſſary. It is to be obſerved, however, that the ſame metal, by frequent melting, loſes ſomething of its hardneſs and whiteneſs; when this is the caſe, it becomes neceſſary to enrich the metal by the addition of a little tin, perhaps in the proportion of half an ounce to a pound. And indeed when the metal is firſt made, if inſtead of adding the fourteen ounces and a half of tin to the two pounds of melted copper, about one ounce of the tin were to be reſerved and added to it in the ſucceeding melting, before it is caſt off into the moulds, the compoſition would be more beautiful, and the grain of it much finer: this I know by experience to be the caſe.

The beſt method for giving the melted metal a good ſurface is this: the moment before it is poured off, throw into the crucible a ſpoonful of charcoal duſt: immediately after which the metal muſt be ſtirred with a wooden ſpatula, and poured into the moulds.

The metal being caſt, there will be no occaſion for a complicated apparatus for grinding and poliſhing it. Four tools are all that are neceſſary, viz. the rough grinder to work off the rough face of the metal, a braſs convex grinder, on which the metal is to receive its ſpherical figure; a bed of hones which is to perfect that figure, and to give the metal a fine ſmooth face; and a concave tool or bruiſer, with which both the braſs grinder, and the hones are to be formed. A poliſher may be conſidered as an additional tool; but as the braſs grinder is uſed for this purpoſe, and its pitchy ſurface is expeditiouſly, and without difficulty, formed by the bruiſer, the apparatus is therefore not enlarged.

Of

Of Rough Grinding the Specula.

THE tool by which the rough ſurface of the metal is rendered ſmooth and fit for the hones, is beſt made of lead, ſtiffened with about a fifth or ſixth part of tin. This tool ſhould be at leaſt a third more in diameter than the metal which is to be ground; and for one of any ſize, not leſs than an inch thick. It may be cemented upon a block of wood, in order to raiſe it higher from the bench.

This leaden tool being caſt, muſt be fixed in the lathe, and turned as true as it is poſſible, by the gage, to the figure of the intended Speculum, make a hole or pit in the middle as a lodgment for the emery, of about an inch diameter for a metal of four inches: when this is done, deep grooves muſt be cut acroſs its ſurface with a graver, in the manner repreſented. Plate XVII. of the Introduction to Uſeful Knowledge. Fig. 3.

Theſe grooves will ſerve to lodge the emery, and by their means the tool will cut a great deal faſter. There is no occaſion to fear any alteration in the convexity of this tool by working the metal upon it, for the emery will bed itſelf in the lead, and ſo far arm the ſurface of it, that it will preſerve its figure and cut the metal very faſt. Any kind of a low handle, fixed on the back of the metal with ſoft cement, will be ſufficient; but it ſhould cover two thirds of its back to prevent its bending. This way of working will cut the metal tolerably faſt, and with more truth than any other method yet deſcribed.

When

When all the ſand-holes and irregularities on the face of the metal are ground off, and the whole ſurface is ſmooth and regularly figured, the Speculum is then ready for the braſs grinder, and muſt be laid aſide for the preſent.

The Manner of forming the Braſs grinding Tool.

Procure a round ſtout piece of Hamburgh braſs, at moſt, a ſixth part larger than the metal to be poliſhed, and let it be well hammered into a degree of convexity (by the aſſiſtance of a gage) ſuitable to the intended Speculum. Having done this, ſcrape and clean the concave ſide ſo thoroughly, that it may be well tinned all over; then caſt upon it, after it has been preſſed a proper depth into the ſand, the former compoſition of tin and lead, in ſuch quantity, that it may (for a Speculum of four inches diameter) be at leaſt an inch and an half thick, and with a baſe conſiderably broader than the top, in order that it may ſtand firmly upon the bench, in the manner hereafter to be deſcribed. This being done, it muſt be fixed and turned in the lathe with great care, and of ſuch a convexity as exactly to ſuit the concave gage, which we ſuppoſe already made. It will be neceſſary to be more careful in forming this than the former tool, and eſpecially that no rings be left from the turning, nor will the ſucceeding hone tool require ſo much exactneſs, as any defects in turning will, by a method hereafter mentioned, be eaſily remedied; but any inequality or want of truth in the braſs tool, will occaſion a great deal of trouble before it can be ground out by the emery. This tool muſt have a hole (ſomewhat leſs than that of the metal to be worked upon it) in the middle, quite through to the bottom.

bottom. When this tool is finiſhed off in the lathe, its diameter ſhould be one-eighth wider than the metal.

How to form the bed of Hones, or third Tool.

HAVING choſen the beſt blue-ſtone, ſuch as clock-makers uſe in poliſhing up their work (taking great care that there be no red veins in it, for ſuch veins are generally hardeſt, therefore, will prevent its wearing equal) it muſt be then cemented to a piece of ſtone or metal; if the blue-ſtone cannot be procured, as large as is required, in one piece, it may be joined together with cement, to the ſize required; after which, you muſt ſaw it into $\frac{3}{8}$ inch ſquares, and about one-eighth of an inch below the face of the ſtone, in order to carry off what wears off the ſtone, and likewiſe what grinds off the metal. The bed of hones ſhould be one-fourth part larger than the metal which is ground upon it, and turned as true as poſſible to a gage in a turner's lathe.

The Manner of forming the Bruiſer, the fourth and laſt Tool.

THIS tool ſhould be likewiſe made of thick ſtout braſs, like the former, perfectly ſound, about a quarter of an inch thick, hammered as near to the gage as poſſible. It ſhould be then ſcraped, cleaned, and tinned on the convex ſide, as the former tool was on the concave, and the ſame thickneſs of lead and tin caſt upon it. The general ſhape of this ſhould differ from the former; for as that increaſed in diameter at the bottom for the ſake of ſtanding firmly,

ſo

ſo this ſhould be only as broad at bottom as at top, as it is to be uſed occaſionally in both theſe poſitions. When this tool is fixed in the lathe, and turned off concave to the convex gage with great truth, its diameter ought likewiſe to be the middle ſize between the hones and the poliſher.

Having with the lathe roughly formed the convex braſs grinder, the beds of hones, and the concave bruiſers, the convex and concave braſs tools, and the metal, they muſt be wrought alternately and reciprocally upon each other, with fine emery and water, ſo as to keep them as nearly to the ſame figure as poſſible, in order to which, ſome waſhed emery muſt be procured. This is beſt done by putting it into a phial, which muſt be half filled with water, and well ſhaken up, ſo that, as it ſubſides, the coarſeſt may fall to the bottom firſt, and the fineſt remain at the top; and whenever freſh emery is laid on the tools, the beſt method (which we ſhould always obſerve with the putty in poliſhing) will be to ſhake the bottle gently, and pour out a ſmall quantity of the turpid mixture.

Of grinding the Speculum, the Braſs Tool, and the Bruiſer together.

All the tools being ready, upon a firm poſt in the middle of a room, you are to begin to grind the convex tool with the bruiſer upon it, working the latter croſs-ways with ſtrokes ſometimes acroſs its diameter, at others a little to the right and left, and always ſo ſhort, that the bruiſer may not paſs above half an inch within the ſurface of the braſs tool, either way, ſhifting the bruiſer round its

axis

axis every half dozen ſtrokes, or thereabouts. You muſt likewiſe every now and then, ſhift your own poſition by walking round, and working at different ſides of the braſs tool, at the times the ſtrokes ſhould be carried round and round, but not much over the tool: in ſhort, they muſt be directed in ſuch a way, and the whole grinding conducted in ſuch a manner, and with ſuch equability, that every part of both tools may wear equally. This habit of grinding, as well as the future one of poliſhing, may be ſoon acquired.

When you have wrought in this manner about a quarter of an hour with the bruiſer upon the tool, it will be then neceſſary to change them, and, placing the bruiſer upon its bottom, to work the convex tool upon that in the ſame manner.

When by working in this equable manner alternately with the bruiſer and tool, and occaſionally adding freſh emery, you have nearly got out all the veſtiges of the turning tool, and brought them both nearly to a figure, it will be then time to give the ſame form to the metal. This muſt be done by now and then grinding it upon the braſs tool with the ſame kind of emery, taking care, however, by working the two former tools frequently together, to keep all three exactly in the ſame curve. The beſt kind of handle for the metal is made of lead, a little more than double its thickneſs, and ſomewhat leſs in diameter, of about three pounds weight, with a hole in the middle a little larger than that in the metal: this handle ſhould be cemented on with pitch. The upper edge of this weight muſt be rounded off, that the fingers may not be hurt; and a groove

about the bigneſs of the little finger, be turned round juſt below it, for the more conveniently holding and taking the metal off the tools.

The Manner of Figuring the Metal upon the Hones.

WHEN the bruiſer, braſs tool, and metal, are all brought to the ſame figure, and have all a good ſurface, the next part of the proceſs is to give a correct ſpherical figure, and a fine face to the metal, upon the hones. It will be neceſſary to premiſe, however, that the hones ſhould be placed in a veſſel of water, with which they ſhould be quite covered for at leaſt an hour before they are uſed, otherwiſe they will be perpetually altering their figures when the metal comes to be ground upon them. The ſame precaution is alſo neceſſary, if you are called off from your work while you are grinding the metal, for if they be ſuffered to grow dry, the ſame inconvenience will ariſe.

In order to give a proper figure to the hones, and exactly ſuitable to that of the braſs tool, bruiſer, and metal. when the hones are fixed down to the block, ſome common flour of emery (unwaſhed) with a good deal of water, muſt be put upon them, and the bruiſer being placed upon the hones, and rubbed thereon with a gentle ſtroke and a light hand, the inequalities of the ſtone will be quickly worn off; but as a great deal of mud will be ſuddenly generated, it muſt be waſhed off every quarter of a minute, with a great deal of water. By a repetition of this two or three times, the hones (being of a ſoft and friable ſubſtance) will be cut down to the figure, without much wearing or altering

altering the bruiſer. Though buſineſs may be quickly done, and can be continued but for a few ſtrokes at a time; I need not ſay, that it is neceſſary that thoſe ſtrokes be carried in the ſame direction, and with the ſame care which was obſerved in grinding the two former tools together.

As ſoon as the hones have received the general figure of the bruiſer, and all the turning ſtrokes are worn out from them, the emery muſt be carefully waſhed off; in order to which, it will be neceſſary to clear it from the joints, with a bruſh, under a ſtream of water. The bruiſer and metal muſt be likewiſe cleared in the ſame manner, and with equal care, from any lurking particles of emery.

The hones being fixed down to the block, you now begin to work the bruiſer upon them, with very cautious, regular, ſhort ſtrokes, forward and backward, to the right and left, turning the axis of the bruiſer in the hand while you move round the hones, by ſhifting your poſition, and walking round the block. Indeed the whole now depends upon a knack in working, which ſhould be conducted nearly in the following manner: having placed the bruiſer on the center of the hones, ſlide it in an equable manner forward and backward with a ſtroke or two directly acroſs the diameter, a little on one ſide, and ſo on the other; then ſhifting your poſition an eighth part round the block, and having turned the bruiſer in your hand about as much, give it a ſtroke or two round and round, but not far over the edges of the hones, and then repeat the croſs ſtrokes as before: thoſe round ſtrokes (which ought not to be above two or three at moſt) are given every time you ſhift your

own poſition, and that of the metal, previous to the croſs ones, in order to take out any ſtripes either in the hones or bruiſer, which may be ſuppoſed to be occaſioned by the ſtraight croſs ſtrokes. During the time of working, no mud muſt be ſuffered to collect upon the hones, ſo as to deſtroy the perfect contact between the two tools; and therefore they muſt every now and then be waſhed clean, by throwing ſome water upon them. When by working in this manner, all the emery ſtrokes are ground off from the bruiſer, and it has acquired a good figure and clean ſurface, you may then begin with the metal upon the hones, in the ſame cautious manner, waſhing off the mud as faſt as it collects, though that will be much leſs now than when the bruiſer was ground upon them. Every now and then, however, the bruiſer muſt be rubbed gently and lightly upon the hones, which will as it were, by ſharpening them, and preventing too great ſmoothneſs, occaſion them to cut the metal much faſter.

When, after having ſome time cautiouſly wrought in the manner before deſcribed, the hone-pavement has uniformly taken out all the emery ſtrokes, and given a fine face and true figure to the metal, which will be pretty well known by the great equality there is in the feel while you are working, and by which an experienced workman will form a pretty certain judgment; having proceeded thus far, I ſay, you may then try your metal, and judge of its figure by this more certain manner.

Work the hone-pavement quite clean; then put the metal upon the center of it, and give two or three light ſtrokes round and round only, not carrying, however, the edges

edges of the metal much over the hones; this will take out the order of ſtraight ſtrokes; then having again waſhed the hones, and placed the ſpeculum upon their center, with a gentle preſſure, ſlide it towards you, till its edge be brought a little over that of the hones; then carry it quite acroſs the diameter as far as the other ſide, and having given the metal a light ſtroke or two in this direction, take it off the tool. The metal being wiped quite dry, place it upon a table at a little diſtance from a window; ſtand yourſelf as near the window at ſome diſtance from the metal, and looking obliquely on its ſurface, turn it round its axis, and you will ſee at every half turn the grain given by the laſt croſs ſtrokes flaſh upon your eye at once, over the whole face of the metal. This is a certain proof of a true ſpherical figure: For as there is nothing ſoft or elaſtic, either in the metal or in the hones, this glare is a certain proof of a perfect contact in every part of the two ſurfaces; which there could not be, if the ſpheres were not both perfect and preciſely the ſame.

Indeed there is one accidental circumſtance which neceſſarily affords its aid in this and every buſineſs of the like ſort; and this is, that a concave and convex ſurface ground together, though ever ſo irregular at firſt, will (if the working be uniform and proper, conſiſting, eſpecially at laſt, of croſs ſtrokes in every direction acroſs the diameter) be formed into portions of true and equal ſpheres; had it not been for this lucky neceſſity, it would have been impoſſible to have produced that correctneſs which is eſſential in the ſpeculum of a good reflecting teleſcope by any mechanic contrivance whatever. For when it is conſidered that the errors in reflection are four times as great as in refrac-

tion,

tion, and that the laſt defect in figure is magnified by the powers of the inſtrument; any thing ſhort of perfection in the figure of the ſpeculum, would be evidently perceived by a want of diſtinctneſs in the performance.

I muſt not, however, quit this article without obſerving, that I all along ſuppoſe, both in forming the tools, and at laſt figuring the metal (and indeed the ſame muſt be obſerved in the future proceſs of poliſhing) that no kind of preſſure is uſed that may endanger the bending, or irregularly grinding them; they ſhould, therefore, be held with a light hand, and looſely between the fingers, and the motion given ſhould be in an horizontal direction, with no more preſſure than their own dead weight.

Having now finiſhed the metal on the hones, and rendered it both in point of figure and ſurface, fit for the laſt and moſt eſſential proceſs, viz. that of poliſhing, I will deſcribe it in the beſt manner I can; though many little circumſtances which are unavoidably omitted (and which, at the ſame time, are frequently eſſential to the ſucceſs of a mechanic proceſs) can only be ſupplied by actual experience.

The poliſhing of the ſpeculum is the moſt difficult and eſſential part of the whole proceſs; for every experienced workman knows, to his vexation, that the moſt trifling error here will be ſufficient to ſpoil the figure of his metal, and render all his preceding caution uſeleſs.

I ſhall explain a method not only of giving the metal a parabolic figure, but alſo of recovering it when it happens

to

to be injured; both to be effected in the act of poliſhing, and the former as certainly as the ſpherical figure is given upon the hones.

Indeed, if we conſider rightly, poliſhing will be perceived to be but a kind of grinding with a finer order of ſtrokes, and with a powder infinitely finer than what was before uſed in what was commonly called the grinding.

How to polish the Speculum.

IT is neceſſary to obſerve, that in order to avoid the detrimental intruſions of any particles of emery, it would not be right to poliſh in the ſame room where the metal and tools were ground, nor in the ſame clothes which were worn in the former proceſs; at leaſt, it would be neceſſary to keep the bench quite wet, to prevent any duſt from riſing.

Having then made the poliſher by coating the braſs convex too equally with pitch, which we ſuppoſe ſmoothed and finiſhed with the braſs tool in the manner before deſcribed, and which is a very eaſy proceſs; the whole operation is begun and finiſhed in the following manner:

The leaden weight or handle upon the back of the metal ſhould be divided into eight parts, by ſo many deep ſtrokes of a graver upon the upper ſurface of the lead, making each ſtroke with the numbers 1, 2, 3, 4, and ſo on, that the turns of the metal in the hand may be known to be uniform and regular.

To prevent any miſchief from coarſe particles of putty, I always waſh it immediately before uſing: in order to this, put about half an ounce of putty into an ounce phial, and fill it two thirds with water; then having ſhaken the whole, let the putty ſubſide, and ſtop the bottle with a cork.

In a tea-cup, with a little water, there ſhould be a full-ſized camel's-hair bruſh, and a piece of dry clean ſoap in a gally-pot: a ſoft piece of ſponge will alſo be neceſſary. Theſe, as well as the metal bruiſer and poliſher, ſhould be conſtantly covered from duſt.

The poliſher being fixed down, and the camel's-hair bruſh, being firſt wetted and rubbed a little over the ſoap, let every part of the tool be bruſhed over therewith; then work the bruiſer with ſhort, ſtraight, and round ſtrokes, lightly upon the tool, and continue to do ſo, now and then turning it, till the poliſher have a good face, and be fit for the metal. Then having ſhaken up the putty in the phial, and touched the poliſher in five or ſix places with the cork wetted with that and the water, place the bruiſer upon the tool, and give a few ſtrokes upon the putty to rub down any gritty particles; after which, having removed it, work the metal lightly upon the poliſher round and round, carrying the edges of the ſpeculum, however, not quite half an inch over the edge of the tool, and now and then with a croſs ſtroke.

The firſt putty, and indeed all the ſucceeding applications of it, ſhould be wrought with a conſiderable while; for if time be not given for the putty to bed itſelf in the pitch, and

any

any quantity of it lie looſe upon the poliſher, it will accumulate into knobs, which will injure the figure of the metal: and therefore as often as ſuch knobs ariſe, they muſt be carefully ſcraped off with the point of a penknife, and the looſe ſtuff taken away with a bruſh. After the putty is well wrought into the pitch, ſome more may be added in the ſame manner, but never much at a time, always remembering to work upon it firſt with the bruiſer, for fear any gritty particles may find their way upon the poliſher. If the bruiſer be apt to ſtick, and do not ſlide ſmoothly upon the pitch, the ſurface of either tool may be occaſionally bruſhed over with the ſoap and water, but it muſt be remembered, that the wet bruſh muſt be but ſlightly rubbed upon the ſoap.

In the beginning of this proceſs little effect is produced, and the metal does not ſeem to poliſh faſt, in ſome meaſure owing to its taking the poliſh in the middle, and perhaps becauſe neither that nor the bruiſer move evenly upon the poliſher: but a little perſeverance will bring the whole into a good temper of working; and when the pitch is well defended by the coating of the putty, the proceſs will advance apace, and the former acquiring poſſibly ſome little warmth, the metal moves more agreeably over it, with an uniform and regular friction. All this while the metal muſt have no more preſſure than that which it derives from its own weight, and that of the handle; and the poliſher muſt never be ſuffered to grow dry, but as often as it has a tendency to do ſo, the edges of it muſt be moiſtened with the hair pencil; and now and then, even when freſh putty is not laid on, the ſurface of the poliſher ſhould be touched with the bruſh to keep it moiſt.

When the poliſh of the metal nearly reaches the edge (for it always, as I ſaid before, begins in the middle) you muſt alter the method of working; for now the round ſtrokes muſt be gradually altered for the ſhort and ſtraight ones. Suppoſing then you are juſt beginning to alter them; after having put on freſh putty, and gently rubbed it with two or three ſtrokes of the bruiſer, you place the metal on the tool, and after a ſtroke or two round and round, give it a few forward and backward, and from ſide to ſide, but with the edges very little over the tool; then having turned the metal one eighth round in your hand, and having moved yourſelf as much round the block (which muſt be remembered throughout the whole proceſs) you go on again with a ſtroke or two round, to lead you only to the croſs ſtrokes, which are now to be principally uſed, and with more boldneſs. After this has been done ſome time, the metal will begin to move ſtiffly, as the friction now increaſes, and the ſpeculum poliſhes very beautifully and faſt; and the whole ſurface of the poliſhing tool will be equally covered over with a fine metallic bronze. The tool even now muſt not be ſuffered to become dry; a ſingle round ſtroke in each of your ſtations and turnings of the metal will be ſufficient, and the reſt muſt all be croſs ones, for we are completing a circular figure. You muſt now be very diligent, for the poliſher drying, and the friction increaſing very faſt, the buſineſs of the ſpherical figure is nearly at an end. As the metal wears much, its ſurface muſt be now and then cleaned with a piece of ſhammy leather, from the black ſtuff which collects upon it; and the poliſher likewiſe from the ſame matter, with a ſoft piece of wet ſponge. You will now be able to judge of the perfect ſpherical figure of the metal and tool, when there is a perfect correſpondence between the ſurfaces, by the fine equable feel there is in working

working, which is totally free from all jerks and inequalities. Having proceeded thus far, you may put the laſt finiſhing to this figure of the metal by bold croſs ſtrokes, only three or four in the directions of each of the eight diameters, turning the metal at the ſame time: this muſt be done quickly, for it ought, in this part of the proceſs particularly, to be remembered, that if you permit the tool to grow quite dry, you will never be able, with all your force, to ſeparate that and the metal, without deſtroying the poliſher by heat.

The metal has now a beautiful poliſh and a true ſpherical figure, but will by no means make a ſharp diſtinct image in the teleſcope: for the ſpeculum (if it be tried in the manner hereafter recommended) will not be found to make parallel rays converge without great aberration; indeed, the deviation will be ſo great, as to be very ſenſibly perceived by a great indiſtinctneſs in the image.

It is here neceſſary to remark, that there muſt be a hole through the middle of the poliſher, a little leſs than the hole in the metal, otherways the hole in the metal would collect the pitch towards the middle, and hence it would be impoſſible to make a good figure.

How to give the Parabolic Figure to the Metals.

In order then to give the ſpeculum the laſt and finiſhing figure, which is done by a few ſtrokes, it muſt be particularly remarked, that by working the metal round and round, the ſphere of the poliſher by this means growing leſs, it wears faſteſt in the middle: and as a ſegment of the ſphere may

become parabolic, by opening the extremes gradually from within outwards, ſo it may be equally well done by increaſing the curvature in the middle, in a certain ratio, from without inwards.

Suppoſing then the metal to be now truly ſpherical, ſtop the hole in the poliſher, by forcing a cork into it underneath, about an inch, ſo that it do not reach quite to the ſurface; and having waſhed off any mud that may be on the ſurface of the tool, with a wet ſoft piece of ſponge, whilſt the ſurface of it is a little moiſt, place the center of the metal upon the middle of the poliſher; then having, with the wet bruſh, lodged as much water round the edge of the metal as the projecting edge will hold, fill the hole of the metal and its handle with water, to prevent the evaporation of the moiſture, and the conſequent adheſion between the ſpeculum and poliſher, and let the whole reſt in this ſtate two or three hours: this will produce an intimate contact between the two; and by parting, with any degree of warmth they may have acquired by the vicinity of the operator, they will grow perfectly cold together.

By this time you may puſh the cork from the poliſher, to diſcharge the water, and give the metal the parabolic figure in the following manner:

Move the metal gently and ſlowly at firſt, a very little round the center of the poliſher (indeed after this reſt it will move ſtiffly) then increaſing by degrees the diameter of theſe ſtrokes, and turning the metal frequently round its axis, give it a larger circular motion, and this without any preſſure but its own weight, and holding it looſely between the

the fingers: this manner of working may ſafely be continued about two minutes, moving yourſelf as uſual round the block, and carrying the round ſtrokes in their increaſed and largeſt ſtate, not more than will move the edge of the metal half an inch or five-eighths over the tool. The ſpeculum muſt not all this while be taken off from the poliſher; and conſequently no freſh putty can be added. It will not be ſafe to continue this motion longer than the time abovementioned; for if the parabolic tendency be carried the leaſt too far, it will be impoſſible to recover a true figure of that kind, but by going through the whole proceſs for the ſpherical one in manner before deſcribed, by the croſs ſtrokes upon the poliſher, which takes a great deal of time. However, when there is occaſion, it may be done; and I have myſelf ſeveral times recovered the circular figure, when I had inadvertently gone too far with the parabolic, and ultimately finiſhed the metal on the poliſher without the uſe of the hones.

To try the true Figure of the Metal.

IT will now be proper to try the figure of the ſpeculum, and that is always beſt done by placing it in the teleſcope it is intended for. In order to this, I uſe the inſtrument as a kind of microſcope, placing the object, however, at ſuch a diſtance that the rays may be nearly parallel. At about twenty yards a watch paper, or ſome ſuch object, on which there are ſome very fine ſtrokes of a graver, is fixed up. The lead muſt be then taken off from the back of the ſpeculum, which is beſt done by placing the edge of a knife at the junction of the lead and metal, when,

by

by ſtriking the back of it with a ſlight blow, the pitch immediately ſeparates, and the handle drops off; the remaining pitch may be ſcraped off with a knife, taking care that none of the duſt ſtick to the poliſhed face of the metal.

Having placed the ſpeculum in the cell of the tube, and directed the inſtrument to the object, make an annular kind of diagram with card paper, ſo as to cover a circular portion of the middle part of the metal between the hole and the circumference, equal in breadth to about an eighth part of the diameter of the ſpeculum: this paper ring ſhould be fixed in the mouth of the teleſcope, and remain ſo during the whole experiment, for the part of the metal covered by it, is ſuppoſed to be perfect, and therefore unemployed.

There muſt likewiſe be two other circular pieces of card paper cut out, of ſuch ſizes, that one may cover the center of the metal by completely filling the hole in the laſt deſcribed annular piece; and the other, ſuch a round piece as ſhall exactly fill into the tube, and ſo broad, as that the inner edge juſt touch the outward circumference of the middle annular piece. It would be convenient to have theſe two pieces ſo fixed to an axis, that they may be put in their places, or removed from thence ſo eaſily, as not to diſplace or ſhake the inſtrument. All theſe pieces therefore, together, will completely ſhut up the mouth of the teleſcope.

Let the round piece which covers the center of the metal, or that which has no hole in it, be removed; and, by a nice adjuſtment of the ſcrew, let the image (which is now formed by the center of the mirror) be as ſharp and diſtinct as poſſible. This being done, every thing elſe remaining

maining at reſt, replace the central piece, and remove the outſide annular one, by which means the circumference only of the ſpeculum will be expoſed, and the image now formed will be from the rays reflected from the outſide of the metal. If there be no occaſion to move the ſcrew and little metal, and the two images formed by theſe two portions of the metal be perfectly ſharp, and equally diſtinct, the ſpeculum is perfect, and of the true parabolic curve; or at leaſt the errors of the great and little ſpeculum, if there be any, are corrected by each other.

If, on the contrary, under the laſt circumſtance, the image from the outſide of the metal ſhould not be diſtinct, and it ſhould become neceſſary, in order to make it ſo, that the little ſpeculum be brought nearer, it is plain that the metal is not yet brought to the parabolic figure; but if, on the other hand, in order to procure diſtinctneſs, you be obliged to move the little ſpeculum farther off, then the figure of the great ſpeculum has been carried beyond the parabolic, and hath aſſumed an hyperbolic form. When the latter is the caſe, the circular figure of the metal muſt be recovered (after having fixed on the handle with the ſoft pitch) by bold ſoft ſtrokes upon the poliſher; indeed, a very few of them in the manner before deſcribed make in effect a greater difference in the ſpeculum than would be at firſt imagined. If a metal of a true ſpherical figure were to be tried in the above-mentioned manner in the teleſcope, which I have frequently done, the difference of the foci of the two ſegments of the metal would be ſo conſiderable, as to require two or three turns of the ſcrew to adjuſt them; ſo very great is the abberration of a ſpherical figure of the ſpeculum, and ſo improper to procure that

ſharpneſs

ſharpneſs and preciſion ſo neceſſary to a good reflecting teleſcope.

This is by no means the caſe of the object glaſſes of the refractors; for beſides that they are in fact never ſo diſtinct as well finiſhed reflectors, the apertures of them are ſo exceedingly ſmall, compared to the latter, and the number of the degrees employed ſo very ſmall, that the inconvenience of a ſpherical figure is not ſo much perceived. Accordingly, we obſerve in the generality of reflectors whoſe ſpecula, unleſs by accident, are always ſpherical,, that the only true rays which form the diſtinct image ariſe from the middle of the metal: and unleſs the defect be remedied by a conſiderable aperture, which deſtroys much light, the falſe reflection from the inſide of the metal produces a greyiſh kind of hazineſs, which is never ſeen in Mr. Short's, or indeed in any good teleſcopes.

Suppoſing that the two foci of the different parts of the metal perfectly coincide, and that, by the union of them when the apertures are removed, the teleſcope ſhews the objects very ſharp and diſtinct, you are not however even then to conclude that the inſtrument is not capable of farther improvement; for you will perceive a ſenſible difference in the ſharpneſs of the image, under different poſitions of the great ſpeculum with reſpect to the little one, by turning round the great metal in its cell, and oppoſing different parts of it to different parts of the little metal, correcting by this means the error of one by the other. This attempt ſhould be perſevered in for ſome time, turning round the great ſpeculum at about one ſixteenth at a time, and carefully obſervi- g the moſt diſtinct ſituation each time the eye piece is _ ewed on: when by trying and turning the

the great metal all round, the diſtincteſt poſition is diſcovered, the upper part of the metal ſhould be marked with a black ſtroke, in order that it may always be lodged in the cell in the ſame poſition. This is the method Mr. Short always uſed; and the caution is of ſo much conſequence, that he thought it neceſſary to mention it very particularly in his printed directions for the uſe of the inſtrument.

And farther, Mr. Short frequently corrected the errors of the great by the little metal in another way. If the great ſpeculum did not anſwer quite well in the teleſcope, he cured that defect ſometimes by trying the effect of ſeveral metals ſucceſſively, by this means correcting the errors of one by the other; for in ſeveral of his teleſcopes which have paſſed through my hands, when the ſizes and powers have been the ſame, I have found that the great metals, though very diſtinct in their proper teleſcopes, yet have, when taken out and changed from one to the other, ſpoiled both teleſcopes, rendering them exceedingly indiſtinct; which could ariſe from no other circumſtance.

To return. A little uſe in working will make the whole of the proceſs of grinding and poliſhing very eaſy and certain; for though I have endeavoured to be as particular as I can (I am almoſt afraid too much ſo) it is yet ſcarcely poſſible to ſupply a want of dexterity ariſing from habit only, by the moſt laboured and minute deſcription. And though the above account may appear irkſome to the reader, as it lies cold before the eye, I am very ſure, whoever attempts to make the inſtrument, will not complain of it as tediouſly particular.

I will, however, farther remark, that when the metal begins to move ſtiffly upon the poliſher, and particularly when the figure is almoſt brought to the parabolic form, it will be neceſſary to fix the elbows againſt the ſides, in order to give momentum and equability to the motion of the hand by that of the whole body.

The ſame poliſher will ſerve for ſeveral metals, if it be ſomewhat warmed when you begin to uſe it.

There is another circumſtance, and a material one too, which muſt not be omitted; it is this: For the very ſame reaſon that the pitch ſhould not be too hard or ſoft, the work will not proceed well in the heat of ſummer, or cold of winter: in the latter, it may be poſſible to remedy the defect by having the room warmed with a ſtove; and in the ſummer, the other inconvenience may perhaps be avoided by uſing a harder kind of pitch; but I much doubt in either caſe whether the work will go on ſo kindly. I have myſelf always wrought in ſpring and autumn.

The proceſs of poliſhing, and indeed grinding upon the hones, will not go on ſo well if it be not continued uninterruptedly from beginning to end; for if the work of either kind be left but for a quarter of an hour, and you then return to it again, it will be ſome time before the tool and metal can get into a kindly way of working; and till they do, you are hurting what was done before.

I cannot conclude without indulging myſelf in an obſervation on the amazing ſagacity of Sir Iſaac Newton in every ſubject upon which he thought fit to employ his attention.

tention. It was he who firſt propoſed, and indeed practiſed poliſhing with pitch: a ſubſtance which at firſt ſight perhaps every one but himſelf would have thought very improper, from its ſoftneſs, to produce that correctneſs of figure ſo neceſſary upon theſe occaſions: yet, he poliſhed ſeveral object-glaſſes for refracting teleſcopes, and mended many more with it; and I do believe that it is the only ſubſtance in nature that is perfectly well calculated for the purpoſe; for, at the ſame time that it is ſoft enough to ſuffer the putty to lodge very freely on its ſurface, and for that reaſon to give a moſt tender and delicate poliſh, it is likewiſe totally inelaſtic, and therefore, never from that principle, ſuffers any alteration in the figure you give it. If the firſt makers of the inſtrument, therefore, had given proper credit to, or had ſimply followed the hint Sir Iſaac gave, itwould have ſaved them infinite trouble, and they would have produced much better inſtruments; but the pretended refinement of drawing a tincture from pitch with ſpirits of wine, affords you only the reſinous, hard, and untractable part of the pitch, diveſted of all that part of its original ſubſtance which is neceſſary to give it that accommodating pliability in which its excellence conſiſts.

It is needleſs to ſwell this account with a detail of the proceſs for poliſhing the little ſpeculum, as it muſt be conducted in the ſame manner which has been already deſcribed in that of the large one; only obſerving, that as the little metal has an uninterrupted face, without a hole, ſo there is no occaſion for one in the poliſher; and likewiſe that, as a ſpherical figure is all that need here be practically attempted, ſo the difficulty in finiſhing is infinitely ſhort of that of the other.

As it is always neceſſary to ſolder to the back of the little ſpeculum a piece of braſs, as a fixture for the ſcrew to adjuſt its axis, I ſhall juſt hint a ſafe and neat method of doing it, which may be very uſeful to the optical or mathematical inſtrument-maker upon other occaſions. Having cleaned the parts to be ſoldered very well, cut out a piece of tinfoil the exact ſize of them; then dip a feather into a pretty ſtrong ſolution of a ſal ammonic in water, and rub it over the ſurfaces to be ſoldered; after which, place the tinfoil between them as faſt as you can (for the air will quickly corrode their ſurfaces, ſo as to prevent the ſolder taking) and give the whole a gradual and ſufficient heat to melt the tin. If the joints to be ſoldered have been made very flat, they will not be thicker than a hair: though the ſurfaces be ever ſo extenſive, the ſoldering may be conducted in the ſame manner, only that care muſt be taken, by gentle preſſure, to keep them cloſe together. In this manner, for inſtance, a ſilver graduated plate may be ſoldered on the braſs limb of a quadrant, ſo as not to be diſcernible by any thing but the different colours of the metals.

A Deſcription of the Grinding Tools, and the Apparatus for aſcertaining the true Figure of the Speculum.

THE grinder for working off the face of the metal. The black ſtrokes repreſent deep grooves made with a graver. Fig. 3.

The bed of hones, which is to complete the ſpherical figure of the ſpeculum, and to render its ſurface fit for the poliſher. Fig. 4.

An

An apparatus for examining the parabolic figure of the ſpeculum. Fig. 5.

A A, the mouth of the teleſcope, or edge of the great tube.

B B, a thin piece of wood, faſtened into, and fluſh with the end of the tube; to which is permanently fixed the annular piece of paſteboard C C, intended to cover, and to prevent the action of the correſponding part of the ſpeculum.

D, another piece of paſteboard, fixed by a pin to the piece of wood B B, on which it turns on a center; ſo that the great annular opening H H, may be ſhut up by the ring E F, or the aperture G G, by the imperforate F, in ſuch manner, that, in the firſt inſtance, the reflection may be from the center, and, in the latter, from the circumference of the great ſpeculum.

To grind and poliſh Concave Lenſes for Proſpect-Glaſſes, &c.

PLACE an arbor or mandrill in a turner's lathe, whereon you can fix leaden wheels of what dimenſion you pleaſe; ſuppoſe one, two, or three inches diameter, and three-eighths, or half an inch thick (which are common ſizes for making the above mentioned inſtruments) you then prepare the glaſs by chipping it round with a pair of large ſciſſars, or ſmall ſhears, to the ſize you want it, and either cement it to the end of a little ſhort block of wood made for that purpoſe, or hold it looſe in your fingers upon the edge of the wheel, it having emery and water conſtantly

conſtantly applied to it all the while you are grinding. In holding the glaſs, you muſt preſs moderately upon it, and keep turning it backward and forward all the time, ſo that it may have a true figure. When you have ground it deep enough, and you can obſerve no defect in its ſpherical figure, you muſt apply no more emery, but ſtill keep working it upon the tool with a very light hand. It would ſtill be much better if you had another wheel of the ſame diameter, on which you might apply a little ground pumice-ſtone, in order to take out the ſtrokes or ſcratches made by the emery. When you perceive it to be in a proper ſtate for poliſhing, which you may do by examining it through a magnifying glaſs, and if no ſcratches nor holes appear, it is then ready for the poliſhing wheel, which is made of wood, the exact ſize of the wheel, on which it was ground, and a piece of clean linen cloth faſtened double round its edge; then apply putty moiſtened with water, and work it in the ſame manner as when you ground it; and, in a few minutes, you will perceive it to have an excellent poliſh.

To grind Convex Lenſes for Microſcopic Object-Glaſſes, Eye-Glaſſes, &c.

Firſt, provide an upright ſpindle, at the bottom of which a pully is fixed, which muſt be turned by a wheel, by means of a cord and handle. At the top of the ſpindle make a ſcrew, the ſame as a lathe ſpindle, whereon you may ſcrew chocks of different ſorts; which may be made in the following manner:

Make

Make a hole in a piece of wood, juſt to fit tight upon the collar of the ſpindle, and turn it to one inch long, and one inch larger in diameter than the hole; place it on the collar at the chock end of the ſcrew, and lap a piece of paſteboard round the wood, ſo that it may ſtand an inch above the top of the ſcrew; then pour melted lead upon it till the paper is full, and when cold, you may unſcrew it, and fix it in a lathe; ſcrew the chock on again, and turn it true on the end; take it off, and ſolder a piece of thick braſs upon it, with ſoft ſolder; afterwards turn the braſs to the concavity you intend it, as true as poſſible, with the turning tool, after which apply it upon the edge of a wheel of the ſame radius of a ſphere as the gage you turned it by; and by grinding it a little in the ſame manner as you grind concave glaſſes, it will be ready for uſe. Next prepare the glaſs, by chipping it to the ſize you want it, and cement it on the end of a block of wood of the ſame diameter, and one, two, or three inches long, ſo as to hold it eaſily between your two fingers and thumb; make a concave gage of thin braſs, the ſame radius of a ſphere as the pan, and grind the edges of the glaſs upon a rough grinding-ſtone till it fits the gage; then it is ready for its ſpherical figure.

The next thing neceſſary is to prepare the emery, which is done in the following manner: provide at leaſt ſix earthen veſſels, that will hold two or three quarts each (take care they are quite clean when uſed); fill the firſt with water, and put one pound of fine emery in it, and ſtir it well about with a ſtick; after which, let it ſtand about three ſeconds of time, and then pour it into another veſſel, which let ſtand ten ſeconds, then pour it off again into the ſeveral veſſels until the water is quite clear; and, by this means,

means, you will obtain emery of as many degrees of fineneſs as you pleaſe; which muſt be kept ſeparate from one another, and worked in their proper order, beginning at the firſt, and working off all the marks of the grinding-ſtone; then take off the ſecond and third, &c. holding the glaſs upon the pan with a light hand when it comes to be nearly fit for poliſhing. A little experience will make the practitioner quite perfect.

The poliſhing is performed as follows: after the glaſs is brought, by grinding with emery, to a fine ſurface, grind ſome pumice-ſtone, by rubbing it with a little water upon a ſtone, and what rubs off muſt be uſed in the pan (this is called bottoming); work it off with this till it is almoſt poliſhed, which will eaſily be perceived; then tie a piece of linen rag about the pan, and, with putty moiſtened with water, continue the grinding motion, and in a little time there will be an excellent poliſh.

What has been ſaid on grinding ſpeculums for reflectors, will be as eaſily adapted to the grinding of object glaſſes for refractors; for what is called the bruiſer there, will in this caſe be called a pan; and the convex tool will become the bruiſer.

There have been contrived a number of different compoſitions for the metals of reflecting teleſcopes; among which, the following appear to be very good:

1. Take of clean new copper twenty-four ounces; melt it in a crucible, ſkim off the *ſcoria*; let the fire abate a little, and add ten ounces of the pureſt grain tin rolled up in brown paper: when the tin is melted, ſtir it with a wooden

wooden ſpatula; and having your moulds ready, pour the metal into them.

The regulation of the fire in making the above metals, ſhould be particularly attended to; for if a violent fire be uſed after the tin is added, the tin will evaporate, and the metal will be full of air-holes, which will prevent its acquiring a fine poliſh. Therefore, when the copper is in perfect fuſion and the ſcoria taken off, the fire ſhould be diminiſhed, the tin added, and no more heat ſhould afterwards be uſed than is ſufficient to melt the whole, ſo as to give the metal its proper form when poured off into the mould.

The Rev. Mr. *Edwards* has taken a great deal of pains to diſcover the beſt compoſition for the metals of reflecting teleſcopes, alſo to give them a fine poliſh and the true parabolic figure.

Theſe teleſcopes have been tried by Dr. *Maſkeline*, and found greatly to excel in brightneſs, and to equal, in other reſpects, thoſe made by the beſt artiſts. They ſhew a white object perfectly white, and all objects of their proper colour; much different from the common reflecting teleſcopes.

After having combined the following metals and ſemi-metals, ſuch as ſilver, platina, iron, copper, braſs, lead, tin, antimony, biſmuth, zinc, arſenic, &c. he found, that 32 ounces of copper, with 15 or 16 ounces of grain tin (according to the purity of the copper) with the addition of one ounce of braſs, one of ſilver, and

one ounce of arſenic, will form a metal capable, when poliſhed in a proper manner, of reflecting more light than any other metal yet made public.

When it is ſaid that the proportion of tin is from 15 or 16 to 32 ounces of copper, it ſhould be underſtood that the proportion of tin will not always be accurately the ſame, as copper will take more or leſs tin to perfectly ſaturate it, according to its purity; it might be of uſe previouſly to purify the copper as much as poſſible; but a very little experience in theſe matters will enable any one exactly to know when the copper is completely ſaturated; as the compoſition will, if broken, appear of a moſt beautiful bright, and glaſſy nature, very much reſembling the fine face of quickſilver. The method to aſcertain that point exactly, is to melt 32 ounces of copper, and to add to it, when ſufficiently fuſed, 15 ounces of tin, and to pour the mixture into an ingot; then to a certain known portion of this compoſition add a very ſmall, but known portion of tin; and thus by a few trials one may eaſily obtain the point of complete ſaturation, and the maximum of perfection; having then aſcertained what portion of tin is added to the above known quantity of the compoſition, add the proportional quantity of tin to the whole, when melted a ſecond time. Thus, if I find I muſt add 1 quarter of an ounce to 1 pound of the compoſition, ſo as to obtain the utmoſt brilliancy,—then I know, that when I ſhall melt the remainder of the metal a ſecond time, in order to caſt the ſpeculum, I muſt add 1 ounce of grain tin to 4 pounds of the compoſition made according to the proportion of 32 ounces of copper to 15 ounces of tin.

The

The beſt method poſſible to make this compoſition to the greateſt advantage, is to melt the copper as fluid as poſſible, and flux it with the *black flux*, which is made by mixing 2 parts of *tartar* with one of *nitre*; to melt the tin in a ſeparate crucible by itſelf; to take the two crucibles out of the fire, and pour the melted tin into the fluid copper, and ſtir it inſtantly with a wooden ſpatula, and pour the whole immediately into a large quantity of cold water. The ſudden chill from the cold water divides the melted maſs into an infinite number of ſmall particles, and by that means cools it inſtantaneouſly, and conſequently prevents the tin from calcining ſenſibly; and hence it was always found, that in the ſecond melting the compoſition was entirely free from pores, even though no arſenic had been employed: yet the addition of arſenic ever rendered it much more compact, and indeed ſpecifically heavier, as well as more brilliant and beautiful; for the ſpecific gravity of the compoſition itſelf is 8.78; but with the addition of 1 ounce of arſenic to 1 pound of metal, it is 8.89.

After having made the brilliant compoſition of copper and tin, melt the proportionable quantity of ſilver and braſs in a ſmall crucible by itſelf. When you put the compoſition a ſecond time into the crucible, add alſo the lump of braſs and ſilver melted before in a ſeparate crucible, and when the whole is fluid, add the proportionable quantity of arſenic, and then pour it off into the flaſks after the *ſcoria* is taken off, and a little powdered roſin is thrown into it. In other words, it is better not to add the braſs to the copper in the firſt melting, as the heat of the copper calcines the *Lapis Calaminaris* in the braſs, which renders the metal not ſo good as if the braſs and ſilver were melted together (as ſilver melts with a leſs heat than braſs) and then added to the metal

in the ſecond melting. As copper requires a much greater heat to melt it than braſs, it gives too great a heat to the braſs when it is added to it, which by calcining the *lapis calaminaris* in the braſs, will ſometimes cauſe the metal to be in a ſmall degree porous. By purſuing the above method it will never be porous in the leaſt degree. We are not to imagine it porous becauſe it breaks up with the emery: it will always do ſo with the fineſt emery; but theſe break-ups are taken out by the bed of hones. If the common blue hones are uſed, a little water muſt be applied at a time, to make them cut the metal.—Having ſaid ſo much relative to the compoſition of the metal, which is indeed a capital article, we will paſs on to

The Manner of caſting this Metal.

THE ſand moſt proper for the purpoſe of caſting ſpeculums, is the common Highgate ſand generally uſed by the *London* founders: it ſhould be as little wet as may be, and well beaten, but not too hard. The flaſks ſhould be at leaſt 2 inches wider than the metal intended to be caſt; for if the ſand is not of a ſufficient thickneſs, it will inſtantly become dry when the hot fluid metal is poured into it, and conſequently will contract, and of courſe the fluid metal will run out of the flaſks. A proper thickneſs of ſand will however prevent this accident. The metal or pattern muſt be made of braſs or hard pewter, and muſt be a little thicker than the ſpeculum intended to be caſt from it, as the thing caſt is always a little leſs than the pattern, owing to its contracting a ſmall degree in cooling. A wooden pattern will not quit the ſand near ſo well as one made of metal; beſides, wood will always warp by the moiſture of the

ſand,

ſand, and conſequently will give a falſe figure or form to the intended ſpeculum, and ſo create more labour.

As the compoſition here given for the ſpeculum is the hardeſt, and the moſt brittle of any metal yet known, ſo it is the moſt difficult to caſt: the common manner of caſting other ſpecula will not avail in the leaſt degree *here*; and it was a conſiderable time before a certain and infallible way to caſt them free from faults or flaws in the face downwards, was found out.

The *ingate* ſhould be at the back of the metal, and at the very edge of it; its breadth, where it joins the metal, ſhould be at leaſt half the diameter of the metal; and its thickneſs muſt be half the thickneſs of the metal at the edge; and the upper part of the git ſhould contain as much metal at leaſt, or even more, than the ſpeculum itſelf.

When the pattern with its ingate is taken out of the ſand, ten or a dozen ſmall holes ſhould be made through the ſand at the back of the mould, with a ſmall wire or common knitting-needle, to permit the air to eſcape as the metal is poured into the mould. It is found by experience that ſeveral ſmall holes are infinitely better for that purpoſe than one large hole.

When the metal is melted a ſecond time, which muſt be done with as ſmall a degree of heat as poſſible, and the proportionable quantity of crude arſenic in coarſe powder is added, ſtir it with a wooden ſpatula: when the fumes are gone off, take the metal off the fire, take away the droſs, and add half an ounce or an ounce of powdered roſin, or equal parts of powdered roſin and nitre, in order to give the metal a good face; ſtir it well with

with a ſtick, and pour it immediately into the flaſks. When the git is filled up with the fluid metal, ſtrike the flaſks gently, ſo as to ſhake or jog the metal in them in a ſmall degree; this will prevent any flaws in the face, from any air bubbles being lodged there. When the metal has remained in the flaſks for a few minutes, ſo as to become entirely ſolid, open the flaſks when the metal is red hot (it cannot crack in this ſtate, though it is expoſed to the air, as all metals are malleable when they are red hot) and take out the ſpeculum with a pair of tongs, laying hold of it by the git, but take care to keep the face downwards to prevent it from ſinking; force out the ſand from the hole in the middle of the mirror with a piece of wood or iron, and place the ſpeculum in an iron pot with a large quantity of hot aſhes, or ſmall coals, ſo as to bury the ſpeculum in them a ſufficient depth; if the ſand is not forced out of the hole in the manner above directed, the metal by ſinking as it cools will embrace the ſand in the middle of the ſpeculum ſo tight, as to cauſe it to crack before it becomes entirely cold; and if the metal is not taken out of the ſand, and put in a pot with hot aſhes to anneal it, the moiſture from the ſand will always break the metal. Let the ſpeculum remain in the aſhes till the whole is become entirely cold. The git may eaſily be taken off, by marking it round with a common fire half-round file; and giving it then a gentle blow, the metal is then to be ground and figured.

Of rough-grinding and figuring the Speculum.

THE beſt method found to rough-grind the ſpeculum, is to grind the ſurface of it quite bright upon the common grindſtone, made nearly to the figure or focus of the

the ſpeculum by a gauge. Take it then to a convex tool made of lead and tin, or elſe of pewter, and grind the metal upon it with fine emery; which, however fine it may be, will break up the metal very much. This tool, or rough-grinder, ſhould be of an elliptical form, and not circular, and of ſuch dimenſions that the ſhorteſt diameter of the ellipſe ſhould be equal in breadth to the diameter of the mirror; and the longeſt diameter of the elliptical tool ſhould be to the ſhorteſt diameter in the proportion of 10 to 9 accurately.

When the metal is brought to a true figure, it muſt be brought to a convex tool formed with ſome ſtones from a place called *Edgdon*, in *Shropſhire*, ſituate between *Ludlow* and *Biſhops-Caſtle*; theſe ſtones or hones are of a fine grain, and will eaſily cut the metal, and bring it to a fine face. The bed of hones ſhould be of a circular figure, and but very little larger than the metal intended to be figured upon it, viz. about two-tenths of an inch, but not more for a ſpeculum of 4 or 5 inches diameter. If the tool is made conſiderably larger than the metal, it will grind the metal perpetually into a larger ſphere, and by no means of a good figure; if the metal and tool are of the ſame ſize exactly, the metal will work truly ſpherical; but it is apt to ſhorten the focus leſs and leſs, unleſs the metal and tool are worked alternately upwards: it had better be made a little (about one-twentieth part) greater in diameter larger than the mirror; when it will not ſo much alter its focus. Too much water ſhould not be uſed at a time upon the hone pavement, or the figure will be very bad; which may eaſily be ſeen by the face of the metal appearing of different degrees of brightneſs in different parts of it. When the metal is brought to a

very

very fine face and figure by the bed of hones, it is then ready to receive a poliſh; but before we give directions concerning the manner of poliſhing it, a circumſtance or two, inadvertently paſſed over, muſt be mentioned. The metal muſt not be caſt too thick, or it will never take the parabolical figure intended to be given to it: the beſt proportion found for this purpoſe is a metal of 4 ½ inches diameter, and 18 inches focus; it ſhould be 4-tenths of an inch thick at the edge of it: the back of the mirror ſhould be convex to ſtrengthen it; and to cauſe it to ſpring and adhere to the poliſher uniformly, its convexity ſhould be equal to its concavity on the face, that the metals may be everywhere of an equal thickneſs. The handle ſhould be made of lead, of the ſame convexity and concavity as the metal; its thickneſs about double that of the metal; and its diameter 3-fourths of that of the ſpeculum; it ſhould have a hole in the middle, with a copper or iron ſcrew on it, ſo as to put it together with the mirror, to which it is faſtened with pitch, on a collar lathe, in order to ſmooth and finiſh the edge of the metal, which may be done by holding a fine file to it, when in the lathe at firſt, and afterwards one of the above-mentioned ſtones.

Of poliſhing the Metal, and giving it the true parabolic Figure.

THE rough grinder of an elliptical form is now to be covered with common pitch. The pitch for this purpoſe is generally made by boiling tar in a ladle, over a ſlow fire, till it becomes of the conſiſtence required; for there is a great nicety in the degree of hardneſs of the pitch. The harder

harder the pitch is, the better figure it will give to the metal, as it does not alter its figure in working, as ſoft pitch does; beſides, the metal will acquire a luſtre upon a poliſher moderately hard, ſo as to ſhew objects reflected from it as vivid and near their natural colour as poſſible; but if the pitch is too ſoft, ſome of its fineſt particles will always adhere to the face of the metal, and form a very fine and thin cuticle or covering upon its ſurface. This circumſtance is rendered very evident by viewing any white object in the metal, when that fine cuticle or covering upon the ſurface of the ſpeculum will cauſe it to ſhew the object of a dingy brown colour, and not of itsg enuine whiteneſs.

Pitch may be eaſily made harder by adding to it a proper quantity of roſin. I often uſe equal quantities of pitch and roſin, ſo as to make the mixture juſt ſo hard when cold as to receive an impreſſion from a moderate preſſure of my nail. A poliſher made with pitch and roſin has this advantage, viz. though it is hard, yet it is not ſo brittle as when pitch only is uſed, and made hard by boiling it; and conſequently not ſo liable to break or chip off at the edges, and thereby ſcratch the metal. Pour the melted pitch and roſin when pretty cool, upon the elliptical tool, made previouſly warm, ſo as to cover it everywhere when ſpread upon it with an iron ſpatula, about the thickneſs of a half-crown piece. If the covering is too thin, it will continually alter its figure, by the heat it acquires in working the metal upon it, and thereby give a bad figure alſo to the ſpeculum; when it is ſomewhat cool lay a piece of writing paper upon the ſurface of the pitch, and gently preſs the mirrour upon the paper; inſtantly pull the paper off from the pitch, after you have preſſed the mirrour upon it, elſe it might adhere

to the pitch, and you will find the poliſher will be neatly figured to the form of the ſpeculum. If it has not taken an exact figure everywhere, which would appear by the fine marks of the paper upon the pitch, gently warm the ſurface of the pitch, and repeat the operation as before, till you have formed it of the exact figure of the metal.

With a penknife now take away all the ſuperfluous pitch from the edge of the poliſher; and with a convenient piece of wood form the hole in the middle accurately round. In other words, let the pitchy ſurface be everywhere of the exact ſize and ſhape as the lead tool which is under it.

It may be neceſſary to mention that the hole in the middle of the poliſher ſhould go quite through the tool, and ſhould be made of the ſame ſize, or ſomewhat leſs than the hole in the middle of the ſpeculum. This is a neceſſary caution; and indeed it has always been found that ſmall mirrours without any hole in the middle wil poliſh much better, and the figure will be more correct, if the poliſher has a hole in the middle of it. The powder to which the preference is given, to give a moſt exquiſite luſtre, is colcothar of vitriol, and not putty. Putty gives metals a white luſtre, or, as the workmen call it, *a ſilver hue*; but good colcothar of vitriol will poliſh with a very fine and high black luſtre, ſo as to give the metal poliſhed with it the complexion of poliſhed ſteel. To know if the colcothar is good, put ſome of it in your mouth, and if you find it diſſolved away, it is good; but if you find it hard, and cranch between your teeth, it is bad; good colcothar of vitriol is of a deep red or deep purple colour, and is ſoft and oily when rubbed between the

the fingers: bad colcothar is of a light red colour, and feels harſh and gritty. The colcothar of vitriol ſhould be levigated between two ſurfaces of poliſhed ſteel, and wrought with a little water; when it is worked dry, you may add a little more water to carry it down to what degree you pleaſe. When the colcothar has been wrought dry 3 or 4 times, it will acquire a black colour; and will be low enough, or ſufficiently fine, to give an exquiſite luſtre: this levigated colcothar of vitriol put in a ſmall phial, and pour ſome water upon it, and afterwards uſe it for poliſhing the metals in the ſame manner that waſhed putty is directed to be made uſe of for that purpoſe in the former part of this Treatiſe. Put on a large quantity of waſhed colcothar of vitriol at once, ſo as to ſaturate the pitch, and form a fine coating of the colcothar, and you will very rarely need to make uſe of a ſecond application. If a ſecond or third application of colcothar ſhould be found neceſſary to bring the metal to a fine luſtre or to take out any ſcratches upon its face, uſe it very ſparingly, or you will deſtroy the poliſh already attained. When the metal is nearly poliſhed, it will always generate ſome black mud upon the ſurface of the mirror, and alſo upon the tool. Wipe it now away from the face of the metal with ſome very ſoft waſh leather; though if too much of the mud be taken away, it will not poliſh ſo well. Indeed a little experience in theſe matters will better ſuffice than a volume written upon the ſubject.

In regard to the parabolic figure to be given to the metal, no particular caution is required in the poliſhing; the elliptic tool will always cauſe the ſpeculum to work into an accurate parabolic figure, ſuppoſing the tranſverſe and conjugate diameters bear the true proportion

to each other, and the metal is not too thick to prevent it always from adhering firmly and uniformly to the poliſher. Should the pitch prove too ſoft, it will give way, and alter the figure a little. This circumſtance will render the figure of the mirror ſometimes a ſmall degree ſhort of the parabola, and ſometimes a very little beyond it; but by a little perſeverance the correct figure is eaſily acquired.

To convince any one of the certainty of my aſſertion, let him poliſh a metal 2 ½ inches diameter, and 9 ½ inches focus upon an elliptical tool whoſe diameters are 2½ and 3 inches, and I can aſſert he will always find the metal when poliſhed (if it is not too thick) beyond the parabola, or it will prove hyperbolical. If he poliſhes it upon a circular tool in the common way with croſs ſtrokes in every direction poſſible, uſing firſt a few round ſtrokes, every time he changes his poſition he will find it always prove ſpherical, and conſequently ſhort of the parabola. A very little experience in theſe matters will convince any one of the eaſe and certainty of giving the great ſpeculum a parabolic figure by poliſhing it in a common manner with croſs ſtrokes in every direction poſſible, upon an elliptical tool of the proper dimenſions, in which (for common foci and apertures, viz. 2½ to 9½ focus, or 3.8 inches diameter to 18 inches focus) the diameters ſhould be 10 to 9. The ſhorteſt diameter of the ellipſe being exactly the ſame as the diameter of the metal, and the longeſt diameter of the ellipſe to the ſhorteſt diameter, as 10 to 9.

Magneti∫m

Magnetiſm.

Though the phenomena of the magnet have, for many ages, engaged the attention of natural philoſophers, not only by their ſingularity and importance, but alſo by the obſcurity in which they are involved; yet very few additions have been made to the diſcoveries of the firſt enquirers upon the ſubject. The powers of genius which have been itherto employed in proſecuting this ſubject, have not been able to frame an hypotheſis that will account in an eaſy and ſatisfactory manner for all the various properties of the magnet, or point out the links of the chain which connect it with the other phænomena of the univerſe, though it is certain that both natural and artificial electricity will give polarity to needles, and even reverſe; from whence it would appear that there is a conſiderable affinity between the electric and magnetic fluid; but how it acts when producting magnetiſm, is entirely unknown.

It is known by the works of *Plato* and *Ariſtotle*, that the ancients were acquainted with the attractive and repulſive powers of the magnet; but it does not appear that they knew of its pointing to the pole, or the uſe of the compaſs. As they were not acquainted with the true method of philoſophiſing, and contented themſelves with obſervation alone, their knowledge of nature was confined within very narrow limits, and did not afford any conſiderable advantage to ſociety. Modern philoſophers, by combining experiment with obſervation, ſoon extended the boundaries of ſcience, and diſcovered the polarity of

of the loadſtone; a property which in a manner conſtitutes the baſis of navigation, and gives being to commerce.

The loadſtone, leading ſtone, or natural magnet, is an iron ore, of all forms and ſizes, and of various colours. It is endowed with the property of attracting iron; and of both pointing itſelf, and alſo enabling a needle, touched upon it, and duly poiſed, to point towards the poles of the world.

Two Methods of communicating the Powers or Properties of the Magnet to Iron and Steel.

TO give a detail of the various proceſſes which have been ſuggeſted, for the touching or communicating the properties of the magnet to iron or ſteel, would alone fill a volume; I ſhall therefore only give an account of two general and good methods, which I preſume will be found adequate to every common purpoſe.

1. Place two magnetic bars A B (Plate IV. Fig. 6.) in a line with the north, or marked end of one, oppoſed to the ſouth, or unmarked end of the other, but at ſuch a diſtance from each other, that the magnet to be touched may reſt with its marked end on the unmarked end of A, and its unmarked end on the marked end of B; then apply the north end of the magnet D, and the ſouth end of E to the middle of the bar C, the oppoſite ends being elevated as in the figure; draw D and E aſunder along the bar C, one towards A, the other towards B, preſerving the ſame elevation; remove D and C a foot or two from the bar when they are off the ends, then bring the north and ſouth poles of theſe magnets together, and apply

apply them again to the middle of the bar C as before; repeat the ſame proceſs five or ſix times, then turn the bar, and touch the oppoſite ſurface in the ſame manner, and afterwards the two remaining ſurfaces; and by this means the bar will acquire a ſtrong fixed magnetiſm.

2. Place the two bars which are to be touched parallel to each other, and then unite the ends by two pieces of ſoft iron called ſupporters, in order to preſerve, during the operation, the circulation of the magnetic matter; the bars are to be placed ſo that the marked end D (Fig. 7.) may be oppoſite the unmarked end B; then place the two attracting poles G and I on the middle of one of the bars to be touched, raiſing the ends ſo that the bars may form an obtuſe angle of 100 or 120 degrees; the ends G and I of the bars are to be ſeparated two or three tenths of an inch from each other. Keeping the bars in this poſition, move them ſlowly over the bar A B, from one end to the other, going from end to end about fifteen times. Having done this, change the poles of the bars; i. e. the marked end of one is always to be againſt the unmarked end of the other, and repeat the ſame operation on the bar C D, and then on the oppoſite faces of the bars; the touch thus communicated may be farther increaſed, by rubbing the different faces of the bars with ſets of magnetic bars, diſpoſed as in Fig. 8.

It ſeems that, in order to render ſteel magnetical, we muſt ſo diſpoſe the pores, that they may form contiguous tubes parallel to each other, capable of receiving the magnetic fluid, and then propagating and perpetuating its motion, ſo that the magnetic ſtream may enter with eaſe, and be made to circulate through it with the greateſt

eſt force: to this end it is neceſſary to be particularly attentive in the choice of the ſteel which is to be touched; the grain ſhould be equal, ſmall, homogeneous, and without knots, that it may preſent a number of equal and uninterrupted channels to the fluid from one end to the other: this is the more immediately important in the choice of the ſteel for the needles of ſea compaſſes, for if the ſteel is impure, or the mode of touching improper, the needle may have different poles communicated to it, which will more or leſs impede the action of the principal needle according to their ſtrength and ſituation.

The ſteel ſhould be well tempered, that the pores may preſerve a long time the diſpoſition they have received, and better reſiſt thoſe changes in their direction to which iron and ſoft ſteel are liable. The difference in the nature of ſteel is exceeding great, and is eaſily proved by touching in the ſame manner, and with the ſame bars, two pieces of ſteel of equal ſize, but of a different kind.

Steel that is hardened receives a more perfect magnetiſm than ſoft ſteel, though it does not appear that they differ from each other in any thing but the arrangement of the parts; perhaps the ſoft ſteel contains the phlogiſton in its largeſt pores, while hardened ſteel contains it in the ſmaller. Iron, or ſteel, have very little air incorporated in their pores; when they are ſeparated from the ore, they are expoſed to a moſt intenſe degree of heat; and moſt of the changes to which they are afterwards ſubmitted, are effected in a red hot ſtate. A piece of ſpring-tempered ſteel will not retain as much magnetiſm as hard ſteel, ſoft ſteel ſtill leſs, and iron ſcarce retains any. From ſome experiments of

Mr.

Mr. Muſchenbroek, it appears, that when iron is united with an acid, it will not become magnetical; but if the acid is ſeparated, and the phlogiſton reſtored, it will become as magnetical as ever.

The dimenſions and ſhape of a magnet will make a difference in its force, therefore the bars to be touched ſhould neither be too long nor too ſhort, but in proportion to the thickneſs: if they are too long, the paſſage of the magnetic matter coming out of one pole, and proceeding round the magnet to enter the other, will be impeded, and its velocity leſſened. If they are too ſhort, the fluid which comes out from one pole, will be repelled and thrown back by the other acting parts of the magnet, and thus be carried too far from the pole into which it ought to enter, and prevent the continued circulation of the magnetic matter. If they are too thin, then the number of pores are too few to receive a ſtream ſufficiently ſtrong to reſiſt the obſtacles in the external ſpace, while, if too thick, the ſtraight and regular direction of the channel is injured by the difficulty which takes place in the arrangement of the interior channels, as the magnetic matter has not ſufficient force to penetrate the ſteel to any conſiderable depth, and thus injures the circulation of the fluid.

All the pieces ſhould be well poliſhed: it is of the greateſt importance that the ends ſhould be flat and true, ſo as to touch, in as many points as poſſible, the ends of ſoft iron, which keep up the circulation. Inequalities on the faces, but principally near the poles, are to be avoided, as theſe occaſion irregularities in the circulation, and thus diminiſh its velocity; which is one of the principal ſources of magnetic power.

While the bars are touching, the ends of ſoft iron ſhould be kept in conſtant contact with the bars; for a momentary ſeparation is ſufficient to deſtroy the effect of the operation, as the fluid will be inſtantly diſperſed in the air.

The operator ought not to ſtop longer on the firſt bar than is neceſſary to open the pores, and to arrange them magnetically, paſſing immediately to the other, to form an opening for the fluid which iſſues from the firſt.

It is moſt advantageous to turn the bar that is quitted, while the touching magnets are placed on the other: by this means the ſtream that is to be excited will diſpoſe the channels of the firſt, and thus render the operation more efficacious; beſides, by only turning one bar at a time, the touching-bars need never be totally removed during the whole operation: a circumſtance which will contribute to the ſtrength of the magnet.

The touching-bars ſhould never be ſeparated but at the equator of the magnet; and their motion over the others ſhould be ſlow and regular.

The magnetic powers of touching needles has been increaſed by leaving them for ſome time in linſeed oil.

It may contribute to the effects of the operation, if the bars A and B, fig. 6, are placed in the direction of the magnetic meridian, and are inclined to the horizon in an angle equal to the dip of the needle.

The fixed power, thus communicated to a magnet, is impaired if it is laid amongſt iron, or by ruſt. It may be injured

injured alſo by fire, as each of theſe circumſtances will change, or confuſe the direction of the magnetic ſtream.

Place a ſmall magnetic needle on the point of one of the ſmall ſtands, and put it between two magnetic bars, ſo that the north end of the bar may be near the ſouth end of the needle; the ſmall needle will, without any apparent cauſe, be thrown into a violent vibratory motion, and ſeem as it were animated, till it is ſaturated with magnetiſm; when it will become quieſcent. The vibratory motion is probably occaſioned by the irregularity of the impreſſions it receives from the magnetic fluid, and the difficulty that fluids find in entering the needle.

All cauſes that are capable of making the magnetic fluid move in a ſtream, will produce magnetiſm in thoſe bodies which are properly qualified to receive it.

If bars of iron are heated, and then cooled equally, in various directions, as parallel, perpendicular, or inclined to the dipping needle, the polarity will be fixed according to their poſition, ſtrongeſt when they are parallel to the dipping-needle, and ſo leſs by degrees, till they are perpendicular to it, when they will have no fixed polarity; but if, upon cooling a bar of iron in water, the under end is conſiderably hotter than the upper, and the upper end is cooled firſt, it will ſometimes become the north pole, but not always. If iron or ſteel undergo a violent attraction in any one particular part, they will acquire a polarity: if the iron is ſoft, the magnetiſm remains very little longer than while the heat continues. Lightning is the ſtrongeſt power yet known in producing a ſtream of magnetiſm: it will in an inſtant

render hardened ſteel ſtrongly magnetical, and invert the poles of a magnetic needle.

To make a magnetical bar with ſeveral poles, place magnets at thoſe parts where the poles are intended to be, the poles to be of a contrary name to thoſe required; and if a ſouth pole is fixed on one part, the two next places muſt have north poles ſet againſt them: conſider each piece between the ſupporters as a ſeparate magnet, and touch it accordingly.

To produce Fire from Two Cold Liquors.

MIX together 2 drachms of oil of cloves, and 2½ drachms of the ſpirit of nitre, made with oil of vitriol. Let the mixture be made by pouring the acid at once upon the eſſential oil, and they inſtantly take fire.

This is an experiment very ſurprizing, and very often ſpoken of; but ſometimes attempted without ſucceſs. He who buys his ingredients at the next chemiſt's, may eaſily be diſappointed; for one of them may be adulterated, and the other made by a wrong proceſs. Though the ſpirit of nitre made with the oil of vitriol, will take this effect, neither oil of vitriol itſelf, nor ſpirit of nitre, made in the old way, will do it: nay, the very ſpirit made with the vitriolic acid, is, for certain reaſons, ſometimes diſtilled from ſuch proportions, that it will not anſwer. The proceſs is eaſy; and he who would perform the experiment to his ſatisfaction, would do well to draw the acid off himſelf, in a particular

cular proportion. If it be made according to the following directions, it will never fail.

Let a quantity of purified nitre remain ſometime in a warm place, that it may be perfectly dried; pound it to a groſs powder, and put it in the ſame place again, to be dried more perfectly; then put into a glaſs retort a pound and one ounce of this ſalt, and a pound and two ounces of good oil of vitriol; lute on a receiver, and ſet the retort in a ſand-furnace; make but a gentle fire, and raiſe it only gradually; never let it be higher than is juſt ſufficient for driving over the ſpirit. The diſtillation being finiſhed, keep this ſpirit carefully ſtopped.

This will never fail of firing the oil of cloves; nor is that expenſive oil neceſſary for the experiment; for it will, when thus made, fire almoſt any of the vegetable or animal oils.

To make Alum Phoſphorus.

REDUCE to a fine powder half a pound of common alum; mix it with two ounces of dry wheat-flour; grind theſe together, and put the powder into an iron-diſh or ladle, ſet it over the fire, and it will melt. Keep ſtirring it about till it concrete into a dry maſs again; then reduce it a ſecond time to powder; put this into a ladle, and burn it again till it be of a dark brown colour, nearly black. Remove this from the fire, and put the powder into a tall phial: ſet this upon a little ſand in a crucible, and pour ſand about it; then ſet it on a naked fire, and make the bottom of the crucible red hot: keep the fire at this degree for twenty minutes. After this, ſtop the phial with a cork, and then

then remove the crucible from the fire. Let all cool; then take the phial out of the ſand, and put it up in a dark place. This is the alum phoſphorus; or, as ſome call it, the black phoſphorus. At any time, if a little of this powder be poured out of the bottle, it takes fire of itſelf, and burns away to a coal or cinder. The beſt method of ſhewing its effect, is by pouring it out upon a piece of coarſe paper, which has been hung up in a damp place.

The Phoſphorus of Urine.

THIS is the moſt conſiderable of all the bodies that have been called Phoſphori; and it is the moſt troubleſome to be made. Many proceſſes have been given for it; but many who have tried them after the authors, have failed of ſucceſs. Whether this has been owing to their fault, or that of thoſe who have laid down the inſtructions, is not eaſy to ſay; however, the following is leſs difficult than many. It is very nearly that by which Boerhaave made it; and is very exactly the proceſs by which I have aſſiſted in making it.

Boil about twelve or fourteen gallons of freſh urine in a very large veſſel, and with great care, that it do not boil over, till it be reduced to a ſmall quantity, and have the conſiſtence of honey; take this out of the veſſel in which it was boiled, and ſet it in a glaſs in a warm room: let it ſtand a long time, for it is neceſſary it ſhould putrefy; and this does not come on ſuddenly. When it has been thoroughly putrefied, put it into an iron pot, ſuch as is uſed for diſtilling ſpirit of hartſhorn in large quantities, and lute on an alembic head of earthen

earthen ware, ſuch as are made for thoſe pots. Lute on the head very firmly; and fix to the noſe a long pipe; admit this into a large receiver. When all is thus ready, make a fire under the pot, and raiſe it by degrees to a great height: an alkaline ſalt is ſublimed, and afterwards a yellow oil comes over; the fire is then to be increaſed, ſo as to keep the bottom of the pot red hot for ſome time; a thicker oil and a ſecond ſalt will come over: theſe, if there be uſe for them, may be preſerved: the remainder is now prepared for making the phoſphorus.

Let the pot cool, and take out the reſiduum: throw it into a mortar a little heated, and beat it to a coarſe powder; have ready ſome powdered charcoal; mix with this powdered maſs twice its weight of the powdered charcoal; grind them a little together, and then put the mixture, divided into three or four portions, into ſo many little glaſs retorts; cover theſe with coat of Windſor loam, carefully laid on, to the thickneſs of one-ſixth of an inch. Place theſe in a reverberatory furnace, and fit on large receivers filled with water, to ſuch a height, that the necks of the retorts may be buried an inch and half under the water. Make the fire gradual, but raiſe it at the laſt to the moſt extreme degree. Continue it in this unremitted violence; and after twelve or fourteen hours a blueiſh looking matter will fall from the necks of the retorts in ſmall quantities, and ſink to the bottom of the receivers. This is the phoſphorus. The fire is to be continued as long as any of it can be forced over; and then the veſſels are to be removed and unluted.

The

The phoſphorus now remains in the bottom of the receivers in looſe fragments, and it is to be collected together without taking it out of the water. To this purpoſe a ſmall veſſel is to be put into each receiver, and the quantity of phoſphorus it contains to be got together, and taken out covered with water in this ſmaller veſſel. This veſſel is to be ſet in a ſand-heat, and, by degrees, the phoſphorus will melt as the water continues boiling. When it is thus reduced to a maſs, it is to be put into a proper veſſel, and kept always under water, except when it is taken out to be uſed. The method here laid down, though tedious, is not difficult.

Phoſphorus of Lime.

REDUCE to powder ſix ounces of crude ſal ammoniac, and mix it with thirteen ounces of lime that has been ſlaked by the air, or has lain in the air till it has fallen to powder. Mix theſe very well together, and put them into a crucible big enough to hold twice the quantity. Melt them together in a ſtrong fire, and as the matter ſwells and riſes up, ſtir it about with a ſpatula: when it runs perfectly in every part, remove it from the fire, and pour it out into the bottom of a mortar; let it cool, and preſerve it in a wide-mouthed glaſs well ſtopped.

At any time when a piece of this is ſtruck upon with a hammer, it takes fire, and burns as it breaks under the blow.

Of

Of Objects for Microscopes.

THE works of nature are the only sources of true knowledge, and the study of them the most noble employment for the mind of man: every part of the creation demands his attention, and proclaims the power and wisdom of its Almighty Author. The smallest seed, the minutest insect, shews the skill of Providence in the aptness of its contrivance for the purposes it is to serve, and displays an elegance of beauty beyond the utmost stretch of art.

The wise in all ages have been sensible of this truth; and, as far as they were able, have studied and enquired into the recesses of nature; but for want of proper helps have frequently been mistaken. As certain principles must first be learned ere we can become masters of any science, so in the school of nature, we must begin with the *minutiæ*, the smallest and most uncompounded parts, ere we can understand the larger and more considerable.

The antients, having only their naked eyes to trust to, were incapable of any great discoveries of this sort: but we are so happy, that by the help of glasses, we can distinguish and examine objects many thousands of times less than what the sharpest eye unassisted can discern. In short, microscopes furnish us, as it were, with a new sense, unfold the amazing operations of nature, and present us with wonders unthought of in former ages.

Who, a thouſand years ago, would have imagined it poſſible to diſtinguiſh myriads of living creatures in a ſingle drop of water? Or, that the purple tide of life, and even the globules of the blood, ſhould be ſeen diſtinctly rolling through veins and arteries ſmaller than the fineſt hair? That thouſands of animalcules ſhould be diſcovered in the *ſemen maſculinum* of all creatures? That not only the exterior form, but even the internal ſtructure of the bowels, and the motion of the fluids, in a *gnat* or *louſe*, ſhould be rendered objects of ſight? Or that numberleſs ſpecies of creatures ſhould be made viſible, though ſo minute, that ſome thouſands of them are leſs than a grain of ſand?

Theſe are noble diſcoveries that enlarge the capacity of the human ſoul, and furniſh a more juſt and ſublime idea than mankind had before, of the grandeur and magnificence of nature; and the infinite power, wiſdom, and goodneſs of the Divine Being.

He muſt certainly be delighted with the works of nature who makes them his ſtudy; ſince every animal, flower, fruit, or inſect, nay, almoſt every particle of matter, affords him entertainment. Such a man can never feel his time hang heavy on his hands, or be weary of himſelf, for want of knowing how to employ his thoughts: each garden or field are to him a cabinet of curioſities, every one of which he longs to examine fully; and he conſiders the whole univerſe as a magazine of wonders, which infinite ages are ſcarce ſufficient to contemplate and admire enough. Indeed, when we compare the ſtructure of a mite with that of an elephant, the largeneſs and ſtrength of the one may ſtrike us with wonder and terror; but we ſhall find ourſelves

quite loſt in amazement, if we attentively examine the ſeveral minute parts of the other. For the mite has more limbs than the elephant, each of which is furniſhed with veins and arteries, nerves, muſcles, tendons, and bones: it has eyes, a mouth, and a proboſcis too (as well as the elephant) to take in its food; it has a ſtomach to digeſt it, and inteſtines to carry off what is not retained for nouriſhment: it has an heart to propel the circulation of its blood, a train to ſupply nerves everywhere, and parts of generation, as perfect as the largeſt animal. Let us now ſtop, look back, and conſider, as far as our abilities can reach, the exceſſive minuteneſs of all theſe parts; and if we find them ſo ſurpriſing and beyond our ideas, what ſhall we ſay of thoſe many ſpecies of animalcules, to whom a mite itſelf is in ſize, as it were, an elephant.

All theſe and numberleſs wonders more the microſcope can exhibit to us. I have deſcribed this noble invention in the *Introduction to uſeful Knowledge*, and ſhall now point out ſome objects for the curious to examine by it.

1ſt. The ſilver-tree; in the preparing of which obſerve the following directions: Diſſolve a little ſilver in a ſmall quantity of aquafortis; when this is done, add twice the quantity of common water to it, and the preparation will be made. When you apply it to the microſcope, drop a little upon a plain glaſs, and put therein a ſhort piece of ſmall braſs-wire, and immediately trees will appear growing; which may be obſerved till it has ſpread as far as the liquid extended.

2d. The cryſtallization of ſalts are curious objects, and prepared in the following manner: — Diſſolve a little

little ſal-ammoniac in common water, place it upon the glaſs as above directed; and while you are viewing it, hold a hot iron near the glaſs, in order to make it more expeditious in evaporating; which, as ſoon as it takes place, imitates the branches of trees, and diſplays ſuch beauty, as will fill every beholder with wonder and admiration. N. B. Every different kind of ſalt forms a different figure.

3d. A variety of other curious collections will be found highly entertaining, viz. 1. The fly. 2. Louſe. 3. Mites in cheeſe. 4. Scales of fiſhes. 5. Eels, ſerpents, or little worm-like animalcules found in vinegar and paſte. 6. Animalcules in ſeveral infuſions. 7. Feathers. 8. Hair. 9. Wings of flies. 10. Flies which infeſt fruit and other trees. 11. Sting of a bee. 12. The human ſkin. 13. Tranſverſe cuttings of wood. 14. The beard of a wild oat. 15. Mouldineſs. 16. Small ſeeds, &c.

This ſmall claſs of objects is but trifling in compariſon of the inexhauſted ſtore which abounds in every part of the creation; and there is not a particle of matter but what affords amuſement for the microſcope.

THE END.